


MICROPHONE DESKS

ME-F25DP / ME-F25DPG

These two microphone desks have a 25 cm flexible gooseneck, which allows for the most appropriate position adjustment for the operator. Their output level can be internally configured to match the installation's request.

Both models have a Talk push-button, bi-colour LED indicator and priority paging function. The ME-F25DPG also includes a 4 tone chime and an electronically lockable Talk push-button.

| | ME-F25DP | ME-F25DPG |
|----------------------------|--|-------------------------|
| System | Electret | |
| Directionality | Unidirectional – cardioid | |
| Functions | Priority | Priority + 4 tones gong |
| Power supply | 9 – 24 V.d.c., external or through DIN connector | |
| Output impedance (1 kHz) | Balanced: 600 Ω ; Unbalanced: 300 Ω | |
| Frequency response | 200 ÷ 15.200 Hz | |
| Microphone sensitivity | - 37 dB | |
| (1 kHz and 1 µbar) (±4 dB) | | |
| Output signal | - 30 / - 60 dBm, selectable | |
| Signal / noise ratio | > 55 dB | |
| Dimensions (mm) | Stand: 122 x 155 x 40; Flexible support: 250 mm / Ø 8 mm | |
| Weight | 1.2 kg | |
| Finishing | Bayblend plastic | |
| Consumption | 20 mA | 30 mA |
| Controls | Talk kev | Talk / Gong + Talk kev |

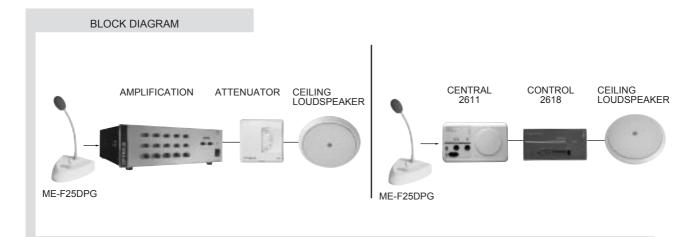

MICROPHONE DESKS

