

Path Planning For Autonomous Vehicles

Jonathan Dorsey *Member: No Sleep Club: est. 2017*
<https://github.com/JonnyD1117/python-path-planners>

Abstract—This work introduces the problem of path planning for mobile autonomous vehicles, in static environments. It focuses on the practical context surrounding path planning such as occupancy grid maps, simultaneous localization and mapping (SLAM), and graph generation culminating in a survey of several fundamental planning algorithms, their pros and cons concerning both performance and computational efficiency. These algorithms include A*, Dijkstra’s shortest path, Rapidly Exploring Random Trees, and Probabilistic Road Maps. Each of these algorithms has previously been the state-of-the-art in path planning for mobile robots, and provides the theoretical foundation upon which modern path planners are often synthesized. This paper concludes by identifying the strengths and weaknesses of each planning algorithm, with suggestions concerning their most appropriate applications, and finally concludes by a discussion of possible extensions of path planners into dynamic environments by the inclusion of a local planner.

Index Terms—A*, Dijkstra, PRM, RRT, path planning, mobile robots, autonomous vehicles

I. INTRODUCTION

ROBOTICS is a broad, complex, and multifaceted field of study that integrates a wide range of technical disciplines. One of the most visible applications of robotics, in the public consciousness, is the emergence of autonomous vehicles. The task of automating the movement of a vehicle or robot in a safe, practical, and reliable manner is a complex field of study that investigates many tough societal and technical issues. In particular, one of the most fundamental challenges is that of **path planning** since the creation of a feasible path for the system to traverse is usually the first step in the process of navigating in complex environments.

The broad objective of this paper is to survey the most fundamental and popular path planners in use today, to implement these planners in Python, juxtapose their relative merits, and to contextualize the process of constructing and using these planners from the building blocks of raw sensor input to the final output of waypoints being fed to a controller.

II. THE PATH PLANNING PROBLEM

As it applies to mobile robotics, the path planning problem can be stated as, the task of generating a feasibly traversable sequence of waypoints (aka a path) between a starting position and a target destination. The creation of this path is possibly subject to heuristics, a cost-function, or set of constraints and in its’ most general form, allows for the inclusion of dynamics obstacles, in the environment.

It should be immediately obvious that this definition describes a very broad class of physical environments, path planning algorithms, and path generation criteria. However, with the

inclusion of a few notable exceptions, most path planners that are described by the previous definition will require a solution that plans in realtime, to handle the dynamic elements within an environment. This is not always desirable, reasonable, or even realizable depending on a robot’s intended function and available computational resources. Often, assumptions like these need to be relaxed and simplified as a compromise to reaching a feasible solution.

A. Offline Planning for Static Environments

In many cases, the assumption of a static environment is not only a sufficient model but also simplifies the problem statement significantly unlocking the ability to use more flexible and lightweight path planners. While applying this assumption certainly limits the scope of the path planners utility, the scenario of planning through a static environment is frequently a very useful benchmark as a means of comparing the relative merits of different algorithms and planning mechanisms since the environment is time-invariant. As the objective of this paper is to present and compare a handful of fundamental path planning algorithms, the rest of this paper makes the assumption that path planning is occurring in a static environment.

III. PREREQUISITE CONCEPTS

Like many other domains, within the study of robotics, path planning involves the understanding and implementation of concepts borrowed from other disciplines. This section attempts to present key concepts and details in hopes of anchoring the following discussion about path planners by first contextualizing some of the important tasks, principles, and assumptions that are fundamental in the design and implementation of the several planners covered in this paper.

A. Maps & Mapping

One of the most fundamental requirements for any path planning system is to develop an understanding of where it is in the physical world. It would be impossible for a robot to navigate its environment without ability to know where it currently is and what its final destination or goal state is. This implies a need for a robot to generate a representation of its environment which it can use to solve its problems.

By definition, a physical environment is the ground truth representation which we would like the robot to understand; however, this is typically impossible because of intrinsic limitations. The best that we can do is to embed as much information as possible about the physical world into a simplified representation. This is known as mapping.

Mapping is the process of extracting useful features or landmarks, from within an environment, and structuring these features into a, compressed and lossy representation/idealization generated from the original environment. These representations can be anything from dense 2D/3D lidar point clouds to abstract features; however, one of the primary tradeoffs when generating a map is the balancing of simplicity, size, and data quality. More often than not, maps are chosen to be as simple as possible while attempting to preserve feature quality (e.g limit uncertainty), in a way that is still capable of solving the problem at hand.

Finally, the representation we use in a map has a tremendous impact on the fundamental design and limitations concerning how a path planner functions. Additionally, the concept of map generation is closely tied to the topics of sensing and localization, in the topic of SLAM, which is itself a very in-depth sub-field of robotics.

1) Dimensionality Reduction & Discretization: In the era of computers, map generation routinely tradeoffs quality and quantity of information for portability and efficient access by a computer. This typically means that maps must be compact enough to fit into memory. Even though robots exist in a three-dimensions of space, it is often sufficient to navigate the 3D world, by planning a path in a 2D projection. This technique is called **dimensionality reduction**.

Unfortunately, even a 2D continuous map is often computationally untractable, with modern computers. The most common solution for this problem, not just in robotics but also in numerical methods, is to discretize the continuous domain into discrete grids or cells. By doing so, the computer can efficiently store and query a map in RAM. The side-effect of discretization is an unavoidable loss/degradation of the original information.

While undesirable, carefully parameterization and clever discretization methods aid in mitigating lossy behavior, or ensure that any degradation of quality is functionally insignificant to the problem at hand. There are several popular discretization schemes, with the most common listed below.

- Uniform Grid
- Quad Tree (2D discretization)
- Oct Tree (3D voxelization)
- Delaunay Triangulation (2D or 2D Mesh generation)

Generally, the most commonly used method is a uniform discretization. This structure is intuitive, simple to understand, and fast to implement in code; however, uniform discretization is subject to the curse of dimensionality. Whenever an environment is large and requires a high resolution, uniform grids become slow to search and expensive to store. In these situations, a clever trick is to partition a space into a non-uniform grid structure using Quad or Oct trees. These data structures are built so that they will keep the grid as large as possible unless it is a region of the map that is determined to require higher resolution.

2) *SLAM:* Frequently, there exists situations where functional maps do not exist for a given environment, and they must be either preprocessed or computed on the fly by the robot as it traverses the environment. The latter operation is known as **Simultaneous Localization & Mapping** or SLAM for short. SLAM is an incredibly detailed field of study with many different approaches from EKF SLAM, Graph SLAM, RGBD SLAM, and other vision based SLAM algorithms

For the purpose of this paper, it suffices to say that without a complete or partial mapping of the environment, the robot will first have to construction the map before its able to fully plan a path through the environment. While important, for the planners implemented in this paper, we assume that map has already been generated and has been provided to the path planner offline.

3) *Occupancy Grid Maps:* One of the most popular mapping representations is that of the **occupancy grid map** (OGM), also referred to as a probability grid map or PGM. As the name implies, this map is composed of a grid; however the unique distinction of an OGM is that it each grid is associated with a value (more specifically a probability) ranging from $[0, 1]$. This value indicates the probability that that grid cell is occupied. Zero indicates completely free and one indicated completely obstructed, with any value between indicating the likelihood of occupancy.

One of the many advantages an occupancy grid map possesses is how computers store and process them. If we assume a 2D grid map with a uniform discretization, the grid map effectively becomes a grayscale picture of size $m \times n$ pixels and a resolution of $2^d - 1$, where "d" is the bit depth. The similarity between occupancy grid maps and grayscale images is so complete that most grid maps are actually stored as 8-bit grayscale images within the computer. This is very practical as many programming languages have libraries that can easily read in images and perform operations on them. The remainder of this paper assumes that every map is encoded as a occupancy grid map.

B. Graph Generation


While not universally true, graph-based planners have historically been the most popular and practical implementation for defining non-trivial sized maps. For the purposes of this paper, all of the planners that we will cover are graph-based and use some variant graph-like datastructure (e.g. graphs or trees).

1) Grid World: One of the most common approaches to constructing a graph is the notion of directly converting each cell of an occupancy grid map, and then applying rules for how to wire up the edges between each of these nodes. This is called a **grid world**. The uniform node generation and rule-based edge generation of this graph mean that this graph is intuitively very and extremely simple to implement programmatically.

The two most popular connectivity rules are known as **connected-8** and **connected-4**. In connected-4, the rules that we imposes on transitioning to a new cell limit legal

moves to up/down/left/right (no diagonal motion is permitted.) while connected-8 graphs allow to move 1 cell in any direction up/down/left/right and diagonals. In addition to these connectivity rules, there are two different methods concerning how obstacles can be integrated into the final graph.

These two methods are **infinite edge weights** and **edge removal**. Infinite edge weighting works by guaranteeing that the shortest (aka lowest cost) path through the graph will never be through an obstacle. Since transitioning to a node that is an obstacle will incur an infinite cost (as far as the planner is concerned), this means prevents obstacles from being included in the final path. On the other hand, the edge removal method simply removes all edges that would connect to an obstacle node, in the graph. This method works by literally making it impossible for the planner to traverse obstacles as they have all been removed from the graph.



2) *Random Sampling*: One of the downsides of grid world search graphs is the node density. By definition, every pixel of the occupancy grid map could represent a free cell, and is subject to the curse of dimensionality as the size of the map increases. To address this scaling problem, a popular technique is to employ **random sampling**. This approach is based on the concept of Monte Carlo methods, where uniformly sampling map is used to create the nodes on the graph.

In principle, in the limit as the number of samples approaches infinity, we can guarantee the convergence of our path planner to the globally optimal path (if it exists). In practice, sampling-based methods can possess an order of magnitude fewer nodes while still providing enough coverage at a high enough sample density to produce a feasible path through the environment that is trending towards the global optimal path. An excellent example of this is shown in the probabilistic road maps algorithm.

3) *Obstacle Inflation*: One of the pitfalls of using occupancy grid maps as the basis for the search graph is that each cell is effectively a pixel in an image. Depending on the density of our sensor coverage, there is a non-zero chance that paths through the environment that are only a single pixel wide exist. This is a problem for our robot if it happens to be larger than the adjusted realworld scale of the pixel. This is almost always the case.

To prevent situations like this from occurring and generating paths through infeasible regions of the map, we can apply a technique known as an obstacle inflation. This very simple technique artificially scales up every obstacle pixel in the scene take up more space than the actual sensor reading indicated. The result of this **inflation** is that sensor noise is usually absorbed into these inflated obstacles. Additionally, this technique provides a sort of poor-man's approach to prevent the phenomenon of "wall-hugging". In simple implementations

of path planner, the planner does not have a concept of "robot size". This means that the planner will attempt to make the shortest path between two points, even if that path is infeasible for the robot to traverse. This is demonstrated as a sort of type of behavior where the path generated hugs walls in the environment to attempt to reduce the distance (total cost) of the path. By applying an appropriately sized inflation layer, we can guarantee that the path between points, accounts for the physical footprint of the robot. While nifty, there are more sophisticated techniques based on applying cost gradients as a function of the distance away from an obstacle/wall. The cost gradient incentivizes the planner to prefer cells that are farther away from walls; however, this requires more postprocessing of a map.

IV. PATH PLANNING

In the domain of robotics, there are hundreds if not thousands of different path planning implementations some of which present totally new formulations for planning but most present incremental improvements that decrease the compute time or resources, or optimize some customized metric. The goal of this paper is to present a handful of the most popular (and historically important) path planners that have made a significant impact in robotics and have become de facto standard benchmarks against which all other planning algorithms compare their performance.

This paper will cover A*, RRT, PRM, and Dijkstra's Shortest Path. Each of these algorithms is graph-based in so much as they utilize a graph or tree as the datastructure from which the algorithm will attempt to generate the shortest path. While algorithms like A* and Dijkstra typically can be given a preexisting graph to traverse, algorithms like RRT and PRM implement a form of Monte Carlo random sampling to generate the graph/tree that they traverse directly as part of the planner. This section will cover each of the aforementioned algorithms in broad strokes, describing the general construction and planning mechanism(s) at play.

A. Global vs Local Planners

Before diving into the details of each planner, it is important to clear up the role these planners and how this role effects the type of planning being performed in the system. Planners can generally be categorized as either **global** and **local** planners.

A global planner provides an idealized "global" path between the starting location and the target destination. Typically this plan is optimizing some metric(s) such as shortest distance, curvature constraints, and/or static object avoidance. In a perfect world, an autonomous robot/vehicle would only require a global planner and a means of localizing itself (from sensor measurements); however, dynamic/uncertain obstacles coupled with imperfect sensing, mapping, and localization require robots to be more robust to uncertainty. The planning algorithms shown in the paper are all examples of global planners, as we have already made the assumption that the environment is static.

To combat this environmental uncertainty, roboticists developed the idea of local planners. Functionally, a local planners' job is to account for uncertainty and to generate paths that deviate from the global path to maintain a feasible and unobstructed path, within the environment. Additionally, local planners can include computation to smooth the global path and providing waypoints to the control system. However, these planners are more than just post-processing of the global path in so much as they need to be aware of the pose, dynamics, kinematics, constraints, and sensor inputs of a robot, to enable the planner to deviate from the global path as needed.

B. Path vs Motion Planning

Frequently, the terminology of path planning is conflated with that of motion planning. While related, these concepts are very different and each solves a different problem. In path planning, as has been mentioned previous, the objective is to find the path through an environment that optimizes some metric and obeys specified constraints. Typically this metric is distance and the constraint is to maintain a feasible and obstacle free path between the starting and ending points.

Motion planning, on the other hand, uses path planning as an input to determine how the path should be traversed through time. This means not only planning the position of the path (e.g path planning) but also planning the velocity, acceleration, and often the jerk of a robot as it follows the given path. Almost always, motion planning requires the ability to compute derivatives of the path position.

C. Planning Algorithms


The first category of planning algorithms are so-called **Graph-Search**. The primary mechanism these planners employ is to construct a graph from a map. Once this has been achieved, different algorithms, heuristics, and operations can be applied to the graph to endeavor to find the shortest path between two nodes that exist in that graph. Occupancy grid maps are ideal for the such path planners in that it is trivial to translate the grid map into a graph datastructure by assuming that every pixel in the grid map is node in the graph, and then formulate the connectivity rules as desired (see **connected-4** or **connected-8** above).

1) *Dijkstra's Shortest Path*: The grandfather of almost all graph-search planners is Dijkstra's shortest path algorithm. This algorithm invented by Dutch mathematician Edsger Dijkstra in Norway in 1956. This algorithms implements a type of breadth-first search that will traverse an undirected graph, until it has found the shortest route between two nodes within the graph.

The implementation found in this paper for Dijkstra's algorithm uses an occupancy grid map to generate a dense graph. Cells in the map that have an occupancy value over a certain threshold are assumed to be occupied. The algorithm works by computing the cost of the current node, and then determining the total cost of each neighbor from the current node. The neighbor with the least cost is expanded in the

same way until either the entire graph has been explored or the path from the start and end nodes has been determined. See algorithm for more details.

While this algorithm is simple and guaranteed to find the shortest path in the graph, assuming it exists, it cannot predict the efficiency of how well it is at finding the shortest path. This is predominately attributable to the fact that the algorithm is a generalization of a bread-first search, blindly expanding every node closest to it without any concern to focus the direction of the search towards more likely paths (e.g. in the direction of the goal state).

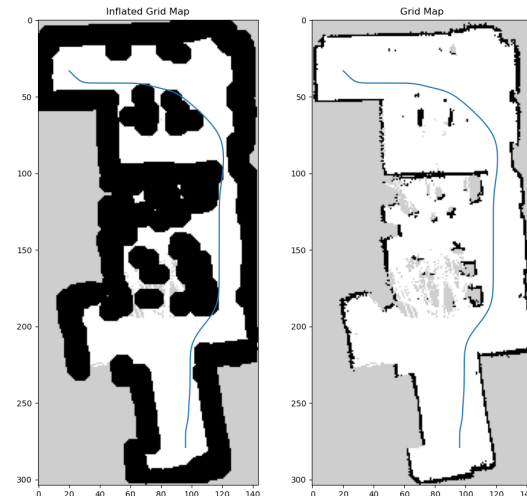


2) *A**: A* is an algorithm that was developed at the Stanford Research Institute in 1968, for the historically significant robot Shakey, being used in some of the earliest pioneering research into mobile robotics. It is both the literal and conceptual successor to Dijkstra's algorithm. Both implement a graph-search; however, the primary improvement of A* is the addition of a heuristic that improves the ability of the search algorithm to focus on expanding nodes in the direction of the goal state.

Unlike Dijkstra's algorithm, the addition of a heuristic proves the planner with the ability to preferentially search in a given direction that will traverse nodes that are more likely to be approaching the goal node from the starting node. So long as the heuristic is quick to compute and admissible (an exact or under estimate of the actual distance to the goal node), we can use a search heuristic to drastically improve the planners convergence rate.

A* is extremely similar to Dijkstra's algorithm described above. The key difference is how A* computes the cost of getting to the current node, and then computes the cost of traversing to each neighboring node plus the addition of a heuristic cost from each neighbor to the goal state. The inclusion of a heuristic cost allows A* to preferentially choose to visit neighbors that are closer to the goal state by choosing the neighbor with the lowest combined current plus heuristic cost. See algorithm for more details.

A* has made a tremendous impact on the world of robotics and is today the defacto standard for simple path planning tasks.

Unfortunately, both A* and Dijkstra suffer from the necessity to generate a graph of the environment. As previously mentioned, this usually involves the conversion of a grid map into graph. While not always an issue, the dimension of the grid map corresponds to the need to generate a larger search graph, which requires either algorithm to spend more time to compute the shortest path. Unlike Dijkstra's, the heuristic driven nature of A* also means that it is typically far more efficient of a search than Dijkstra's algorithm over the same search graph.

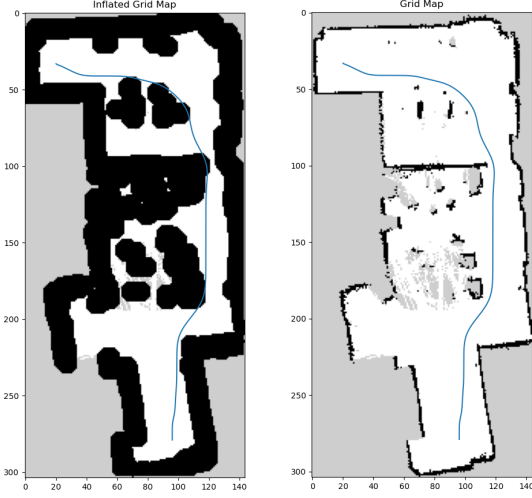


3) *Probabilistic Road Maps*: While graph-search planners have been popular and practical historically, these methods like Dijkstra's and A* can only be as efficient as the size, resolution, and connectivity of the graph they are given permits. Depending on how these graphs were generated, they often suffer from the inability to efficiently scale as the size of a given map increases, leading to unacceptable latency and computation times.

To solve this problem of high graph densities Probabilistic road maps (PRM) were developed. PRM has two main stages graph creation via random sampling, and path computation directly by applying Dijkstra's algorithm. The broad objective of PRM is to decrease the density of the search-graph by applying uniform sampling as the mechanism for generating graph nodes within the map. The compromise this method makes is the reduction of graph generation and graph traversal times in exchange for a lower fidelity map that is no longer pixel accurate to the map.

PRM works by randomly selecting a number of points in within the domain of the map. It will first check whether or not the randomly selected point is an obstacle. If it is it will redraw random samples until it finds a random point that is *free*. This point is then added to an every growing graph, so long as the connection between this new node and the previous nodes in the graph do not intersect obstacles. Once this has been performed for a sufficient number of random samples, the graph or 'roadmap' now exists. The second phase of the algorithm merely selects a starting and target nodes, in the graph and applying a graph-search algorithm between those two endpoints.

This technique is not only faster for the graph generation portion of the algorithm, but since the graph is generated is typically over an order of magnitude less dense than an equivalent grid map based graph, finding the shortest path between two points on this "sampled" graph results in significantly faster graph traversal. It should be noted that unlike the other methods, PRM is only optimal within the limit as the number of samples becomes infinite. This means that unlike A* traversing a dense grid-based graph, PRM with a finite sample size is unlikely to find the optimally shortest path; however it does provide a locally optimal path across its sampled-graph. This behavior demonstrates how PRM needs to be tuned to its targeted application for effective results.

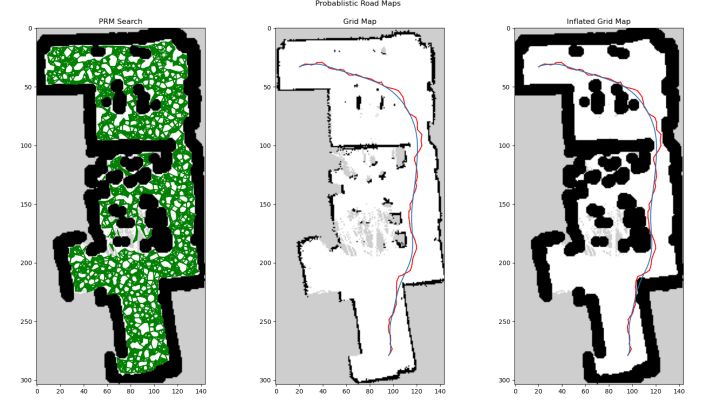

4) *Rapidly Exploring Random Trees*: Similar to PRM, Rapidly Exploring Random Trees (RRT), also attempts to leverage random sampling to improve the sample efficiently and reduce the graph generation time. The primary difference between PRM and RRT is their datastructures and how additional nodes are inserted into this datastructure. While PRM utilizes a graph, the RRT class of algorithms use a tree structure. Tree structures possess several benefits but also impose several constraints on the representation of the map that these algorithms generate.

The most useful aspect of using a tree is how simple it is to determine the final path. Unlike all of the graph-based methods that require iteratively searching over a large portion of nodes in the graph to determine the shortest path, a tree structure is a very simple structure that lends itself to recursive solutions. Since unlike a node in a graph, a node in a tree can only possess one predecessor, one need only begin at the final target node and recursively make a list of each predecessor node we pass through, until we reach the starting node.

Like PRM, RRT will randomly sample its map, check that these random points are not obstacles in the map (resample if true) and then create a tree by tying that random point into the near node of the tree, by taking a step of size towards the random point, from its closest node on tree. At this new location, it will create a new node that is parented to the nearest neighbor previously mentioned.

V. PLANNER IMPLEMENTATIONS

A. Dijkstra Shortest Path

B. A*

Algorithm 1 Dijkstra's Shortest Path

```

Initialize Graph : for node in Graph do
1: node.score :=  $\infty$ 
2: node.visted := false
3: end for
Solve Graph :
4: starNode.score := 0
5: while ( true ) do
6:   currentNode := nodeWithLowestScore(Graph)
7:   currentNode.visted := true
8:   for ( node in currentNode.neighbors ) do
9:     if ( node.visited == false ) then
10:      newScore := calculateScore(currentNode, node)
11:      if ( newScore < node.score ) then
12:        node.score := newScore
13:        node.routeToNode := currentNode
14:      end if
15:    end if
16:  end for
17: end while
Return Path :
18: if ( currentNode == targetNode ) then
19:   return buildPath(targetNode)
20: end if
Raise Error if No Path is Found :
21: if nodeWithLowestScore(graph).score ==  $\infty$  then
22:   return ERROR: No Path Found
23: end if
24: end while

```

C. RRT

D. PRM

VI. PATH SMOOTHING

It should be noted that all of the path planners covered, in this paper, have generated piece-wise linear paths between two discrete points in space. With the exception of a path that only contains two points, the shortest path generated by these planners will always be discontinuous. The nature of this discontinuity is rooted in the discretization applied earlier throughout these planners. Unfortunately, while discretized paths are computationally desirable, they often are incompatible with the robotics system that will use the planners path.

The most obvious reason for such an incompatibility is the requirement for continuous inputs into a controller, state estimator, or other component which are formulated under the assumption of continuous inputs. Secondly, even for discrete systems, it is often more desirable to generate waypoints, for the robot to track, at a much higher sampling frequency, than is practicable to produce with the planner directly. This is especially true when refining the discretization of the map to a sufficient waypoint frequency would make global path planning through the environment untractable.

This need leads to the need for the raw outputs of these planners to be post-processed via a path smoothing algorithm.

Algorithm 2 A* Heuristic Search

```

Initialize Graph : for ( node in Graph ) do
1: node.gScore :=  $\infty$ 
2: node.fScore :=  $\infty$ 
3: node.visted := false
4: end for
Solve Graph :
5: starNode.gScore := 0
6: starNode.fScore := 0
7: while ( true ) do
8:   currentNode := nodeWithLowestScore(Graph)
9:   currentNode.visted := true
10:  for ( node in currentNode.neighbors ) do
11:    if ( node.visited == false ) then
12:      newScore := calculateScore(currentNode, node)
13:      if ( newScore < node.g ) then
14:        node.gScore := newScore
15:        node.fScore := newScore +
          calculateHeuristic(nextNode, targetNode)
16:        node.routeToNode := currentNode
17:      end if
18:    end if
19:  end for
20: end while
Return Path :
21: if ( currentNode == targetNode ) then
22:   return buildPath(targetNode)
23: end if
Raise Error if No Path is Found :
24: if nodeWithLowestScore(graph).score ==  $\infty$  then
25:   return ERROR: No Path Found
26: end if
27: end while

```

Algorithm 3 RRT Construction

Input: q_0 : the configuration where the tree is rooted
 n : the number of attempts to expand the tree

Output: A tree $T = (V, E)$ that is rooted at q_0 and has $\leq n$ configurations

```

1:  $V \leftarrow \{q_0\}$ 
2:  $E \leftarrow \emptyset$ 
3: for i = 1 to n do
4:    $q_{rand} \leftarrow$  a randomly chosen free configuration
5:    $q_{near} \leftarrow$  closest neighbor of q in T
6:    $q_{new} \leftarrow$  node a dist  $\Delta S$  from  $q_{near}$  to  $q_{rand}$ 
7:   if  $q_{new}$  is collision-free then
8:      $V \leftarrow V \cup \{q_{new}\}$ 
9:      $E \leftarrow E \cup \{(q_{near}, q_{new})\}$ 
10:  return  $q_{new}$ 
11: end if
12: return 0
13: end for

```

Algorithm 4 Roadmap Construction

Input: n : number of nodes in roadmap

 k : number of closest neighbors to examine for each configuration

Output: A roadmap $G = (V, E)$

```

1:  $V \leftarrow \emptyset$ 
2:  $E \leftarrow \emptyset$ 
3: while  $|V| < n$  do
4:   repeat
5:      $q \leftarrow$  random sample from Configuration Space  $\mathcal{Q}$ 
6:     until  $q$  is collision-free
7:      $V \leftarrow V \cup \{q\}$ 
8:   end while
9:   for all  $q \in V$  do
10:     $N_q \leftarrow$  the  $k$  nearest neighbors of  $q$  from  $V$  by dist
11:    for all  $q' \in N_q$  do
12:      if  $(q, q') \notin E$  and  $\Delta(q, q') \neq 0$  then
13:         $E \leftarrow E \cup \{(q, q')\}$ 
14:      end if
15:    end for
16: end for

```

As alluded to above, in this paper, the reason for smoothing the outputs of the planner come from desiring a frequency between waypoints.

A. Bezier Path Smoothing

One of the most simple and straight forward methods for path smoothing is that of Bezier curves. While the derivation of Bezier curves is beyond the scope of this paper, sufficed to say that this technique is very effective for quickly computing a curve from the planner output, that is effectively infinitely resolvable.

1) *Bezier Curve Formulation:* The formulation of a Bezier curve is the based on the three following equations.

$$\binom{n}{i} = \frac{n!}{i!(n-i)!} \quad (1)$$

$$B_{i,n}(t) = \binom{n}{i} t^i (1-t)^{n-i} \quad (2)$$

$$C(t) = \sum_{i=0}^n P_i B_{i,n}(t) \quad (3)$$

Where P_i is the point at index i from output of the planner which is of length n and where $B_{i,n}$ is formula for a Bernstein polynomial.

As with the mathematical formulation of the Bezier curve, the implementation of the Bezier, in code, is very direct and straightforward.

2) *Limitation of Bezier Curves:* Unless the length of the planner output is exceeding large, Bezier curves tend to be quick to compute path smoothing algorithm that is very effective for many applications including simple robotic environments or in video games. Unfortunately, the primary drawback of Bezier curves in robotics, is the inability to directly model system or environmental information into the path smoothing process. In the domain of robotics, this typically manifests as the inability to apply custom constraints or guarantee feasibility of the final smoothed path.

While guaranteeing feasibility or respecting applied constraints, might be of little meaningful importance in an application like video games, where the goal is to be good enough while using up the least compute resources, in robotics, obeying constraints and feasibility requirements is a very real necessity.

While not ideal, the Bezier curves does often work for robots in simple environments. Acknowledging this short-coming, this paper, has applied Bezier path smoothing to all of the path planner outputs as a means of quickly and consistently generating a smooth output path.

B. Optimization Based Path Smoothing

The other predominate class of path smoothing algorithms comes in the form of optimization based methods. Unlike Bezier smoothing, these methods work on the principle of minimizing some cost function associated with the points output by the planner. The strength of optimization-based methods involve the natural ability to define and apply constraints to that the solution of the optimizer must obey. For path smoothing, this translates into the ability for these methods to intuitively constraints such that the smoothed path will never intersect with static obstacles in the environment, or violate feasibility by generating a path whose curvature is impossible for the robot to track.

Generally, this method is far more computationally expensive to realize than that of Bezier curves; however, the benefits that it brings are often significant enough for specialize high efficiency variants to be designed specially for real-time robotic applications.

1) *Timed-Elastic Band:* One such method that has been specially adapted for the use with car-like robots (e.g. autonomous vehicles), is that of **Timed-Elastic Band** optimization. This problem is formulated mathematical below.

$$\begin{aligned}
 & \min_{\mathcal{B}} \sum_{k=1}^{n-1} \Delta T_k^2 \quad (\text{NLP}) \\
 & \text{subject to} \\
 & \mathbf{s}_1 = \mathbf{s}_c, \mathbf{s}_n = \mathbf{s}_f, 0 \leq \Delta T_k \leq \Delta T_{\max}, \\
 & \mathbf{h}_k(\mathbf{s}_{k+1}, \mathbf{s}_k) = 0, \quad \tilde{r}_k(\mathbf{s}_{k+1}, \mathbf{s}_k) \geq 0, \\
 & \mathbf{o}_k(\mathbf{s}_k) \geq 0, \\
 & \nu_k(\mathbf{s}_{k+1}, \mathbf{s}_k, \Delta T_k) \geq 0, \quad (k = 1, 2, \dots, n-1) \\
 & \alpha_k(\mathbf{s}_{k+2}, \mathbf{s}_{k+1}, \mathbf{s}_k, \Delta T_{k+1}, \Delta T_k) \geq 0, \quad (k = 2, 3, \dots, n-2) \\
 & \alpha_1(\mathbf{s}_2, \mathbf{s}_1, \Delta T_1) \geq 0, \quad \alpha_n(\mathbf{s}_n, \mathbf{s}_{n-1}, \Delta T_{n-1}) \geq 0.
 \end{aligned} \quad (4)$$

The advantage of this algorithm is that it incorporates a standard vehicle model and produces locally optimal paths. The downside of this method is that it is required to be run online, very similarly to the implementation of Model Predictive Control (MPC).

VII. SIMULATION

From a technical perspective, there is surprisingly little difference between path planning on manufactured simulations that output a occupancy grid map, and a grid map that has been generated from real sensor data. The following is a summary of the simulation... and blah blah blah.

VIII. RESULTS

A. Compute Time

1) Graph Generation: Graph Traversal

B. Path Cost

IX. CONCLUSIONS

Path planning in mobile robotics not only possesses a rich historical background, but also continues to make improvements with the advent of modern computing power.

X. FUTURE RECOMMENDATIONS

- Gradient-based grid map cell weighting(prevent wall hugging)
- Global and Local planners (would be alot better if you did)
- Inflation relaxation to try and find feasible path if initial parameterization is infeasible.
- Curvature or constraint based path smoothing