


FAKM/KIM  
Apt Elev **3950'**  
S28 48.3 E024 45.8

7 FEB 14  
**(10-9)**

KIMBERLEY, S AFR REP  
KIMBERLEY

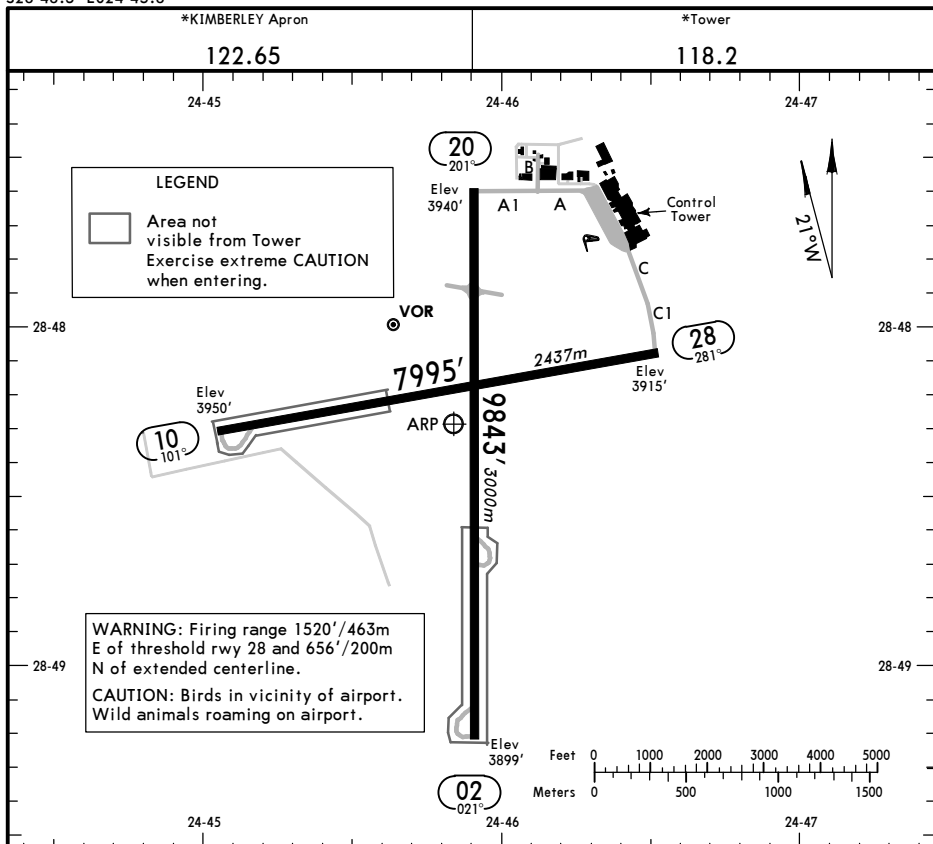

ADDITIONAL RUNWAY INFORMATION

RWY		USABLE LENGTHS		TAKE-OFF	WIDTH
		Threshold	Landing Beyond		
02					
20	1 MIRL (60m) 1 PAPI(angle 3.0°)				151' 46m
10	RL (60m) PAPI(angle 3.0°)				151' 46m
28					

1 Activate on 118.2. Key mike 5 times.

JAR-OPS

TAKE-OFF 1

All Rwy's

LVP must be in Force

RCLM (DAY only)  
or RL

RCLM (DAY only)  
or RL

NIL  
(DAY only)

A			
B	250m	400m	500m
C			
D	300m		

1 Operators applying U.S. Ops Specs: CL required below 300m.

STRAIGHT-IN RWY		A	B	C	D
02	VOR ❶	4260' (361')	4260' (361')	4260' (361')	4260' (361')
		R1500m	R1500m	R1700m	R1700m
20	VOR ❶	4570' (630')	4570' (630')	4570' (630')	4570' (630')
		R1500m	R1500m	C2400m	C2400m

❶ Continuous Descent Final Approach.

CIRCLE-TO-LAND ❷	A	B	C	D
	MINIMUMS NOT YET ESTABLISHED BY S AFR REP CAA			

❷ Entirely at pilots discretion.

TAKE-OFF RWY 02, 10, 20, 28		
LVP must be in force		
RCLM (DAY only) or RL		
A	250m	RCLM (DAY only) or RL
B		
C		
D	300m	NIL (DAY only)

