
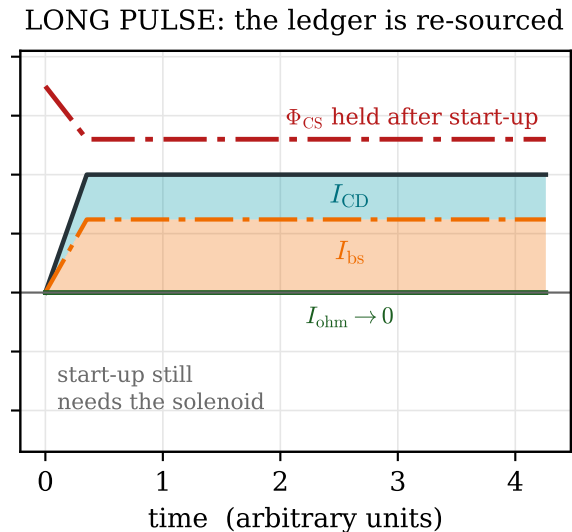


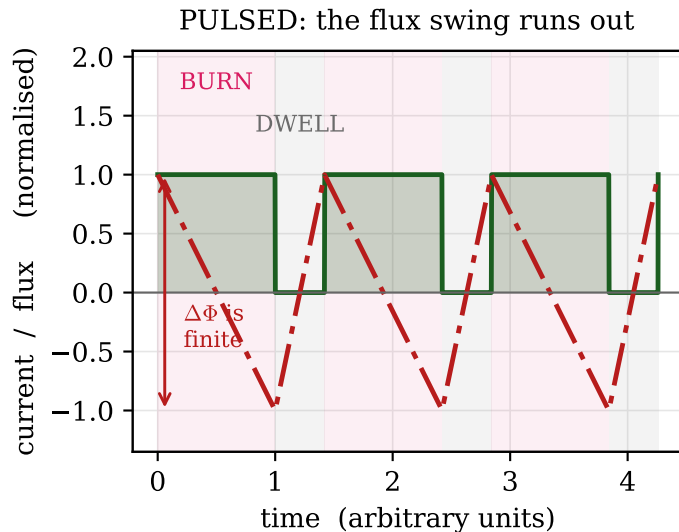

— I_{ohm} — I_{bs} I_{CD} — I_p (total) — solenoid flux Φ_{CS}

Left, the only arithmetic on the figure: $V_{loop} = -d\Phi/dt$ and $I_{ohm} = V_{loop}/R_p$ give $t_{burn} = \Delta\Phi/(I_{ohm}R_p)$ — a finite swing buys a finite burn. (Internal inductance is neglected; start-up consumes part of $\Delta\Phi$ before the burn begins.) Right, the I_{bs}/I_{CD} split drawn is ILLUSTRATIVE: only the sum is constrained here. Neither panel claims its architecture is preferable— each states a different price.