



BROAD PROFILE — heat leaves fast

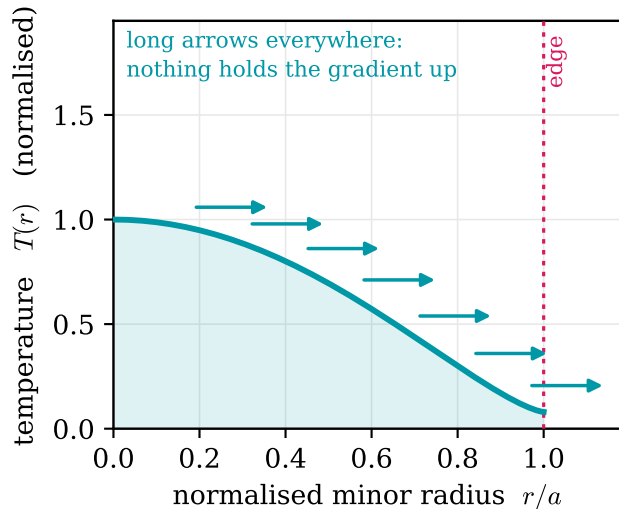

EDGE BARRIER — the same core, held up

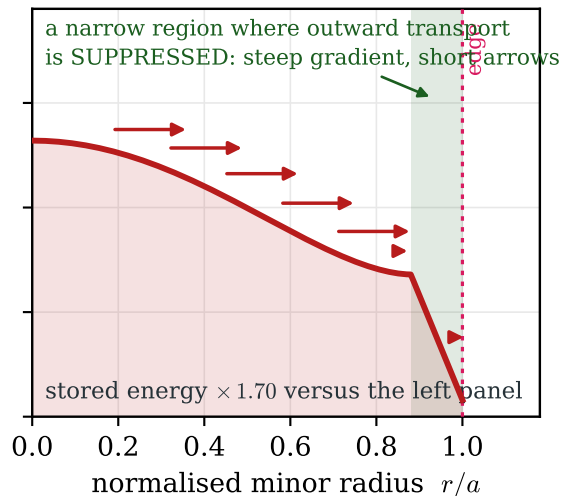

$H \equiv \tau_E / \tau_E^{\text{scaling}}$ is a RATIO TO A FIT, and therefore an OUTPUT. There is no dial marked H on the machine: nothing here is a new coil, a new supply or a new component. What changed is a TRANSPORT STATE, reached empirically and held only while its conditions hold — an input-power threshold, a shape, a divertor configuration — and paid for with edge-localised relaxations and impurity retention. The $\times 1.70$ above is the integral of the two curves drawn here, so even that number is a property of these two shapes, not a design input. Assuming a value of H and then quoting the performance it implies is assuming the conclusion.