


THE ST RADIAL LEDGER — neutron first, magnet second ($A = 2$, $R_0 = 1.87$ m)

one illustrative published allocation, laid out in the order the physics forces

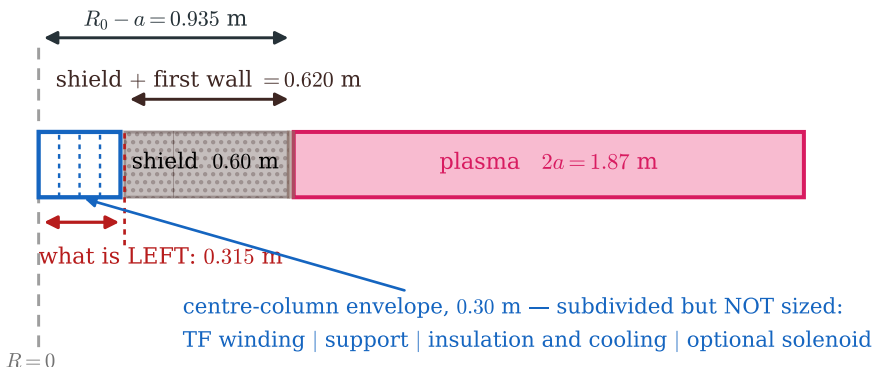

the geometry check, evaluated

$$a = R_0 / A = 1.87 / 2 = 0.935 \text{ m}$$

$$R_0 - a = 0.935 \text{ m}$$

$$0.935 - 0.600 - 0.020 = 0.315 \text{ m}$$

against the study's stated 0.30 m centre column:
a difference of 15 mm.

That 15 mm is NOT spare room. It is the residue of a check that has not yet paid for one cable, one support, one coolant channel, one tolerance, or the current-initiation function. The low- A inboard budget is already measured in centimetres before engineering begins.

ILLUSTRATIVE PUBLISHED ALLOCATION, NOT A UNIVERSAL REACTOR TEMPLATE. The 0.60 m shield, the 20 mm first wall and the 0.30 m column are one study's choices, for one mission and one set of material assumptions. Change the mission and they change. What does NOT change is the ORDER: the neutron shield is sized by neutronics, not by what the magnet would prefer, so the magnet is designed into whatever is left. That ordering is the section's claim, and it is the only claim this figure makes.