
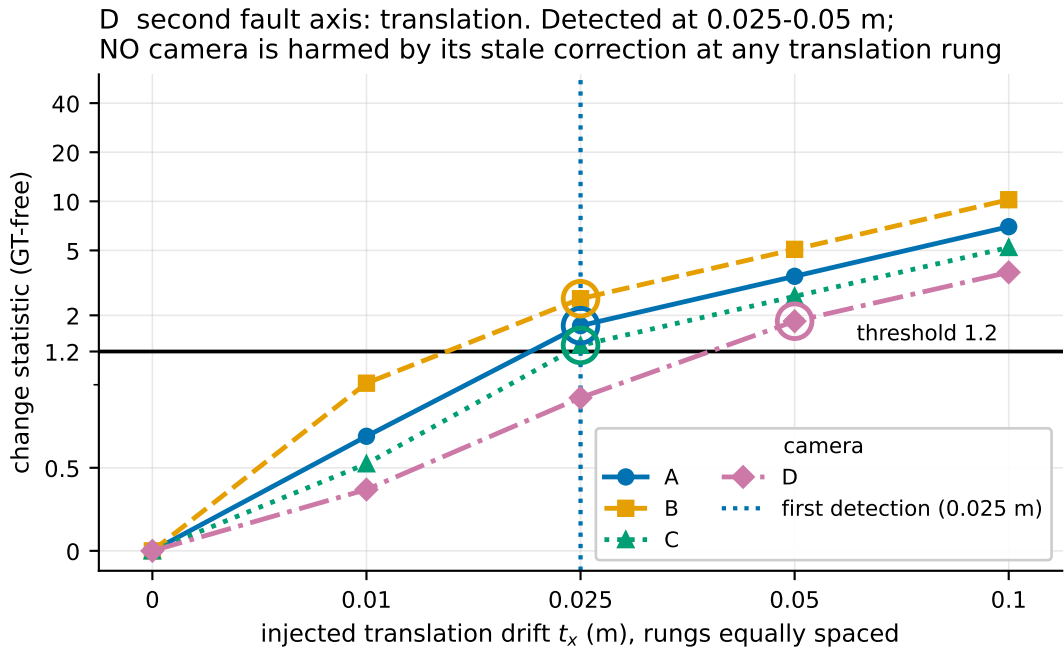
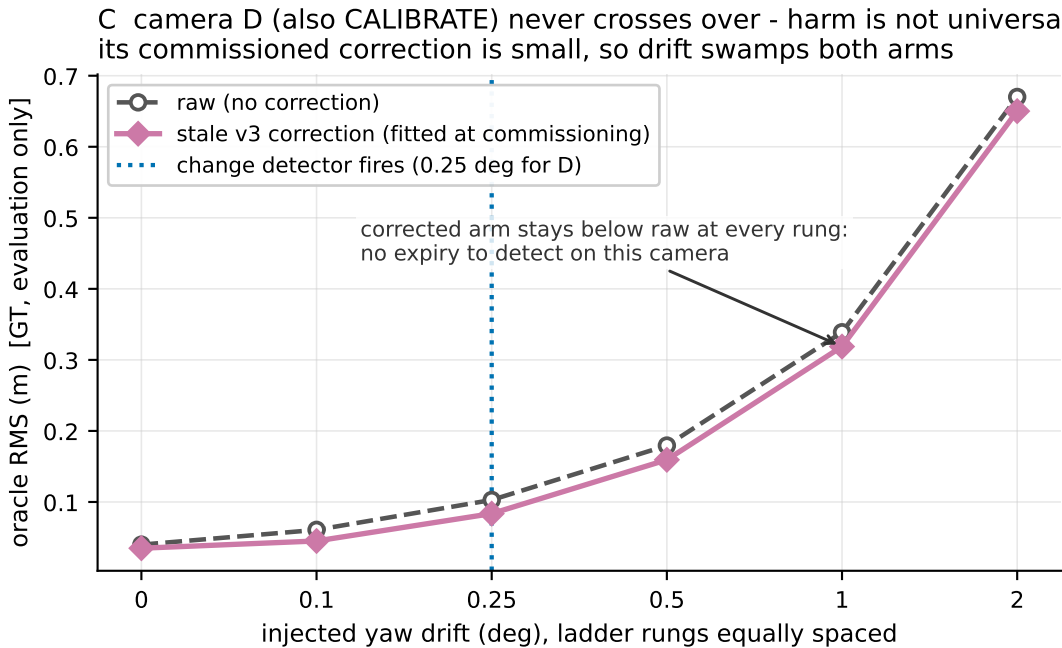
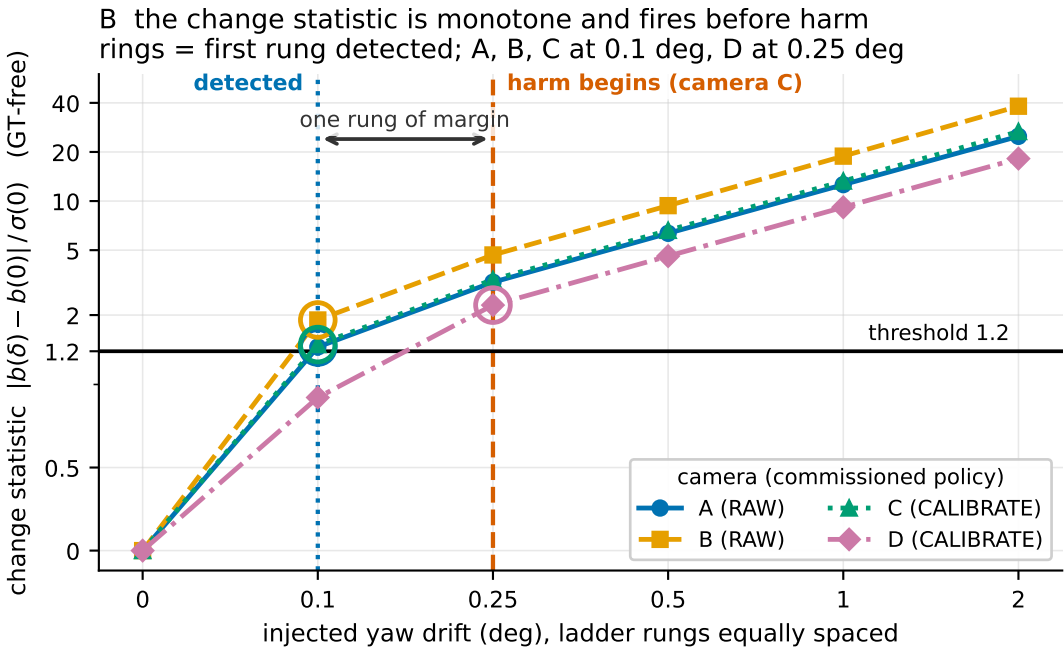


Calibration drift lifecycle (F04): a GT-free change statistic detects yaw drift one rung before the stale correction becomes harmful

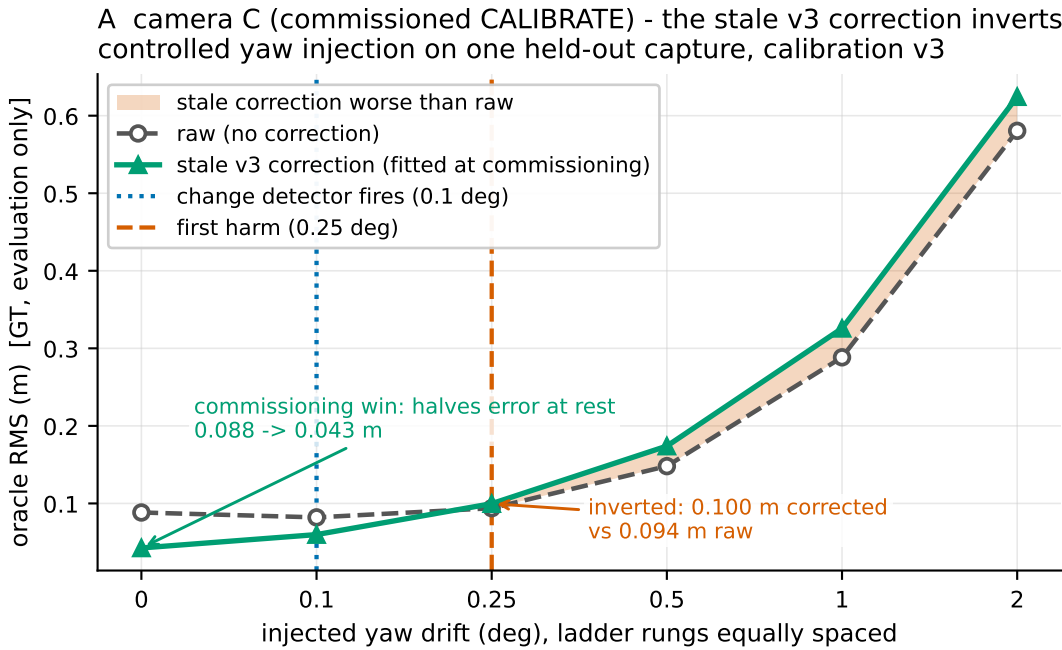

Scope: CONTROLLED step-fault injection on ONE held-out capture (fusion_handover_20260721, held out of the v3 calibration fit), calibration v3.
Identity drift reproduces the deployed projection to 0.00e+00 m over 230 detections. Gate/oracle detections per camera: A 26, B 15, C 90, D 98.
Independent unit: unique camera site; deterministic fault ladder, one magnitude per whole capture (a step, not a ramp). Rungs are the ONLY measured points; segments join them and imply no interpolation. No confidence band is drawn.
This measures a detection THRESHOLD IN DRIFT MAGNITUDE. It is NOT a real-drift detection latency, NOT an in-service false-alarm rate, and NOT current policy. Ground truth (oracle RMS) scores the outcome only; neither detector sees it.