



F28 Dashboard — F24-R01 A4-lower→A3-mid | warehouse\_aws | local\_nogo\_safe\_dist=0.13 | global\_nogo=0.20  
C1: outcome=collision path=5.25m d\_goal=1.47m  
solve\_ms=910μ/1185p95 truth\_err=0.549m min\_obs=-0.059m min\_wall=2.095m  
C2: running / no data


C1 — collision  
path=5.25m min\_d\_goal=1.47m geometry:obstacle\_penetration

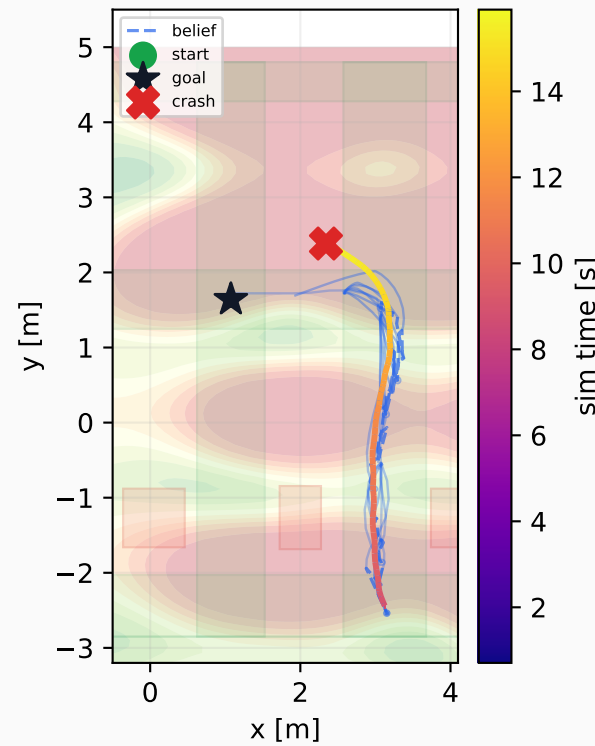


C2 — running  
path=0.00m min\_d\_goal=0.00m

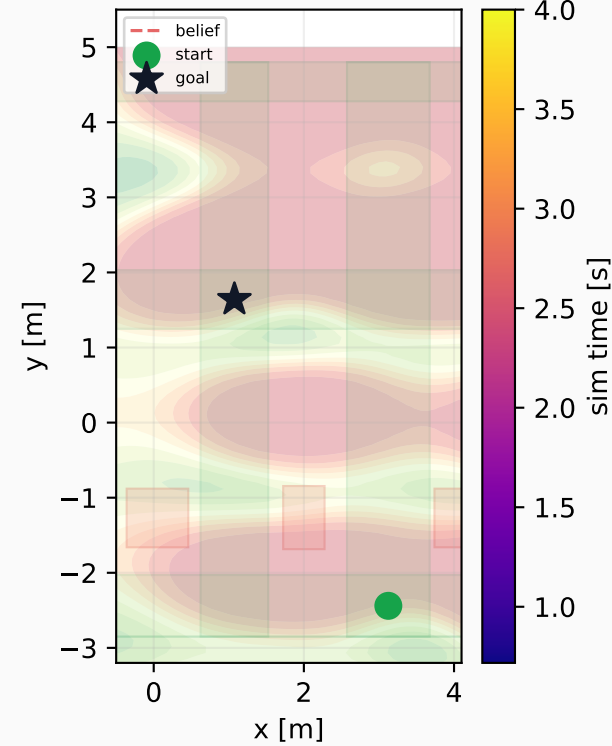


C1 vs C2 truth paths (route comparison)

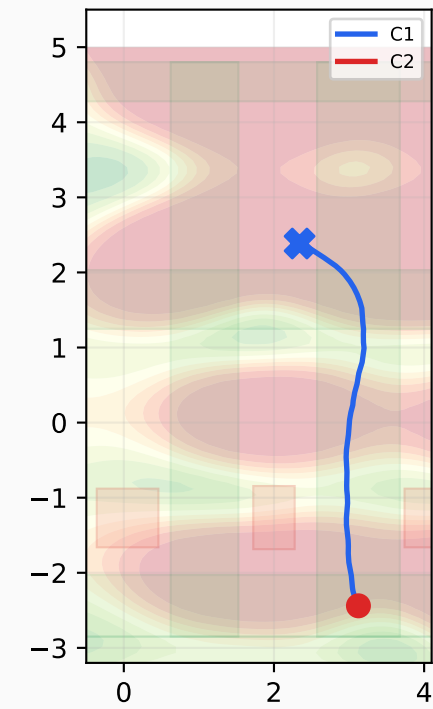


C1 — position/yaw error

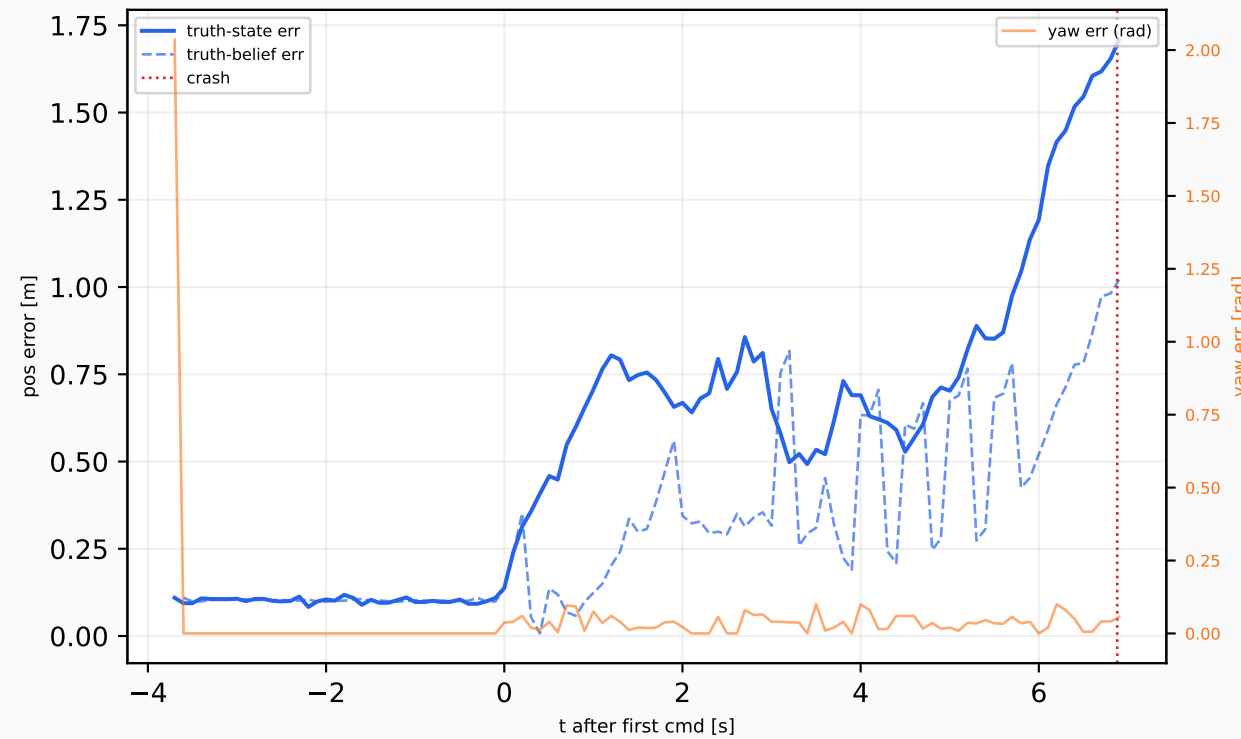


Safety: obstacle & wall clearance (both conditions)

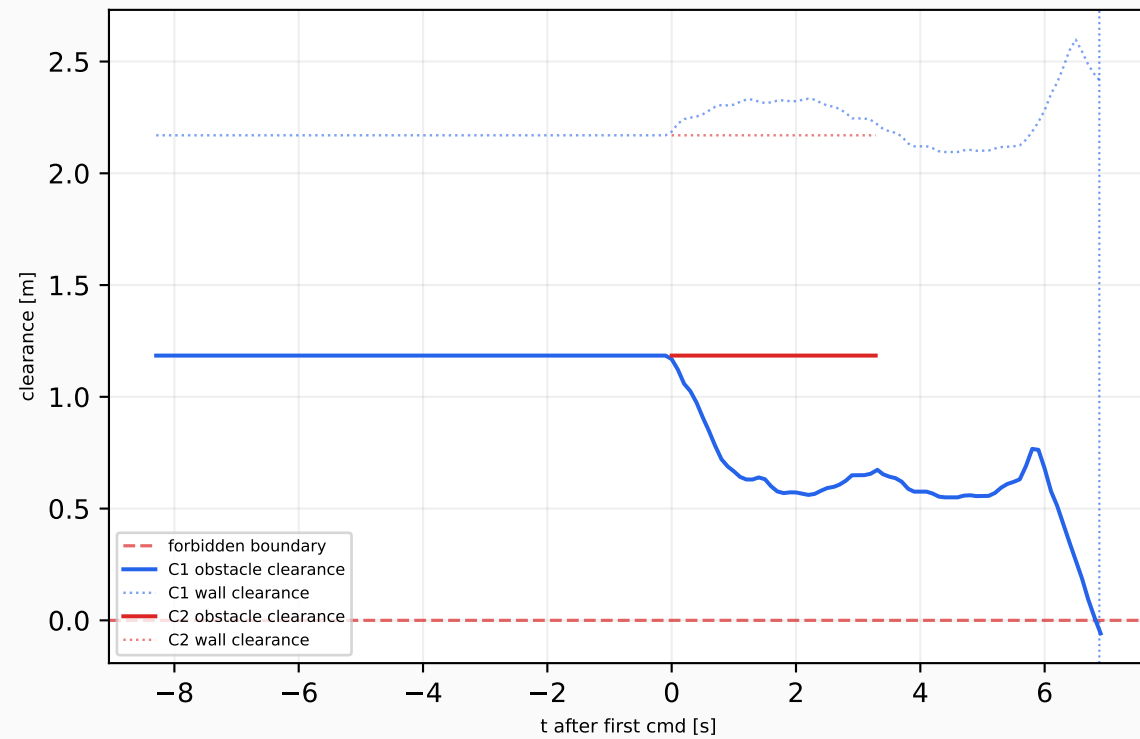


Local solve time distribution

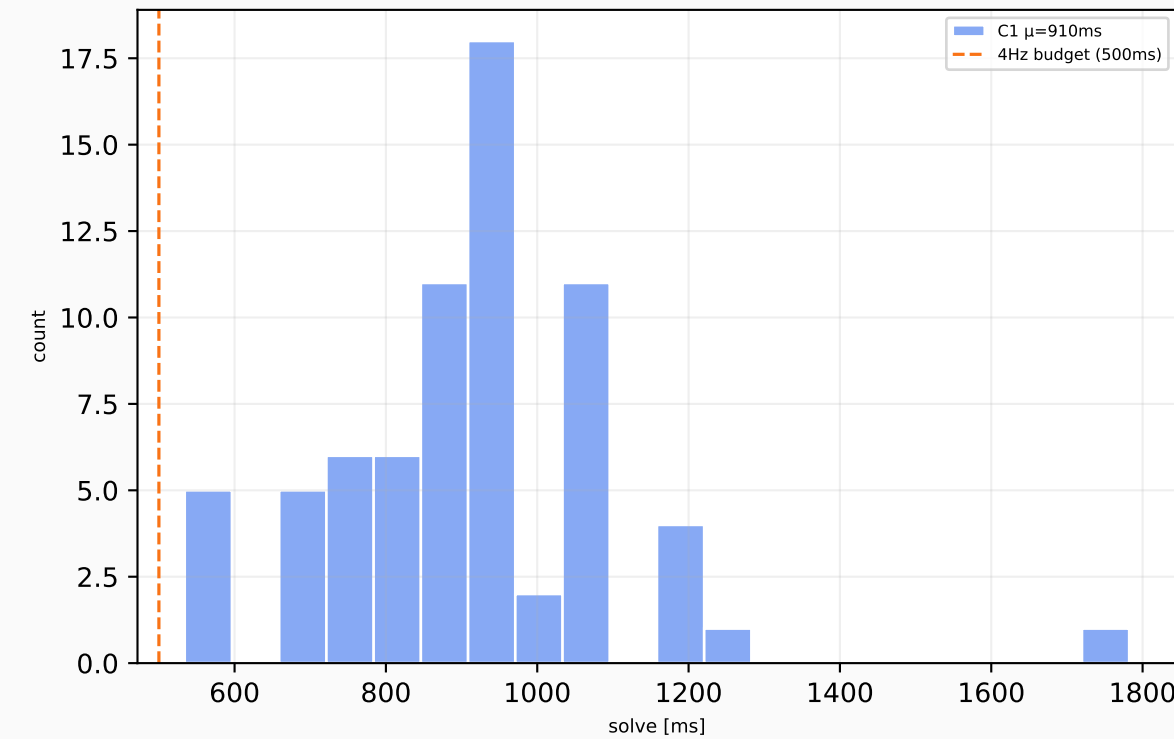


C1 — EFE cost decomposition

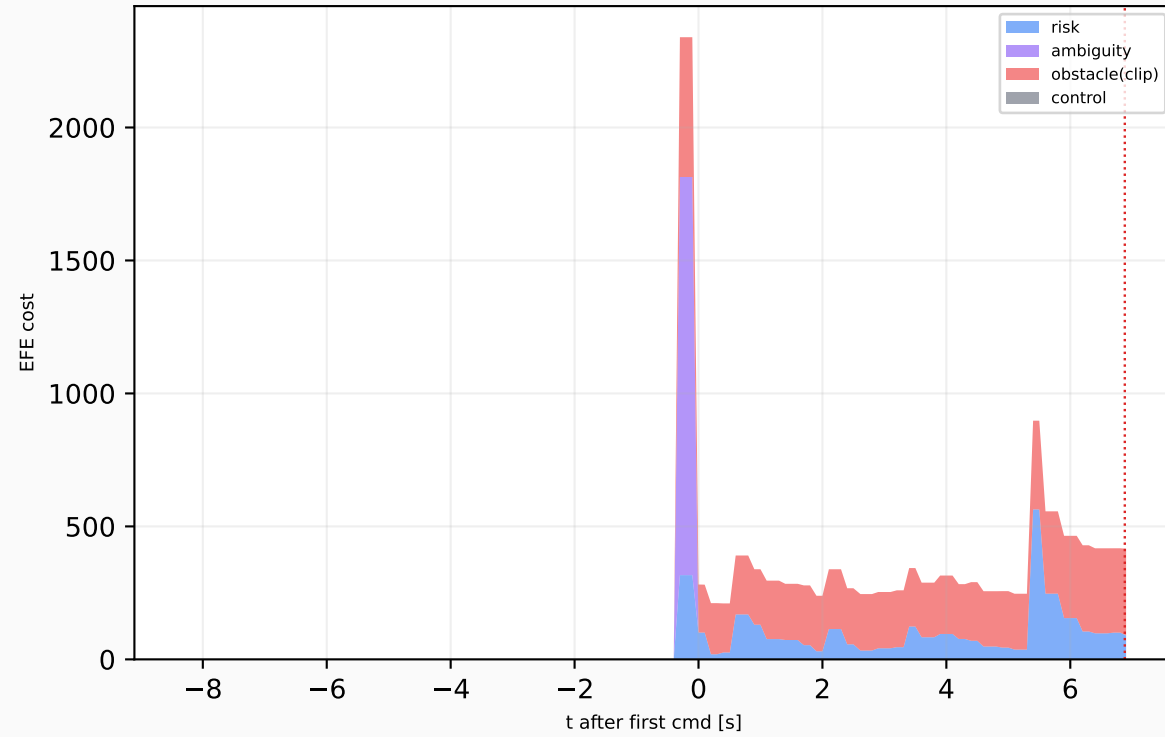


C2 — EFE cost decomposition

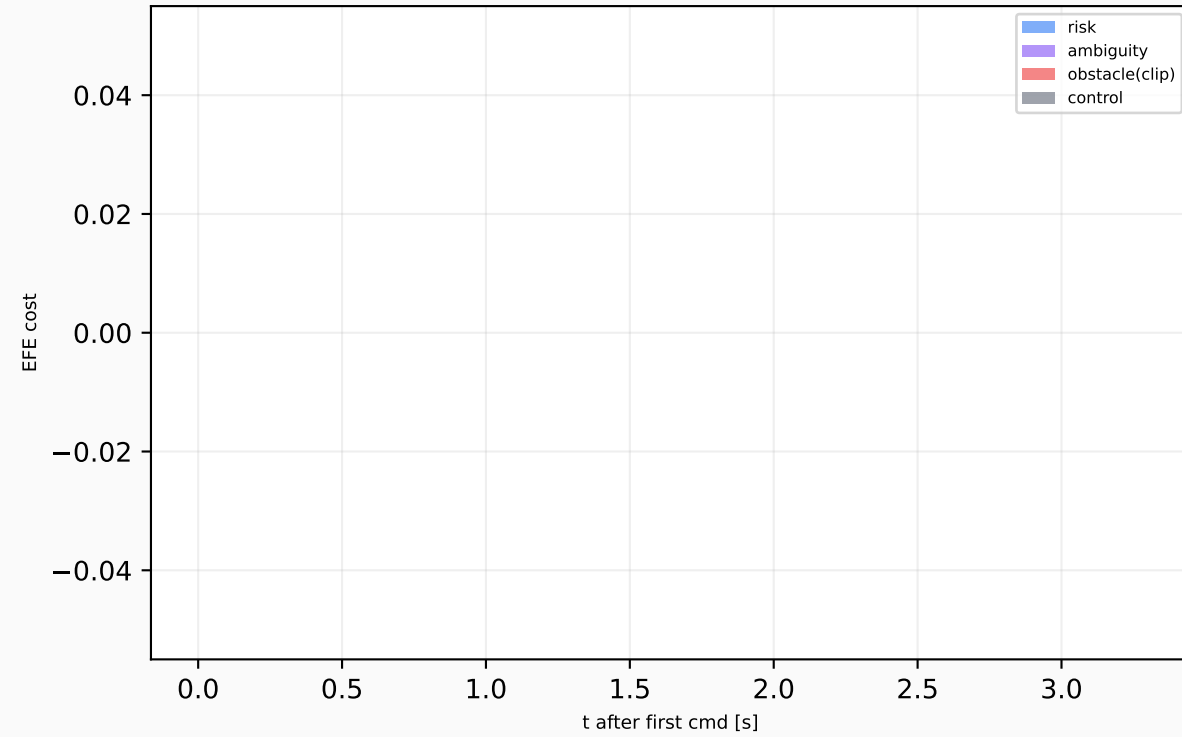


Local solve time over run

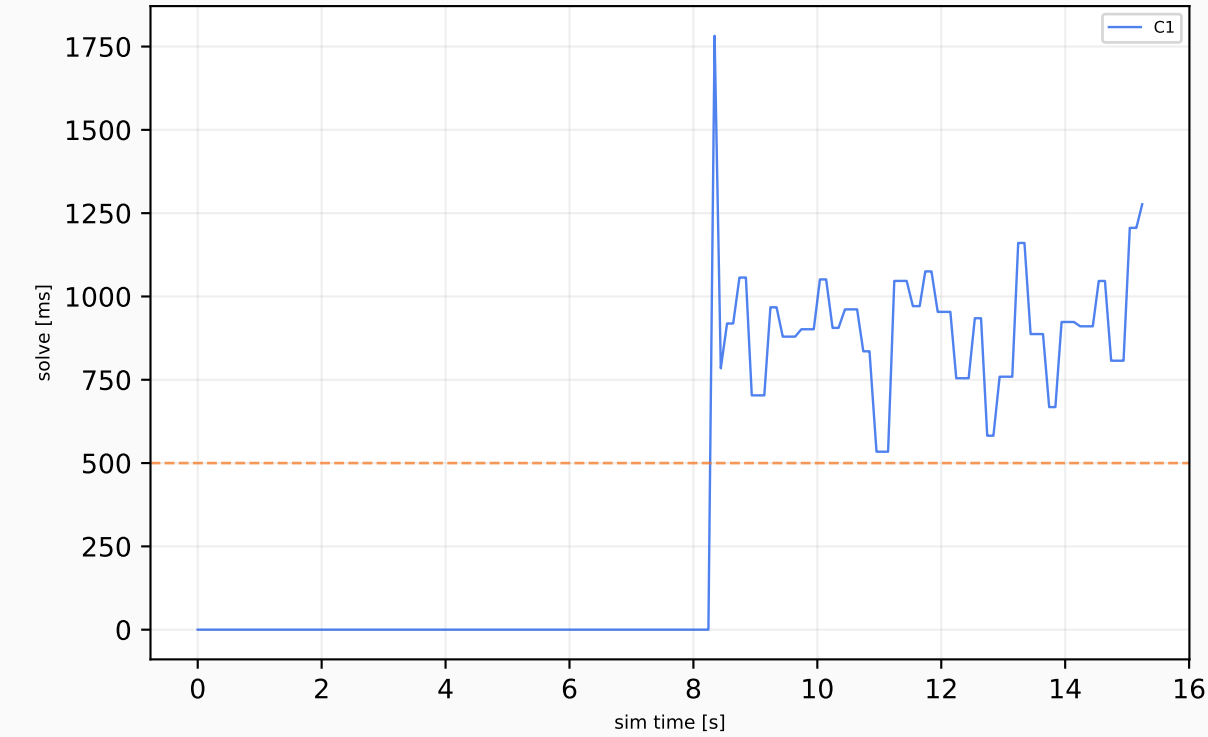

Belief covariance trace + p\_vis\_plan

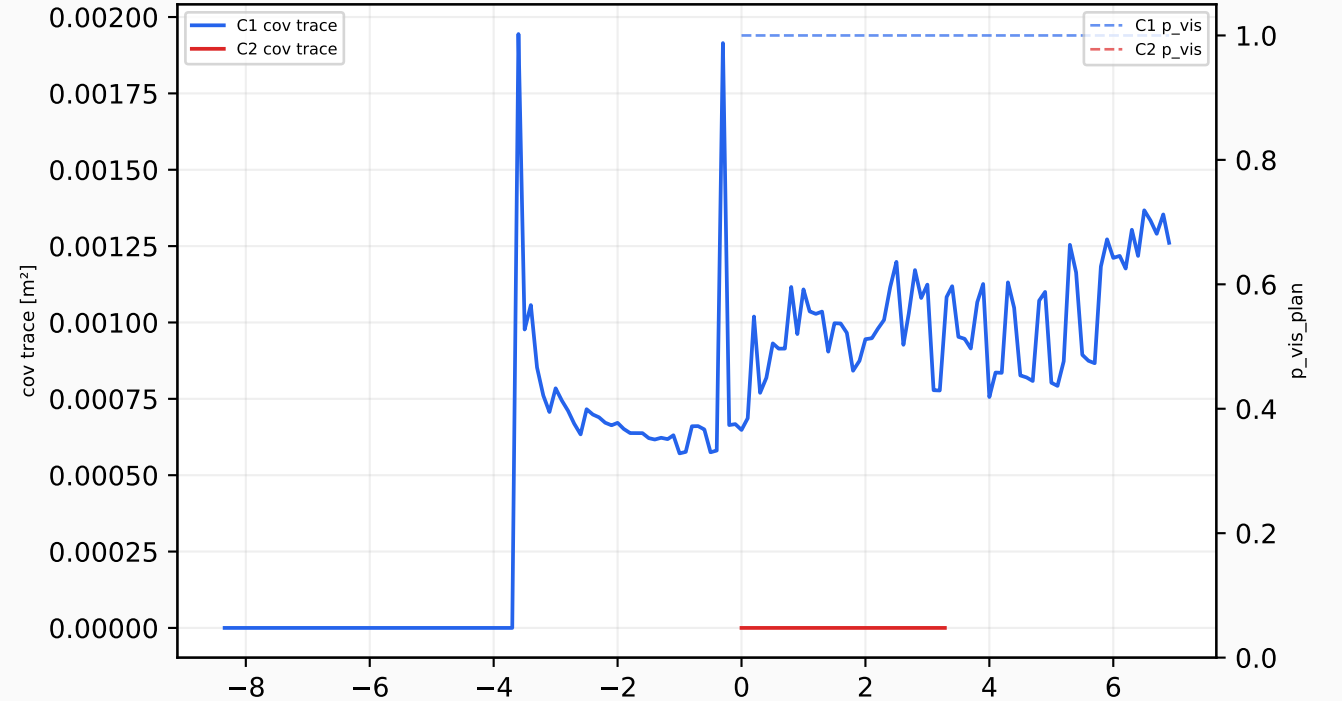

cmd\_v + noise envelope + rollout validity

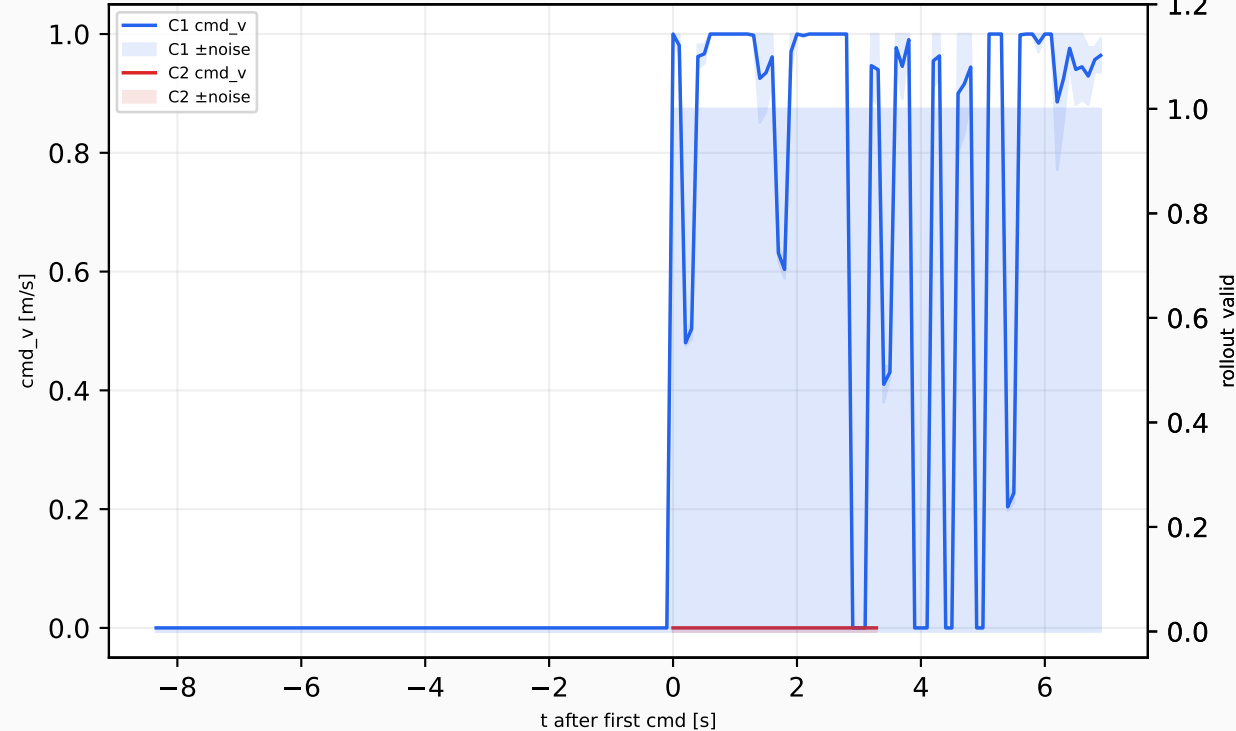

C2 — position/yaw error

