



REVISIONS			
REV	DESCRIPTION	DATE	APPR
A	INITIAL RELEASE	2025-11-17	P
B	ADDED DOWEL BORES. FINISH WAS CLEAR ANODIZE	2026-09-02	P




TOP VIEW

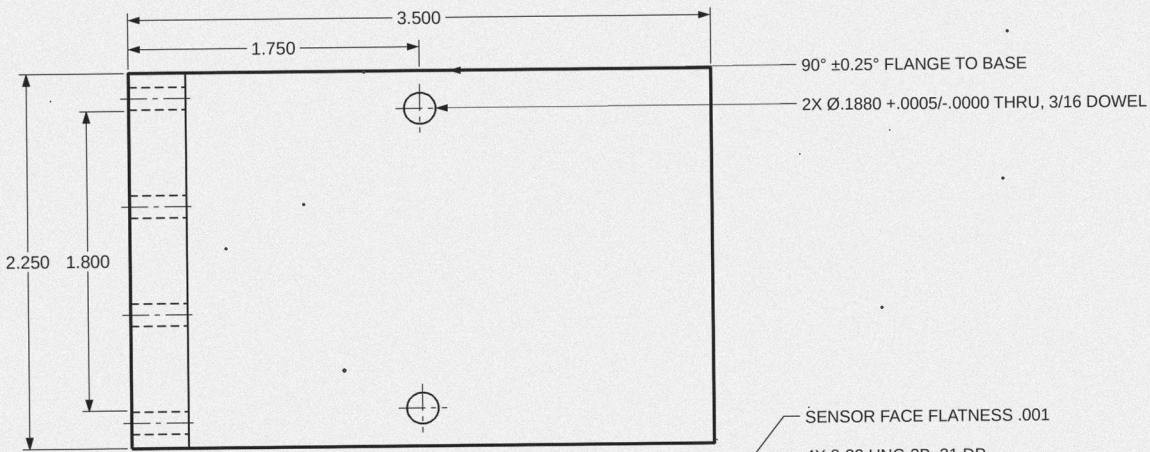

FRONT VIEW

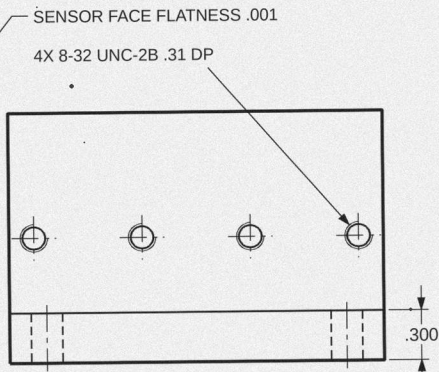

RIGHT SIDE VIEW

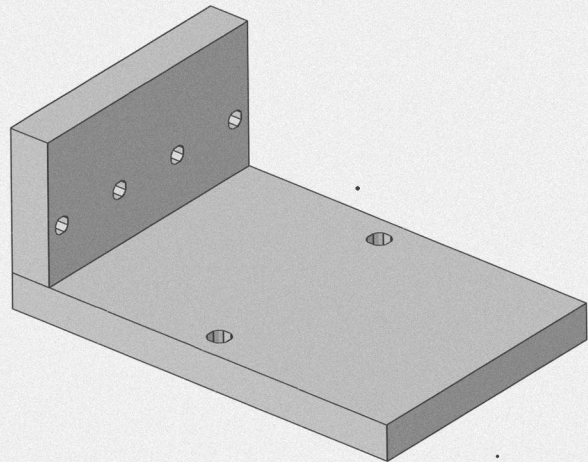


ISOMETRIC VIEW

NOTES:

1. INTERPRET DRAWING PER ASME Y14.5-2018.
2. REMOVE ALL BURRS. BREAK SHARP EDGES .005-.015 UNLESS NOTED.
3. SURFACE FINISH 63 Ra MAX. SENSOR MOUNTING FACE 32 Ra MAX.
4. MASK DOWEL BORES AND TAPPED HOLES DURING ANODIZE. DIMENSIONS APPLY AFTER FINISH.
5. PART MARK P/N AND REV PER MIL-STD-130 WITH WHITE EPOXY INK, .09 HIGH CHARACTERS, LOCATION SHOWN.
6. FIRST ARTICLE INSPECTION REPORT PER AS9102 REQUIRED ON FIRST PRODUCTION LOT.

PROPRIETARY AND CONFIDENTIAL. THE INFORMATION IN THIS DOCUMENT IS THE PROPERTY OF QUILLON AEROSPACE. DO NOT REPRODUCE IT OR USE IT FOR ANY PURPOSE OTHER THAN QUOTING OR MAKING PARTS FOR QUILLON AEROSPACE WITHOUT WRITTEN PERMISSION.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
TOLERANCES:
.XX ±.01
.XXX ±.005
.XXXX ±.0005
ANGLES ±0.5°
INTERPRET PER ASME Y14.5-2018
BREAK SHARP EDGES
DO NOT SCALE DRAWING



QUILLON AEROSPACE

TITLE BRACKET, SENSOR MOUNTING			
MATERIAL ALUMINUM 6061-T6 PER AMS-QQ-A-250/11			
FINISH BLACK ANODIZE PER MIL-A-8625 TYPE II CLASS 2			
SIZE A	DWG NO. QA-41127	REV B	
DRAWN A. PINEDA	DATE 2026-09-02	SCALE 2:1	SHEET 1 OF 1