



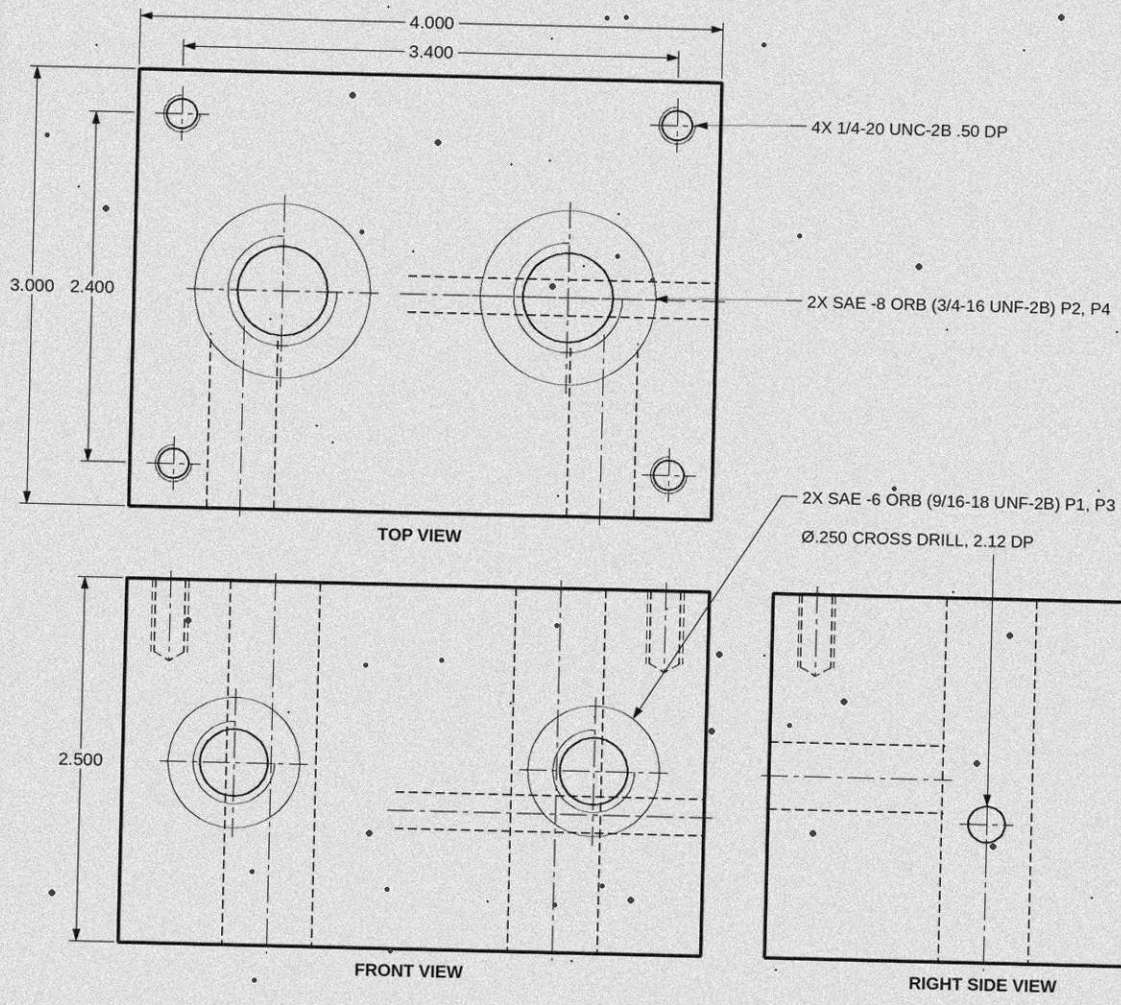

REVISIONS			
REV	DESCRIPTION	DATE	APPR
A	INITIAL RELEASE	2025-06-10	H
B	ADDED 4X 1/4-20 MOUNTING HOLES	2025-11-03	H
C	P1, P3 WERE SAE -4, NOW SAE -6	2026-03-19	H
D	MOVED P2, P4. BOTTOM FACE TOL ±.002 TO ±.005	2026-09-22	H

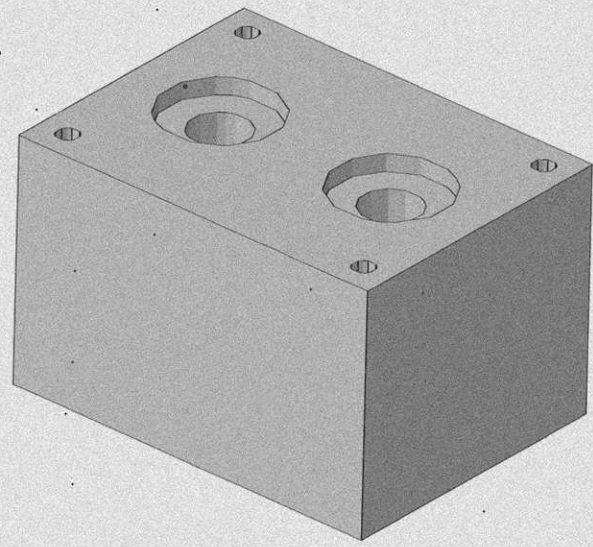


ISOMETRIC VIEW

- NOTES:**
1. INTERPRET DRAWING PER ASME Y14.5-2018.
 2. BOTTOM FACE IS DATUM A. HEIGHT FROM DATUM A ±.005 (REV D). FLATNESS .002.
 3. ALL PORTS PER SAE J1926-1. SPOTFACES FREE OF CHATTER AND RADIAL TOOL MARKS.
 4. CROSS-DRILLED PASSAGES FREE OF BURRS AND CHIPS AT ALL INTERSECTIONS.
 5. SURFACE FINISH 63 Ra MAX UNLESS NOTED.
 6. HARD ANODIZE .0015-.0020 THK AFTER MACHINING. MASK ALL PORT THREADS.
 7. PART MARK P/N AND REV BY VIBRA-ETCH ON SIDE 2 BEFORE ANODIZE.
 8. CLEAN ALL PASSAGES AND CAP ALL PORTS FOR SHIPMENT.

PROPRIETARY AND CONFIDENTIAL. THE INFORMATION IN THIS DOCUMENT IS THE PROPERTY OF HALVORSEN PUMP & VALVE. DO NOT REPRODUCE IT OR USE IT FOR ANY PURPOSE OTHER THAN QUOTING OR MAKING PARTS FOR HALVORSEN PUMP & VALVE WITHOUT WRITTEN PERMISSION.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
TOLERANCES:
.XX ±.01
.XXX ±.005
ANGLES ±0.5°
INTERPRET PER ASME Y14.5-2018
BREAK SHARP EDGES
DO NOT SCALE DRAWING



THIRD ANGLE PROJECTION

HALVORSEN PUMP & VALVE			
TITLE			
MANIFOLD BLOCK, VALVE, 4-PORT			
MATERIAL			
ALUMINUM, 6061-T6511 PER ASTM B221			
FINISH			
HARD ANODIZE PER MIL-A-8625 TYPE III CLASS 1			
SIZE	DWG NO.		REV
A	HPV-2045		D
DRAWN	DATE	SCALE	SHEET
M. HOLT	2026-09-22	1:1	1 OF 1