



CUI

| REVISIONS |                 |            |      |
|-----------|-----------------|------------|------|
| REV       | DESCRIPTION     | DATE       | APPR |
| A         | INITIAL RELEASE | 2026-09-08 | L    |

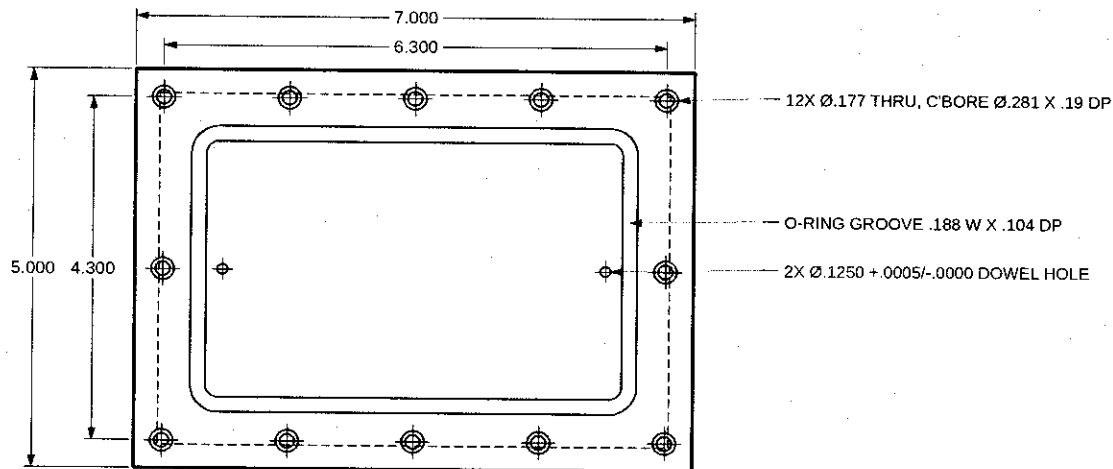


TOP VIEW



FRONT VIEW



RIGHT SIDE VIEW

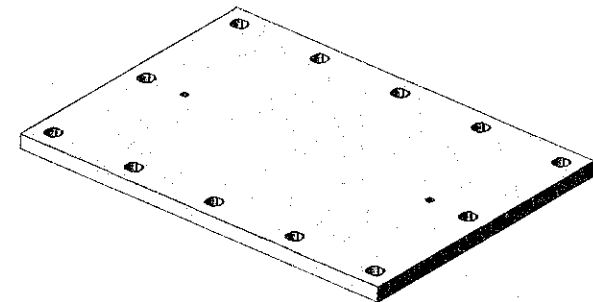

ISOMETRIC VIEW


## CUI DESIGNATION INDICATOR

CUI, CONTROLLED BY: ASHGROVE INSTRUMENTS. CUI CATEGORY: CTI (CONTROLLED TECHNICAL INFORMATION). DISTRIBUTION STATEMENT D: DISTRIBUTION AUTHORIZED TO THE DEPARTMENT OF DEFENSE AND U.S. DOD CONTRACTORS ONLY. HANDLE PER DFARS 252.204-7012 AND NIST SP 800-171. POC: A. LINDGREN.

UNLESS OTHERWISE SPECIFIED:  
DIMENSIONS ARE IN INCHES  
TOLERANCES:

.XX ±.01  
.XXX ±.005  
ANGLES ±0.5°

INTERPRET PER ASME Y14.5-2018  
BREAK SHARP EDGES  
DO NOT SCALE DRAWING



THIRD ANGLE PROJECTION

## ASHGROVE INSTRUMENTS

TITLE

COVER PLATE, SENSOR ENCLOSURE

MATERIAL

STAINLESS STEEL 316L PER ASTM A240, ANNEALED

FINISH

PASSIVATE PER ASTM A967 NITRIC 2

SIZE

A

DWG NO.

AGI-3052

REV

A

DRAWN

A. LINDGREN

DATE

2026-09-08

SCALE

1:1

SHEET

1 OF 1

## NOTES:

1. INTERPRET DRAWING PER ASME Y14.5-2018.
2. SEALING FACE -A- FLAT WITHIN .002, 32 Ra MAX. NO RADIAL TOOL MARKS ACROSS O-RING GROOVE.
3. ELECTRO-ETCH P/N AND REV ON NON-SEALING FACE, .09 HIGH CHARACTERS.
4. GROOVE FOR .139 C/S O-RING, DETAIL B.
5. SURFACE FINISH 63 Ra MAX U.O.S.
6. BREAK SHARP EDGES .005-.015.
7. PASSIVATE AFTER ALL MACHINING.
8. BAG EACH PART. PROTECT FACE -A-.

CUI