


REVISIONS			
REV	DESCRIPTION	DATE	APPR
A	INITIAL RELEASE	2025-11-17	TW
B	ADDED DOWEL BORES. FINISH WAS CLEAR ANODIZE	2026-09-02	TW




TOP VIEW

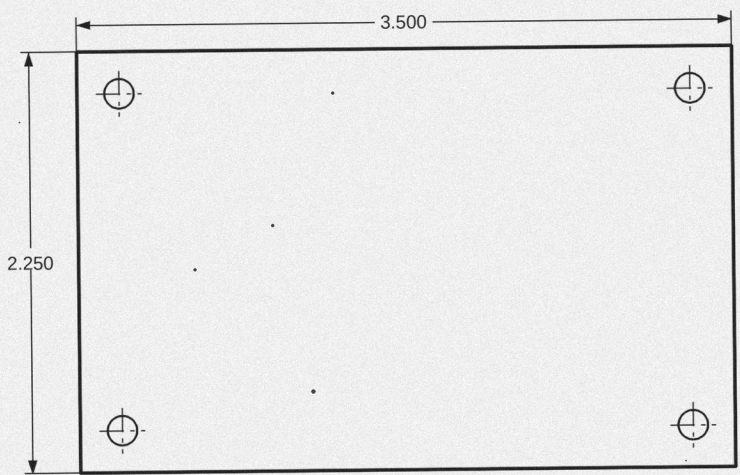

FRONT VIEW

- 2X Ø.1880 +.0005/-.0000 THRU, 3/16 DOWEL
- 4X 8-32 UNC-2B .31 DP
- SENSOR FACE FLATNESS .001
- 90° ±0.25° FLANGE TO BASE

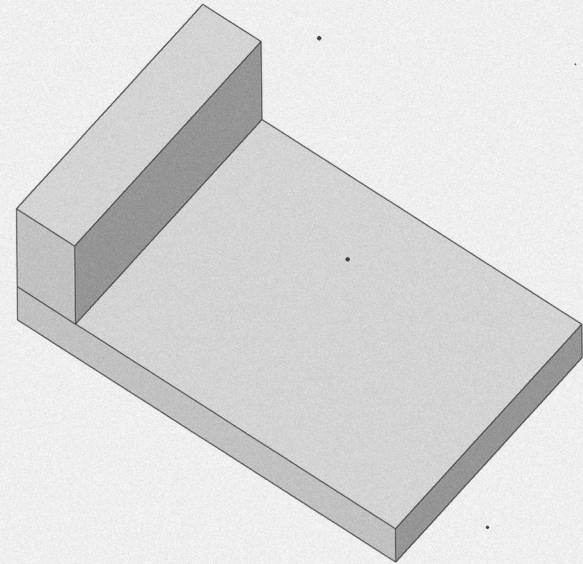

ISOMETRIC VIEW

NOTES:

- INTERPRET DRAWING PER ASME Y14.5-2018.
- REMOVE ALL BURRS. BREAK SHARP EDGES .005-.015 UNLESS NOTED.
- SURFACE FINISH 63 Ra MAX. SENSOR MOUNTING FACE 32 Ra MAX.
- MASK DOWEL BORES AND TAPPED HOLES DURING ANODIZE. DIMENSIONS APPLY AFTER FINISH.
- PART MARK P/N AND REV PER MIL-STD-130 WITH WHITE EPOXY INK, .09 HIGH CHARACTERS, LOCATION SHOWN.
- FIRST ARTICLE INSPECTION REPORT PER AS9102 REQUIRED ON FIRST PRODUCTION LOT.

PROPRIETARY AND CONFIDENTIAL. THE INFORMATION IN THIS DOCUMENT IS THE PROPERTY OF QUILLON AEROSPACE. DO NOT REPRODUCE IT OR USE IT FOR ANY PURPOSE OTHER THAN QUOTING OR MAKING PARTS FOR QUILLON AEROSPACE WITHOUT WRITTEN PERMISSION.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
TOLERANCES:
.XX ±.01
.XXX ±.005
.XXXX ±.0005
ANGLES ±0.5°
INTERPRET PER ASME Y14.5-2018
BREAK SHARP EDGES
DO NOT SCALE DRAWING



THIRD ANGLE PROJECTION

QUILLON AEROSPACE			
TITLE			
BRACKET, SENSOR MOUNTING			
MATERIAL			
ALUMINUM 6061-T6 PER AMS-QQ-A-250/11			
FINISH			
BLACK ANODIZE PER MIL-A-8625 TYPE II CLASS 2			
SIZE	DWG NO.		REV
A	QA-41127		B
DRAWN	DATE	SCALE	SHEET
A. PINEDA	2026-09-02	2:1	1 OF 1