



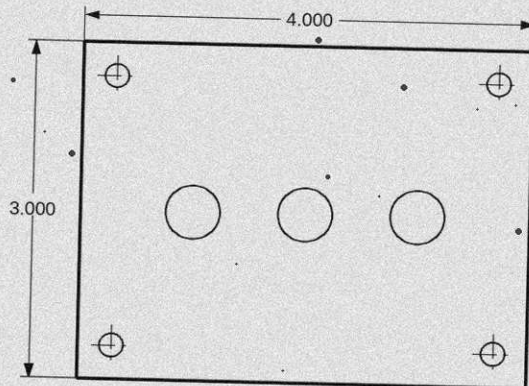


TOP VIEW

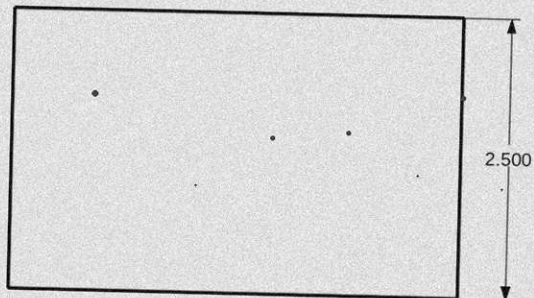

FRONT VIEW

- 2X SAE -8 ORB (3/4-16 UNF-2B) P2, P4
- 2X SAE -6 ORB (9/16-18 UNF-2B) P1, P3
- 4X 1/4-20 UNC-2B .50 DP
- Ø.250 CROSS DRILL, 2.12 DP

REVISIONS			
REV	DESCRIPTION	DATE	APPR
A	INITIAL RELEASE	2025-06-10	TW
B	ADDED 4X 1/4-20 MOUNTING HOLES	2025-11-03	TW
C	P1, P3 WERE SAE -4, NOW SAE -6	2026-03-19	TW
D	MOVED P2, P4. BOTTOM FACE TOL ±.002 TO ±.005	2026-09-22	TW

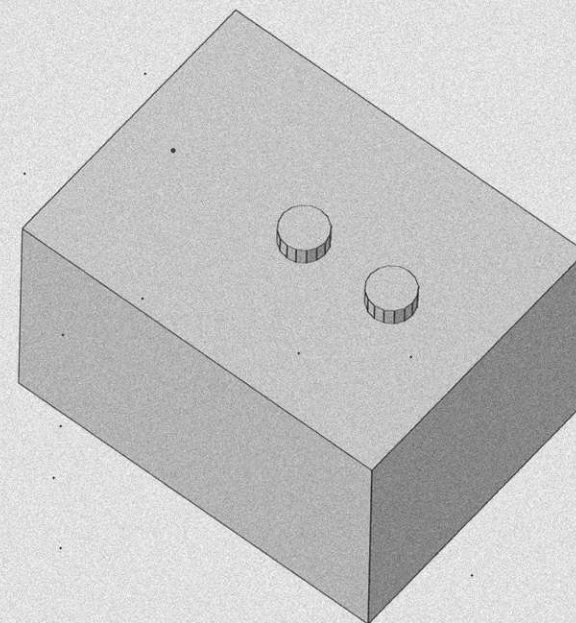

ISOMETRIC VIEW

NOTES:

- INTERPRET DRAWING PER ASME Y14.5-2018.
- BOTTOM FACE IS DATUM A. HEIGHT FROM DATUM A ±.005 (REV D). FLATNESS .002.
- ALL PORTS PER SAE J1926-1. SPOTFACES FREE OF CHATTER AND RADIAL TOOL MARKS.
- CROSS-DRILLED PASSAGES FREE OF BURRS AND CHIPS AT ALL INTERSECTIONS.
- SURFACE FINISH 63 Ra MAX UNLESS NOTED.
- HARD ANODIZE .0015-.0020 THK AFTER MACHINING. MASK ALL PORT THREADS.
- PART MARK P/N AND REV BY VIBRA-ETCH ON SIDE 2 BEFORE ANODIZE.
- CLEAN ALL PASSAGES AND CAP ALL PORTS FOR SHIPMENT.

PROPRIETARY AND CONFIDENTIAL. THE INFORMATION IN THIS DOCUMENT IS THE PROPERTY OF HALVORSEN PUMP & VALVE. DO NOT REPRODUCE IT OR USE IT FOR ANY PURPOSE OTHER THAN QUOTING OR MAKING PARTS FOR HALVORSEN PUMP & VALVE WITHOUT WRITTEN PERMISSION.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
TOLERANCES:

.XX ±.01
.XXX ±.005
ANGLES ±0.5°

INTERPRET PER ASME Y14.5-2018
BREAK SHARP EDGES
DO NOT SCALE DRAWING



THIRD ANGLE PROJECTION

HALVORSEN PUMP & VALVE

TITLE

MANIFOLD BLOCK, VALVE, 4-PORT

MATERIAL

ALUMINUM 6061-T6511 PER ASTM B221

FINISH

HARD ANODIZE PER MIL-A-8625 TYPE III CLASS 1

SIZE

A HPV-2045

DWG NO.

DRAWN

M. HOLT

DATE

2026-09-22

SCALE

1:1

SHEET

1 OF 1

REV

D