


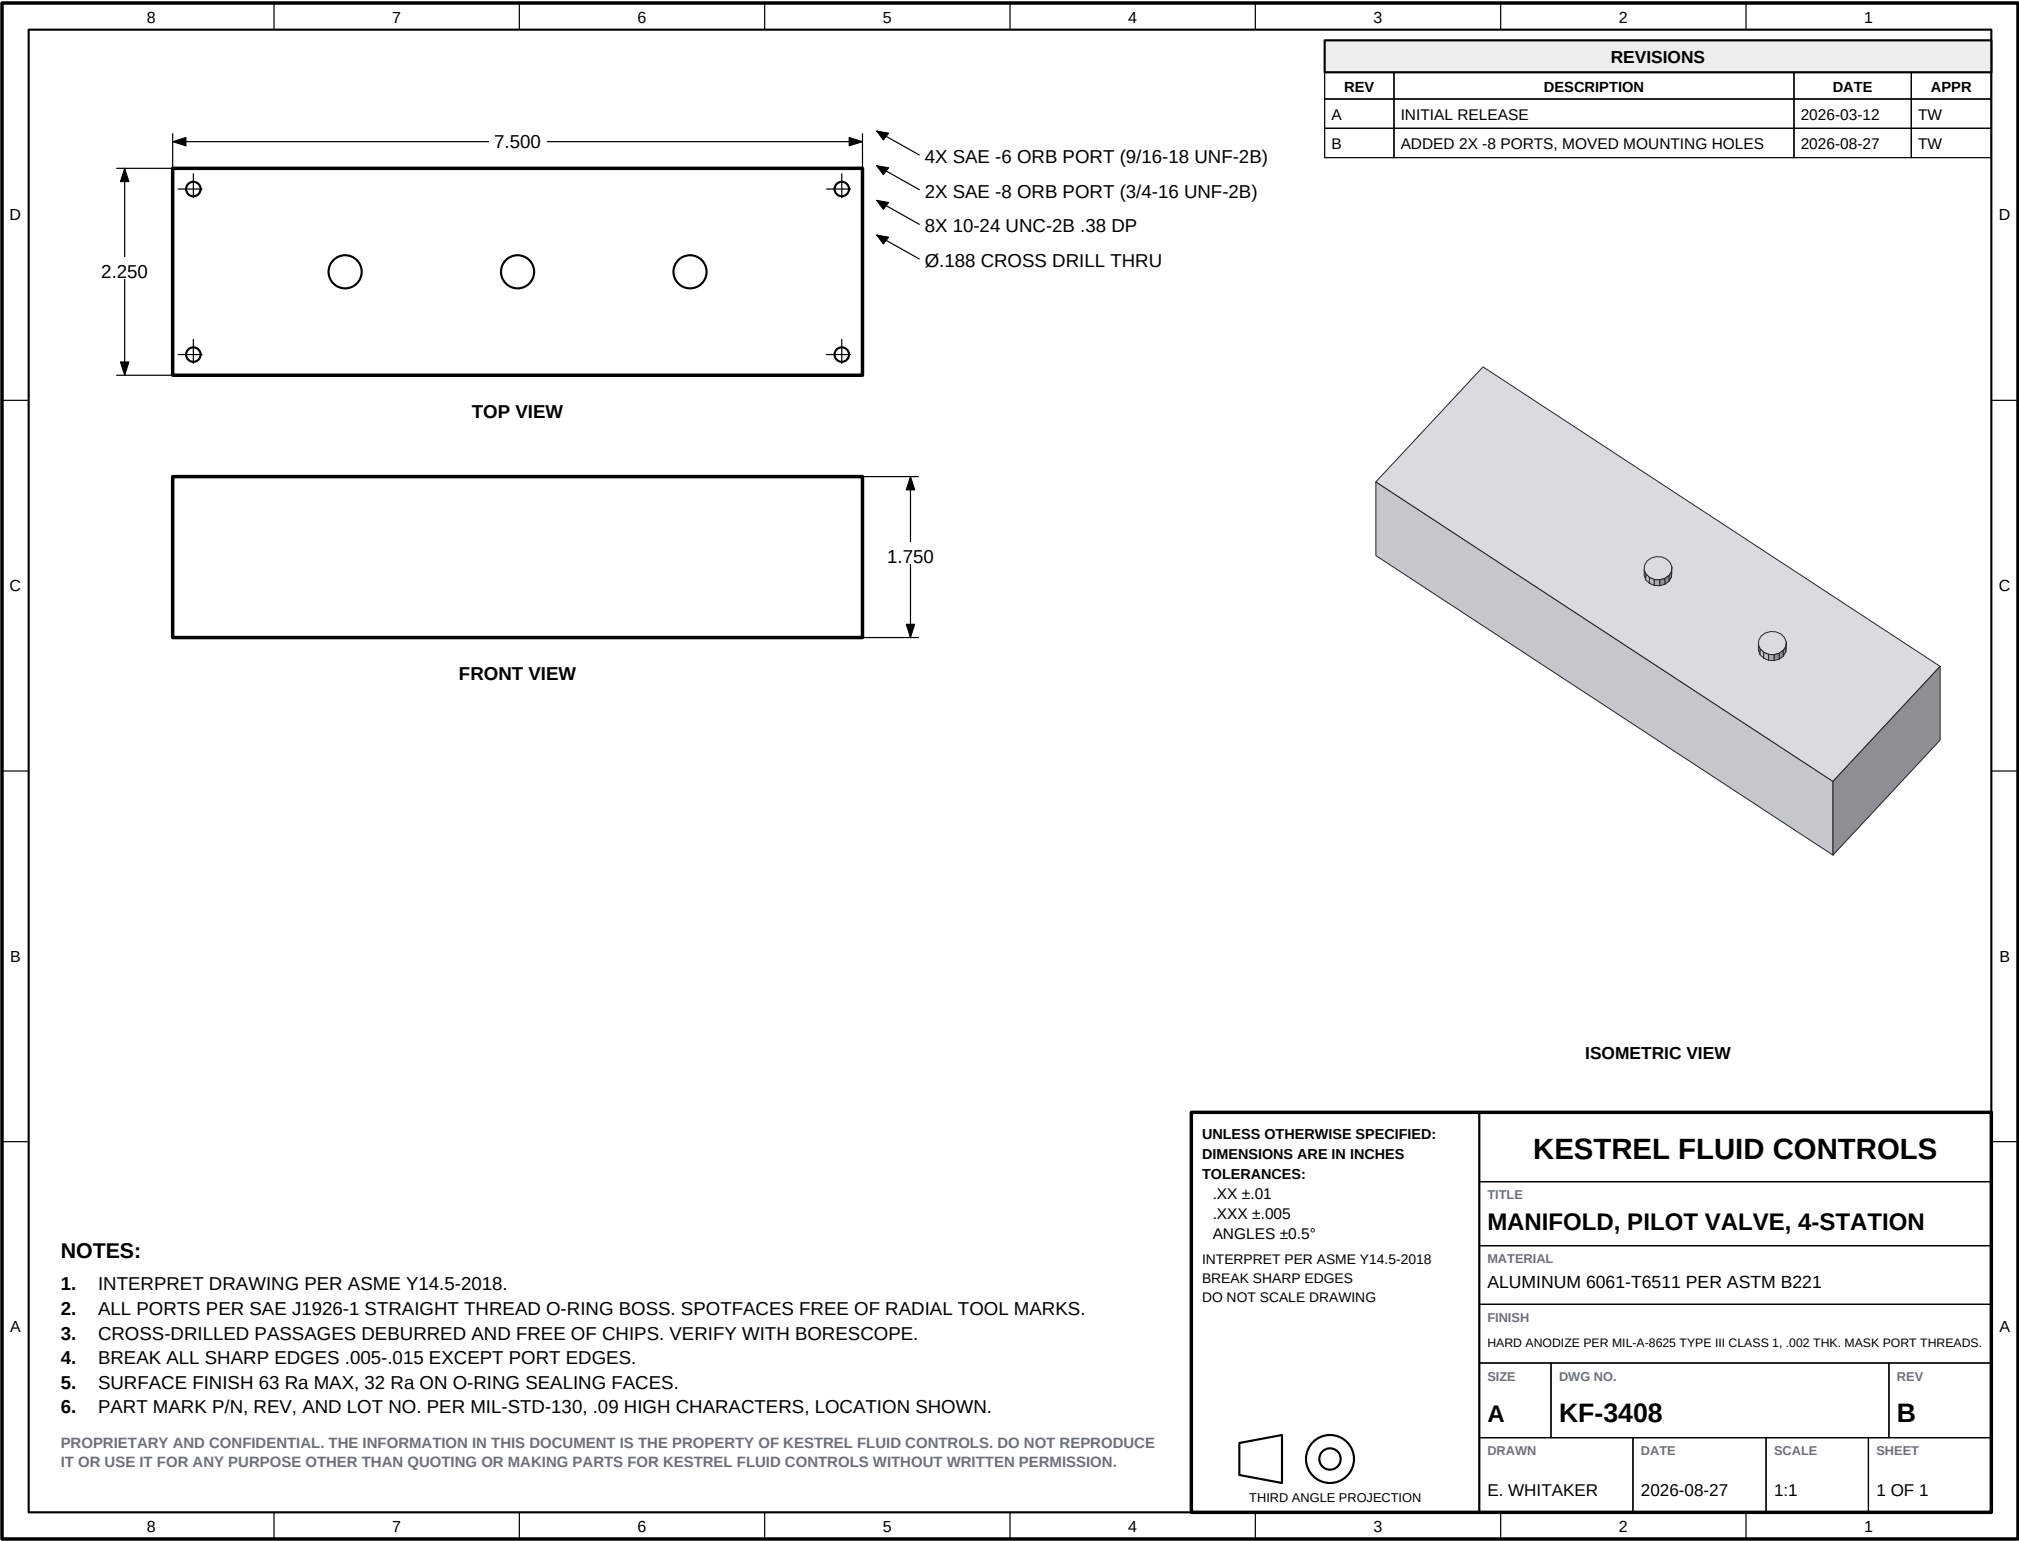

REVISIONS			
REV	DESCRIPTION	DATE	APPR
A	INITIAL RELEASE	2026-03-12	TW
B	ADDED 2X -8 PORTS, MOVED MOUNTING HOLES	2026-08-27	TW

- 4X SAE -6 ORB PORT (9/16-18 UNF-2B)
- 2X SAE -8 ORB PORT (3/4-16 UNF-2B)
- 8X 10-24 UNC-2B .38 DP
- Ø.188 CROSS DRILL THRU

TOP VIEW

FRONT VIEW

ISOMETRIC VIEW

- NOTES:**
- INTERPRET DRAWING PER ASME Y14.5-2018.
 - ALL PORTS PER SAE J1926-1 STRAIGHT THREAD O-RING BOSS. SPOTFACES FREE OF RADIAL TOOL MARKS.
 - CROSS-DRILLED PASSAGES DEBURRED AND FREE OF CHIPS. VERIFY WITH BORESCOPE.
 - BREAK ALL SHARP EDGES .005-.015 EXCEPT PORT EDGES.
 - SURFACE FINISH 63 Ra MAX, 32 Ra ON O-RING SEALING FACES.
 - PART MARK P/N, REV, AND LOT NO. PER MIL-STD-130, .09 HIGH CHARACTERS, LOCATION SHOWN.

PROPRIETARY AND CONFIDENTIAL. THE INFORMATION IN THIS DOCUMENT IS THE PROPERTY OF KESTREL FLUID CONTROLS. DO NOT REPRODUCE IT OR USE IT FOR ANY PURPOSE OTHER THAN QUOTING OR MAKING PARTS FOR KESTREL FLUID CONTROLS WITHOUT WRITTEN PERMISSION.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
TOLERANCES:
.XX ±.01
.XXX ±.005
ANGLES ±0.5°
INTERPRET PER ASME Y14.5-2018
BREAK SHARP EDGES
DO NOT SCALE DRAWING



THIRD ANGLE PROJECTION

KESTREL FLUID CONTROLS			
TITLE MANIFOLD, PILOT VALVE, 4-STATION			
MATERIAL ALUMINUM 6061-T6511 PER ASTM B221			
FINISH HARD ANODIZE PER MIL-A-8625 TYPE III CLASS 1, .002 THK. MASK PORT THREADS.			
SIZE A	DWG NO. KF-3408	REV B	
DRAWN E. WHITAKER	DATE 2026-08-27	SCALE 1:1	SHEET 1 OF 1