



CUI

REVISIONS			
REV	DESCRIPTION	DATE	APPR
A	INITIAL RELEASE	2026-09-08	TW

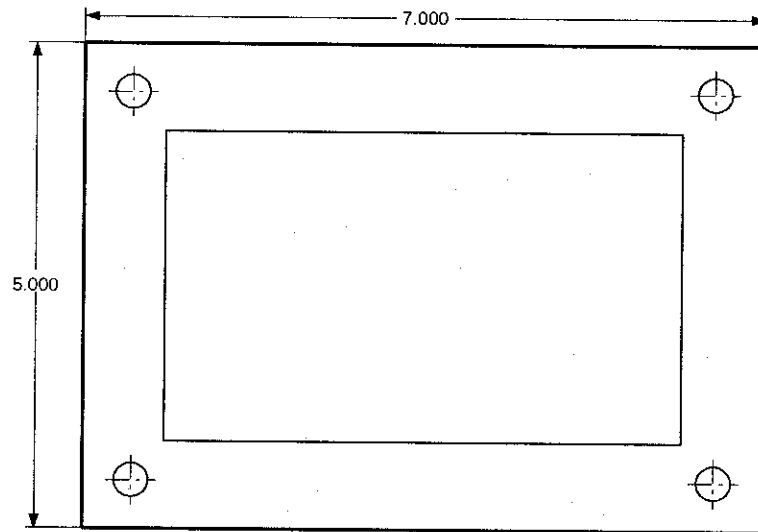


TOP VIEW



FRONT VIEW

- 12X Ø.177 THRU, C'BORE Ø.281 X .19 DP
- O-RING GROOVE .188 W X .104 DP
- 2X Ø.1250 +.0005/-.0000 DOWEL HOLE

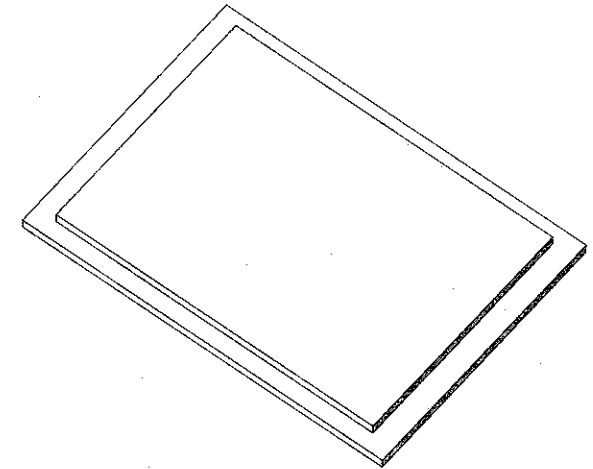

ISOMETRIC VIEW

NOTES:

1. INTERPRET DRAWING PER ASME Y14.5-2018.
2. SEALING FACE -A- FLAT WITHIN .002, 32 Ra MAX. NO RADIAL TOOL MARKS ACROSS O-RING GROOVE.
3. ELECTRO-ETCH P/N AND REV ON NON-SEALING FACE, .09 HIGH CHARACTERS.
4. GROOVE FOR .139 C/S O-RING, DETAIL B.
5. SURFACE FINISH 63 Ra MAX U.O.S.
6. BREAK SHARP EDGES .005-.015.
7. PASSIVATE AFTER ALL MACHINING.
8. BAG EACH PART. PROTECT FACE -A-.

CUI. CONTROLLED BY: ASHGROVE INSTRUMENTS. CUI CATEGORY:
CTI (CONTROLLED TECHNICAL INFORMATION). DISTRIBUTION
STATEMENT D: DISTRIBUTION AUTHORIZED TO THE DEPARTMENT OF
DEFENSE AND U.S. DOD CONTRACTORS ONLY. HANDLE PER DFARS
252.204-7012 AND NIST SP 800-171. POC: A. LINDGREN.

CUI

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
TOLERANCES:

.XX ±.01
.XXX ±.005
ANGLES ±0.5°

INTERPRET PER ASME Y14.5-2018
BREAK SHARP EDGES
DO NOT SCALE DRAWING



THIRD ANGLE PROJECTION

ASHGROVE INSTRUMENTS

TITLE

COVER PLATE, SENSOR ENCLOSURE

MATERIAL

STAINLESS STEEL 316L PER ASTM A240, ANNEALED

FINISH

PASSIVATE PER ASTM A967 NITRIC 2

SIZE

A

DWG NO.

AGI-3052

REV

A

DRAWN

A. LINDGREN

DATE

2026-09-08

SCALE

1:1

SHEET

1 OF 1