


WARNING: THIS DOCUMENT CONTAINS TECHNICAL DATA WHOSE EXPORT IS RESTRICTED BY THE ARMS EXPORT CONTROL ACT (TITLE 22, U.S.C., SEC 2751, ET SEQ.) AND THE INTERNATIONAL TRAFFIC IN ARMS REGULATIONS (ITAR, 22 CFR 120-130). EXPORT, OR RELEASE TO A FOREIGN PERSON, WITHOUT AN APPROVED LICENSE OR EXEMPTION IS A VIOLATION OF U.S. LAW. U.S. PERSONS ONLY.


REVISIONS			
REV	DESCRIPTION	DATE	APPR
A	INITIAL RELEASE	2025-06-10	TW
B	ADDED 4X 10-32 UNF-2B .38 DP, EACH SIDE	2025-12-02	TW
C	CHANGED FINISH FROM CHEM FILM TO ELECTROLESS NICKEL	2026-08-18	TW



TOP VIEW

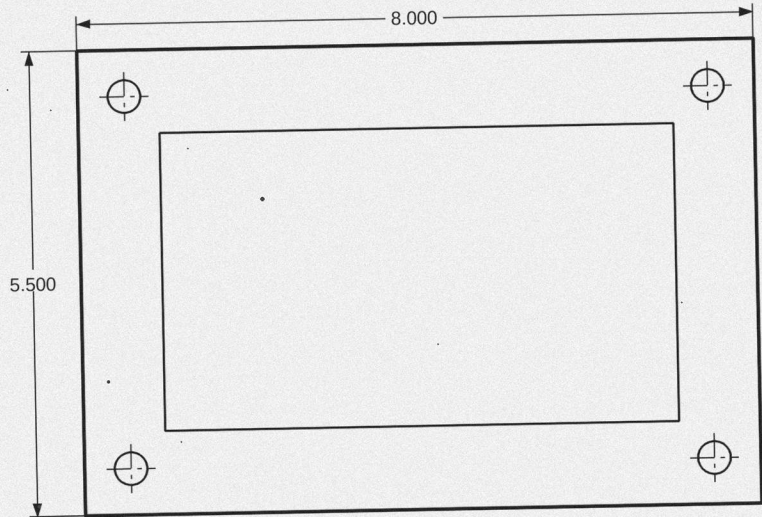

FRONT VIEW

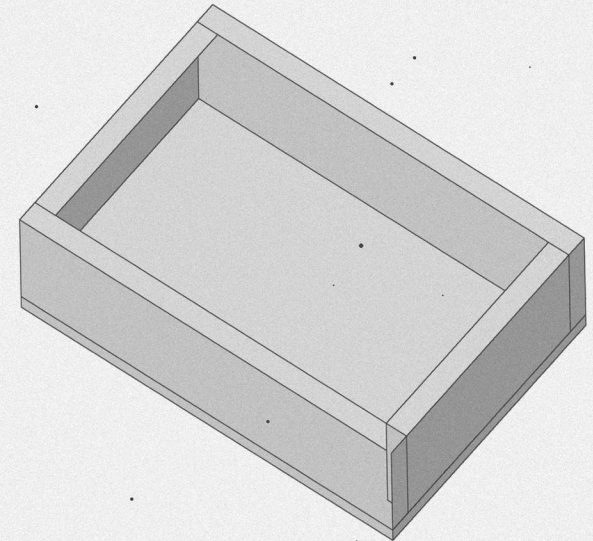

ISOMETRIC VIEW

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
TOLERANCES:
.XX ±.01
.XXX ±.005
ANGLES ±0.5°
INTERPRET PER ASME Y14.5-2018
BREAK SHARP EDGES
DO NOT SCALE DRAWING



THIRD ANGLE PROJECTION

CORVANE INDUSTRIES

TITLE
HOUSING, DRIVE ELECTRONICS

MATERIAL
ALUMINUM 6061-T6511 PER ASTM B221

FINISH
ELECTROLESS NICKEL PER AMS 2404 CLASS 1, .0003-.0005 THK

SIZE	DWG NO.	REV
A	CI-10442	C

DRAWN	DATE	SCALE	SHEET
L. PRUITT	2026-08-18	1:2	1 OF 1

NOTES:

- INTERPRET DRAWING PER ASME Y14.5-2018.
- INTERNAL CORNER RADII .125 MAX UNLESS OTHERWISE SPECIFIED.
- GASKET GROOVE 32 Ra MAX, FREE OF BURRS AND TOOL MARKS ACROSS GROOVE.
- BREAK ALL SHARP EDGES .005-.015.
- SURFACE FINISH 63 Ra MAX UNLESS OTHERWISE SPECIFIED.
- INSTALL MS21209 HELICAL COIL INSERTS PER NASM33537 AFTER PLATING, WHERE SHOWN.
- PART MARK P/N AND REV PER MIL-STD-130 WITH EPOXY INK, AREA SHOWN.