(ii) • Gently pull the mass down through a short distance. When released, the mass will oscillate.

• Take measurements to determine the period T_1 of the oscillations.

T_1 = ...

• Remove the mass from the double spring.

[2]

(b) • Using the shorter wooden rod, hang mass *m* as shown in Fig. 1.2.

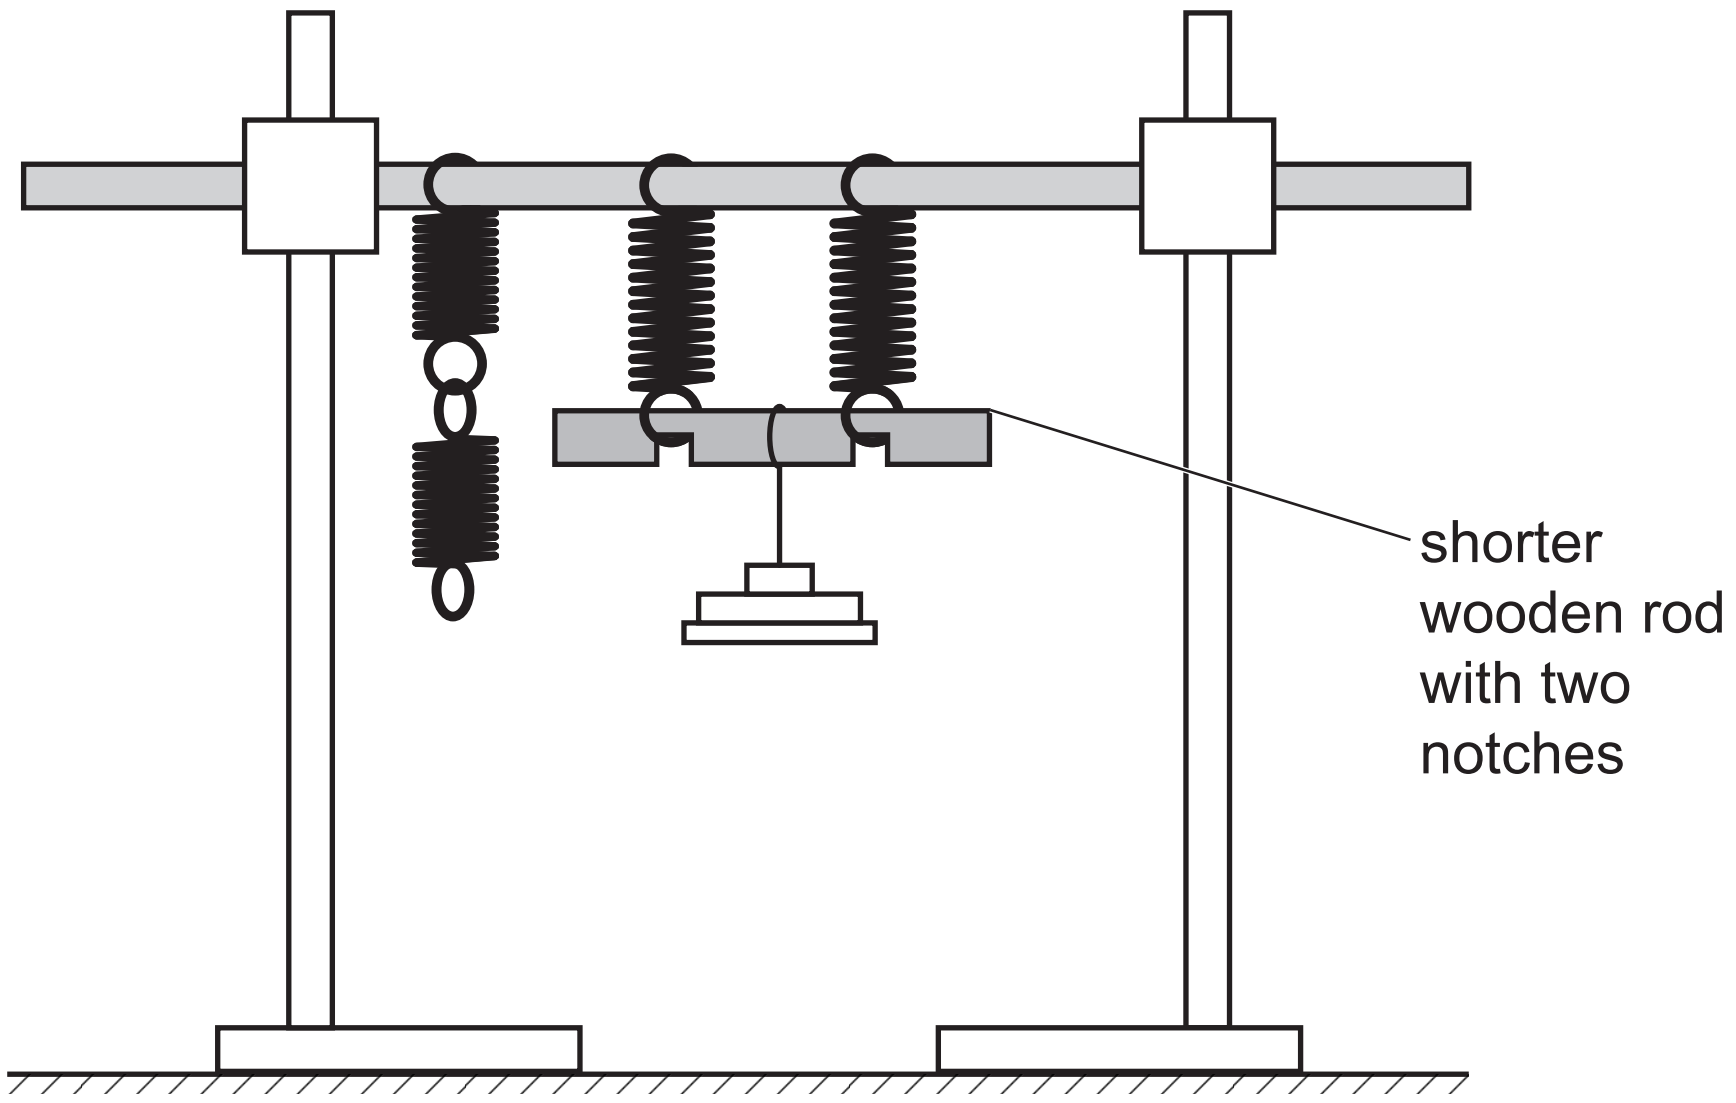

Fig. 1.2

• **Gently** place the hook of the mass hanger near the centre of the shorter rod.

• **Carefully** adjust the position of the mass hanger until the shorter rod is approximately parallel to the bench, as shown in Fig. 1.2.

• Gently pull the mass down through a short distance. When released, the mass will oscillate.

• Take measurements to determine the period T_2 of the oscillations.

T_2 = ...

• Remove the mass.

[1]