

BLOQUE A — UNIDAD DE CONTROL

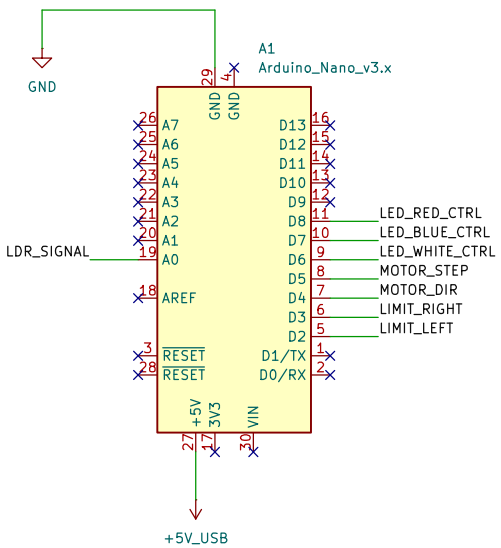


Arduino alimentado mediante USB-C (5V)

BLOQUE B — FINALES DE CARRERA




Switches Limites de Carrera
Izquierdo y Derecho

BLOQUE C — INDICADORES DE ESTADO

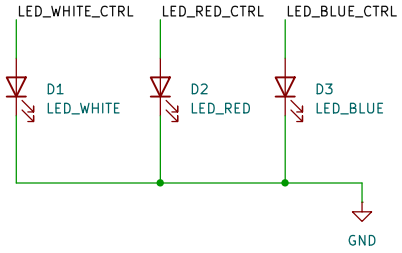


BLOQUE D — SENSOR LDR

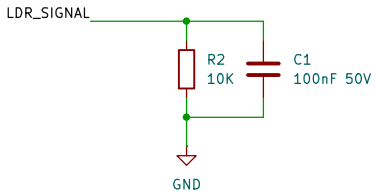


LDR1 IS AN EXTERNAL COMPONENT CONNECTED
BETWEEN J1.1 AND J1.2 THROUGH A TWO-WIRE CABLE

BLOQUE E — CONTROLADOR DE MOTOR

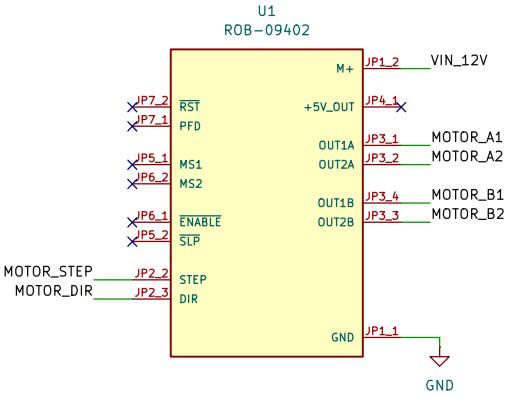

MICROSTEPPING MOTOR DRIVER
EasyDriver v4.4
A3967

BLOQUE F — INTERFAZ DEL MOTOR




WARNING:
DO NOT CONNECT OR DISCONNECT THE MOTOR
WHILE THE DRIVER IS POWERED


M1 IS EXTERNAL TO THE ASSEMBLY
CONNECTED THROUGH J4 AND J5

BLOQUE G — CONEXIONES EXTERNAS


SENSOR LDR




LÍMITES DE CARRERA




MOTOR STEPPER



ALIMENTACIÓN



BLOQUE H — ENTRADA Y PROTECCIÓN DE 12 V

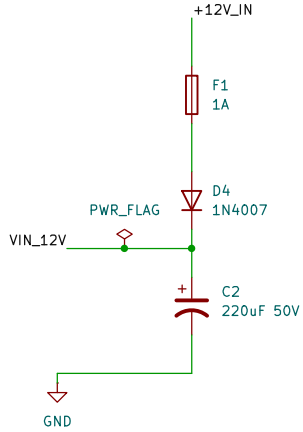

Designed by: Jose Vilchez

Faculty of Sciences
Universidad Nacional de Ingeniería

Sheet: /
File: ultimo-pcb.kicad_sch

Title: Automated Interference and Diffraction System

Size: A4	Date: 2026-07-08	**Rev: A**
KiCad E.D.A. 10.0.0		Id: 1/1