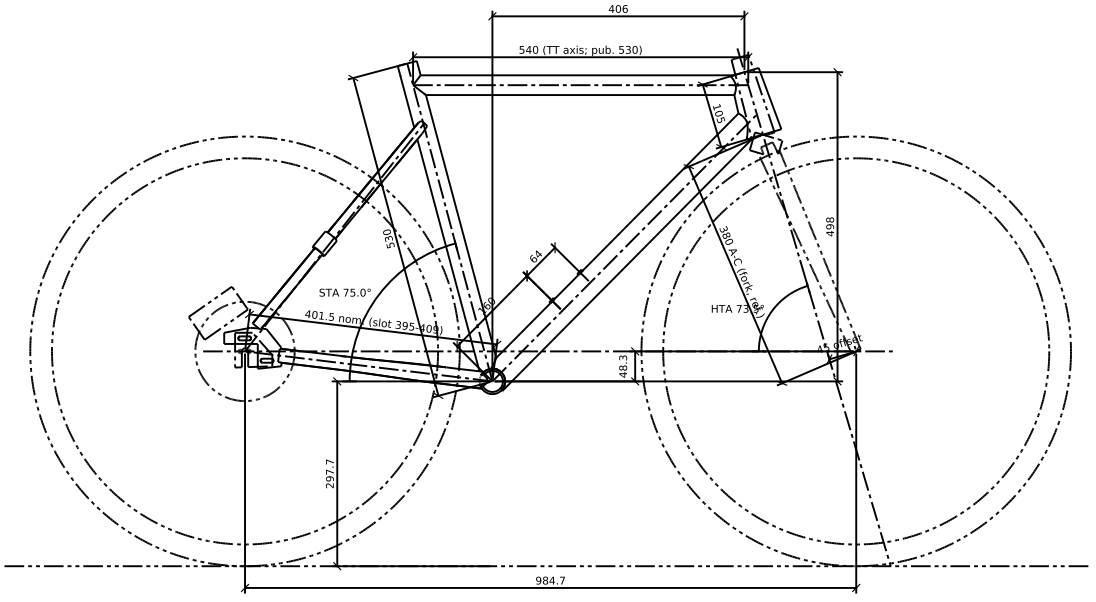


NOTES
1. Dimensions to tube centre lines; 700c (622) wheels, clearance for 35 mm tyres (min 4 mm gap all round, checked in 3D).
2. Fit geometry = published Hektor 53 (stack 498, reach 406, HTA 73.5, STA 75.0). Head tube 105 (pub. 120) for a 380/45 fork; BB drop 48.3 as Hektor.3. Horizontal TT measures 539 at stack height; published 530 is inconsistent with published stack/reach/STA (same 9-10 mm in all sizes).
4. Rear axle slot: chainstay 395-409 (min set by tyre/seat tube). 60T/22T + 115T belt sits at 401.5.
5. Trail 55.6 mm. Toe overlap approx. 28 mm (170 cranks) - expected with track geometry and large tyres.
6. Brakes: hydraulic disc. Rear post mount, 160 mm rotor (on the non-drive slider); front flat mount, 160 mm rotor on a 12 x 100 mm thru-axle fork.
7. Fork, wheels, sprockets, sliders, rotor and caliper are reference only (phantom). DXF is 1:1 - do not scale the PDF.

TITANIUM TRACK COMMUTER - SIZE 53 S
SIDE ELEVATION - FRAME GEOMETRY
Ti 3Al-2.5V / 6Al-4V PROJECTION: 1st angle
SHEET 1/2 SCALE 1:5 ON A3 UNITS mm / deg REV A