

PLAN VIEW FROM ABOVE (front to the right, drive side down)

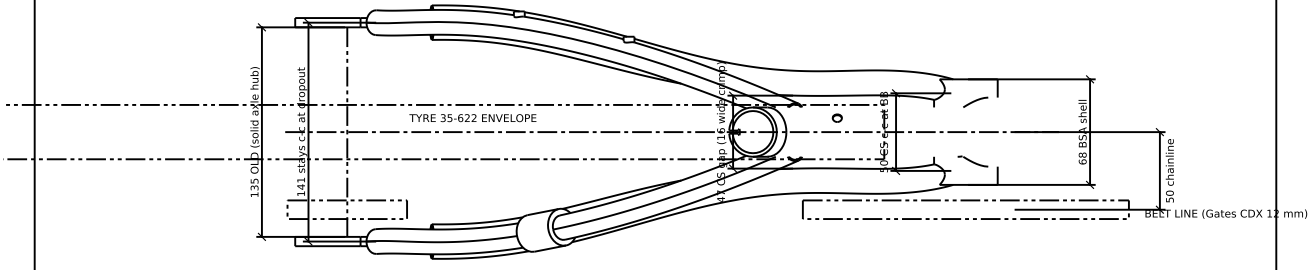

SLIDING DROPOUT DETAIL (DRIVE SIDE, OUTSIDE VIEW)
Frame: 6Al-4V receiver plate, 6 mm, window + 2 x M6 slots (6.5 wide)
Slider (phantom, bought-in): axle in vertical slot; non-drive slider carries the post mount
Axle marks: CS 395 / 401.5 (115T belt) / 409



NOTES
1. Chainstays 22.2 x 0.9 crimped to 16 x 27 oval from BB to 110 mm behind BB (clears 35 mm tyre AND 60T belt ring at 50 chainline).
2. Stays run at 70.5 mm from centre plane near the dropout so the belt and rear cog clear the drive-side stays.
3. Belt drive requires a frame split: bolted splitter in the drive-side seat stay (shown), or a split dropout per builder's standard.
4. Sliding dropouts tension the belt and carry the rear post mount; 160 mm rotor (on the non-drive slider); 160 rotor on the non-drive side. Rotor and caliper clear the frame by >= 3 mm over the full travel. No rim-brake bridge.
5. Rear hose: internal through top tube (6 mm ports, non-drive side), then along the non-drive seat stay on 2 x M4 guide bosses.

TITANIUM TRACK COMMUTER - SIZE 53 S
REAR END PLAN VIEW + DROPOUT DETAIL
Ti 3Al-2.5V / 6Al-4V PROJECTION: 1st angle
SHEET 2/2 SCALE 1:2 ON A3 UNITS mm / deg REV A