

# Smart grids: from traditional to modernized resilient systems

Víctor Escala García  
Josep Fanals Batllori  
Pol Heredia Julbe  
Roger Izquierdo Toro  
Palina Nicolas

## **Smart Grids**

January 13, 2021

## 1. Introduction

## 2. Phase 1

### 2.1 Results

### 2.2 Problems identification

## 3. Phase 2

### 3.1 New lines

### 3.2 Results

## 4. Phase 3

### 4.1 Placement of renewables

### 4.2 Results

## 5. Phase 4

### 5.1 Storage + power plant

### 5.2 Results

## 6. SGAM

### 6.1 Description

## 7. Conclusions

## 8. Extra

Smart grids: from traditional to modernized resilient systems

Group 2

Introduction

Phase 1

Results

Problems identification

Phase 2

New lines

Results

Phase 3

Placement of renewables

Results

Phase 4

Storage + power plant

Results

SGAM

Description

Conclusions

Extra

- ▶ Smart grids are becoming a necessity in order to integrate renewables, accommodate new actors, improve the observability and efficiency.
- ▶ The transition from conventional systems towards smart grids is challenging:
  - ▶ Incorporate distributed sources of energy.
  - ▶ Integrate storage systems.
  - ▶ Rely less on large traditional centralized power plants.

Thus, we have divided the progressive adaptations:

Chapter	Activities
Phase 1	Initial solution of the system
Phase 2	Addition of lines
Phase 3	Integration of wind and solar
Phase 4	Rehabilitated power plant and storage
SGAM	HLUC related to contingencies

Table 1: Phases of the project to move towards smart grids

Smart grids: from  
traditional to  
modernized  
resilient systems

Group 2

Introduction

Phase 1

Results

Problems identification

Phase 2

New lines

Results

Phase 3

Placement of renewables

Results

Phase 4

Storage + power plant

Results

SGAM

Description

Conclusions

Extra

## 1. Introduction

## 2. Phase 1

### 2.1 Results

### 2.2 Problems identification

## 3. Phase 2

### 3.1 New lines

### 3.2 Results

## 4. Phase 3

### 4.1 Placement of renewables

### 4.2 Results

## 5. Phase 4

### 5.1 Storage + power plant

### 5.2 Results

## 6. SGAM

### 6.1 Description

## 7. Conclusions

## 8. Extra

Smart grids: from traditional to modernized resilient systems

Group 2

Introduction

Phase 1

Results

Problems identification

Phase 2

New lines

Results

Phase 3

Placement of renewables

Results

Phase 4

Storage + power plant

Results

SGAM

Description

Conclusions

Extra

5 / 35

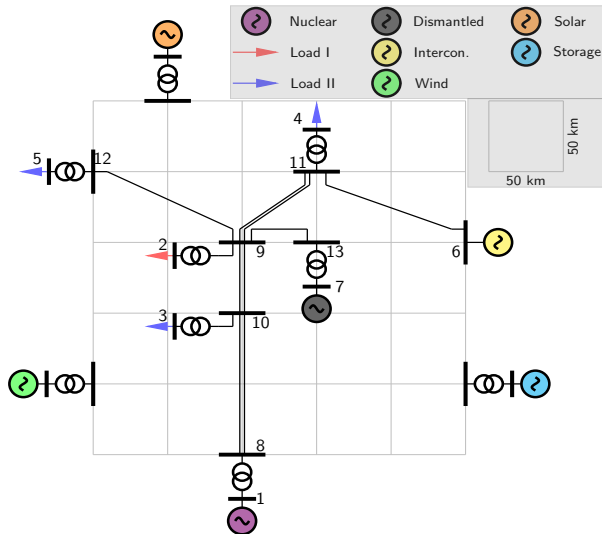


Figure 1: Overview of the network

# Initial bus voltages

Smart grids: from traditional to modernized resilient systems

Group 2

Introduction

Phase 1

Results

Problems identification

Phase 2

New lines

Results

Phase 3

Placement of renewables

Results

Phase 4

Storage + power plant


Results

SGAM

Description

Conclusions

Extra

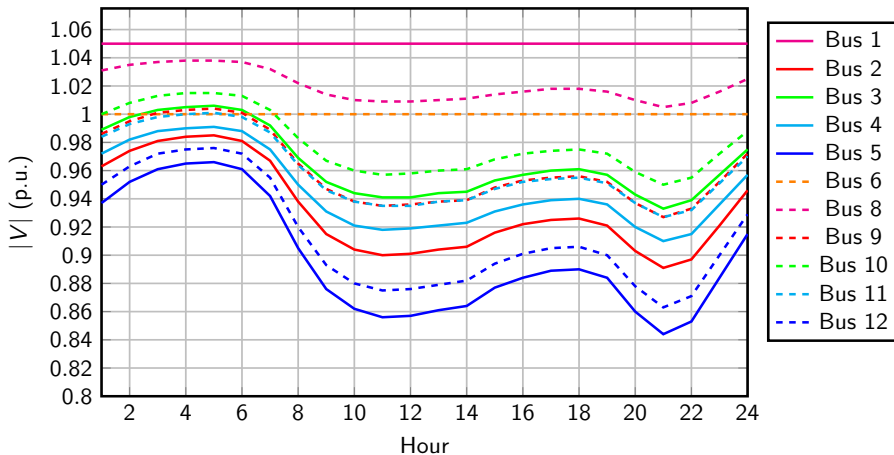

**Figure 2:** Voltage profile during 24 hours for the initial grid. The low-voltage buses are plotted in solid lines; the high-voltage ones are in dashed lines.

Smart grids: from traditional to modernized resilient systems

Group 2

Introduction

Phase 1

Results

Problems identification

Phase 2

New lines

Results

Phase 3

Placement of renewables

Results

Phase 4

Storage + power plant

Results

SGAM

Description

Conclusions

Extra

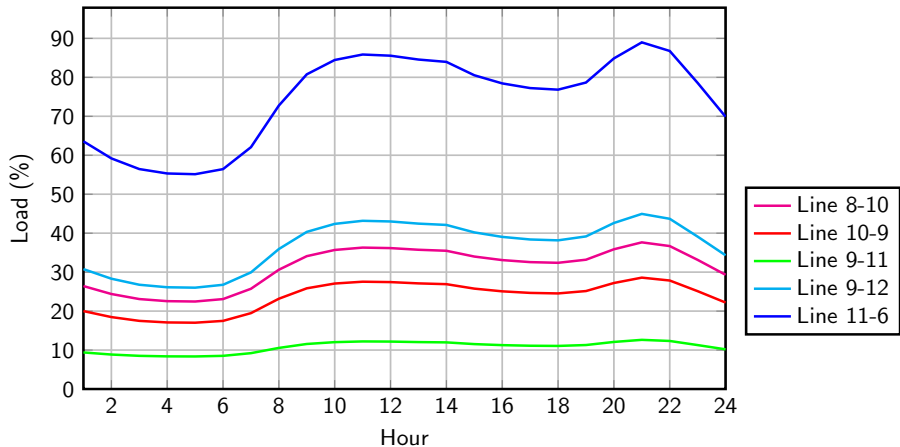


Figure 3: Representation of the percentual loading of the lines during 24 hours

The main observed issues are:

- ▶ Some load buses are below 0.9 p.u. during peak hours.
- ▶ While no lines surpass 100% of load, the interconnection line is close to 90%.
- ▶ In addition, the  $N - 1$  criteria is not met:

Element	Disconnection time (h)	Consequences
Line 8-10	12.50	No load served - divergence
Line 9-10	6.25	No load served - divergence
Line 9-11	8.85	Loads at buses 2, 3 and 5 unserved
Line 9-12	13.98	Load at bus 5 unserved
Line 11-6	13.98	No load served
Trafo 1-8	1.20	No load served - divergence
Trafo 2-9	1.20	Load at bus 2 unserved
Trafo 3-10	1.20	Load at bus 3 unserved
Trafo 4-11	1.20	Load at bus 4 unserved
Trafo 5-12	1.20	Load at bus 5 unserved

Table 2: Disconnection time and consequences of losing each element



Smart grids: from  
traditional to  
modernized  
resilient systems

Group 2

Introduction

Phase 1

Results

Problems identification

Phase 2

New lines

Results

Phase 3

Placement of renewables

Results

Phase 4

Storage + power plant

Results

SGAM

Description

Conclusions

Extra

## 1. Introduction

## 2. Phase 1

### 2.1 Results

### 2.2 Problems identification

## 3. Phase 2

### 3.1 New lines

### 3.2 Results

## 4. Phase 3

### 4.1 Placement of renewables

### 4.2 Results

## 5. Phase 4

### 5.1 Storage + power plant

### 5.2 Results

## 6. SGAM

### 6.1 Description

## 7. Conclusions

## 8. Extra

# Potential addition of lines

Smart grids: from traditional to modernized resilient systems

Group 2

Introduction

Phase 1

Results

Problems identification

Phase 2

New lines

Results

Phase 3

Placement of renewables

Results

Phase 4

Storage + power plant

Results

SGAM

Description

Conclusions

Extra

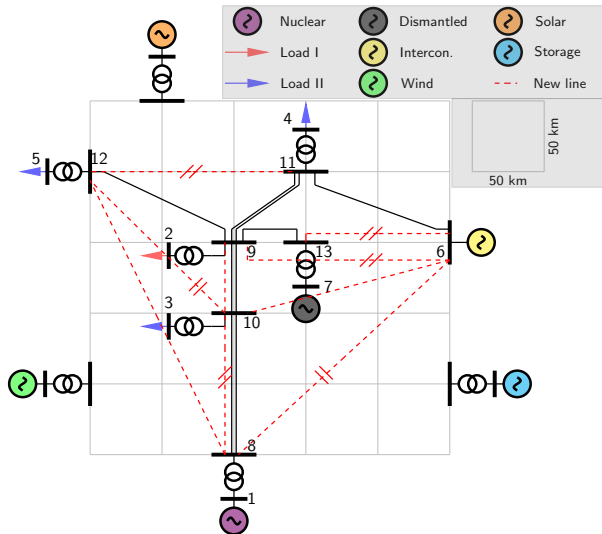


Figure 4: Overview of the new network. Double line indicates double circuit.

# Algorithm to compute contingencies

Smart grids: from traditional to modernized resilient systems

Group 2

Introduction

Phase 1

Results

Problems identification

Phase 2

New lines

Results

Phase 3

Placement of renewables

Results

Phase 4

Storage + power plant

Results

SGAM

Description

Conclusions

Extra

**Input:** net initialized class,  $j$ ,  $n$

**Output:** stored results

Generate permutations  $\forall \sigma_g$  where  $g = [1, 2, \dots, 2^{(n-j)}]$

**for**  $i = [1, 2, \dots, j]$  **do**

$\sigma_i \leftarrow \text{false}$

$\sigma_r \leftarrow \text{true}$ , where  $r \neq i$  and  $r \leq j$

$\mathcal{A} \leftarrow \{\mathbf{1}_{\sigma_1}, \mathbf{1}_{\sigma_2}, \dots, \mathbf{1}_{\sigma_j}\}$

**for**  $g = [1, 2, \dots, 2^{(n-j)}]$  **do**

$[\sigma_{j+1}, \sigma_{j+2}, \dots, \sigma_n] \leftarrow \sigma_g$

$\mathcal{B} \leftarrow \{\mathbf{1}_{\sigma_{j+1}}, \mathbf{1}_{\sigma_{j+2}}, \dots, \mathbf{1}_{\sigma_n}\}$

$\mathcal{N} \leftarrow \mathcal{A} \cup \mathcal{B}$

`pandapower.timeseries.run_timeseries( $\mathcal{N}$ , net)`

Store results

**end**

**end**

**Algorithm 1:** Pseudocode to solve the contingencies

Top 10 optimal configurations. Requirements are met and cost is minimized.

Identifier	New lines	Infraestructure cost (M€)
19	[6-13, 6-10, 8-9, 10-12]	359.50
214	[6-13, 6-10, 11-12, 8-9]	362.99
77	[6-13, 8-9, 10-12, 9-6]	375.04
49	[6-13, 11-12, 8-9, 9-6]	378.54
80	[6-13, 6-10, 11-12, 8-9, 10-12]	420.63
189	[6-13, 6-10, 8-9, 10-12, 9-6]	420.63
45	[6-13, 6-10, 8-9, 10-12, 8-12]	423.96
70	[6-13, 8-9, 10-12, 9-6]	424.12
157	[6-13, 6-10, 11-12, 8-9, 8-12]	427.46
250	[6-13, 11-12, 8-9, 10-12, 9-6]	436.17

Table 3: Best configurations with the additional lines

Serious need to install more lines connected to the interconnection bus.

Same for a rise in the voltage.

Identifier	New lines	Lines (M€)	Transformers (M€)	Total (M€)
163	[6-13, 8-9, 10-12]	313.92	64.79	378.71
133	[6-13, 11-12, 8-9]	317.41	64.79	382.20
235	[6-13, 8-9, 8-12]	320.75	64.79	385.54
30	[6-13, 8-12, 6-8]	346.07	64.79	410.86
19	[6-13, 6-10, 8-9, 10-12]	359.50	64.79	424.29
214	[6-13, 6-10, 11-12, 8-9]	362.99	64.79	427.78
58	[6-13, 6-10, 8-9, 8-12]	366.33	64.79	431.12
77	[6-13, 8-9, 10-12, 9-6]	375.04	64.79	439.83
169	[6-13, 8-9, 10-12, 8-12]	378.38	64.79	443.17
49	[6-13, 11-12, 8-9, 9-6]	378.54	64.79	443.33

Table 4: Economic results of replacing the substations

Three additional lines instead of four are required. However, the cost becomes a bit larger. It becomes a sub-optimal choice.

Smart grids: from  
traditional to  
modernized  
resilient systems

Group 2

Introduction

Phase 1

Results

Problems identification

Phase 2

New lines

Results

Phase 3

Placement of renewables

Results

Phase 4

Storage + power plant

Results

SGAM

Description

Conclusions

Extra

## 1. Introduction

## 2. Phase 1

### 2.1 Results

### 2.2 Problems identification

## 3. Phase 2

### 3.1 New lines

### 3.2 Results

## 4. Phase 3

### 4.1 Placement of renewables

### 4.2 Results

## 5. Phase 4

### 5.1 Storage + power plant

### 5.2 Results

## 6. SGAM

### 6.1 Description

## 7. Conclusions

## 8. Extra

# Connection of renewables to the system

Smart grids: from traditional to modernized resilient systems

Group 2

Introduction

Phase 1

Results

Problems identification

Phase 2

New lines

Results

Phase 3

Placement of renewables

Results

Phase 4

Storage + power plant

Results

SGAM

Description

Conclusions

Extra

15 / 35

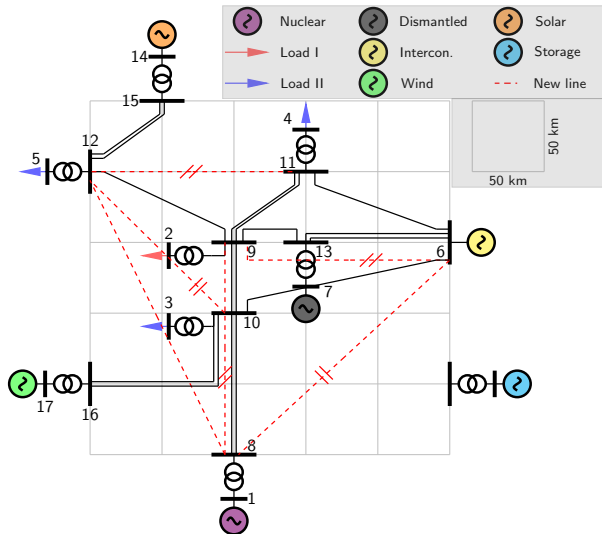


Figure 5: Overview of the network with renewables and the potential addition of lines

Profile extracted from PVGIS:

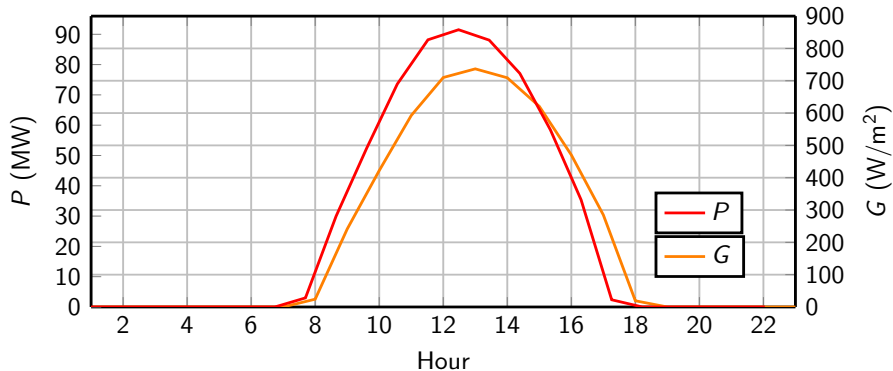


Figure 6: Irradiance and power from the PV plant along a representative day



Profile extracted from NASA database:

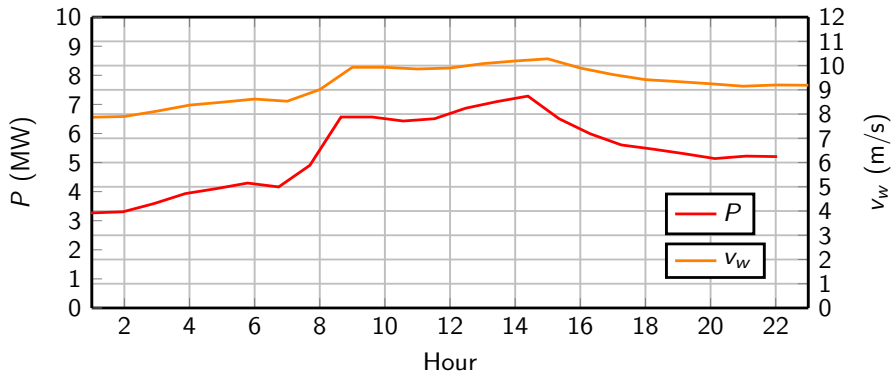


Figure 7: Wind speed and output power from the wind farm

Smart grids: from  
traditional to  
modernized  
resilient systems

Group 2

Introduction

Phase 1

Results

Problems identification

Phase 2

New lines

Results

Phase 3

Placement of renewables

Results

Phase 4

Storage + power plant

Results

SGAM

Description

Conclusions

Extra

It is worth it to compare the variation of the magnitudes due to renewables in normal operation.

Attributes	Without renewables	With renewables
$V_{min}$ (p.u.)	0.962	0.968
$V_{max}$ (p.u.)	1.050	1.050
Max. load (%)	41.65	40.76
Max. losses (MW)	14.54	14.43
Correct operation?	Yes	Yes

Table 5: Main results to compare between the grid with and without renewables

Results improve a bit. Unfortunately, the installed renewable power is not significant to cause a large impact.

Still four lines have to be added (interconnection lines have been set as static).  
The cost increases slightly because renewable power plants require extra lines.

Identifier	New lines	Infraestructure cost (M€)
24	[8-9, 10-12]	402.71
12	[8-9, 9-6]	406.21
46	[11-12, 8-9]	406.21
8	[8-9, 8-12]	409.54
0	[11-12, 8-9, 10-12]	463.84
4	[8-9, 10-12, 9-6]	463.84
37	[11-12, 10-12, 9-6]	463.84
63	[8-9, 10-12, 8-12]	467.18
20	[11-12, 8-9, 9-6]	467.34
38	[11-12, 8-9, 8-12]	470.67

Table 6: Best configurations with the additional lines

Smart grids: from  
traditional to  
modernized  
resilient systems

Group 2

Introduction

Phase 1

Results

Problems identification

Phase 2

New lines

Results

Phase 3

Placement of renewables

Results

Phase 4

Storage + power plant

Results

SGAM

Description

Conclusions

Extra

## 1. Introduction

## 2. Phase 1

### 2.1 Results

### 2.2 Problems identification

## 3. Phase 2

### 3.1 New lines

### 3.2 Results

## 4. Phase 3

### 4.1 Placement of renewables

### 4.2 Results

## 5. Phase 4

### 5.1 Storage + power plant

### 5.2 Results

## 6. SGAM

### 6.1 Description

## 7. Conclusions

## 8. Extra



The battery is based on lithium-ion technology.

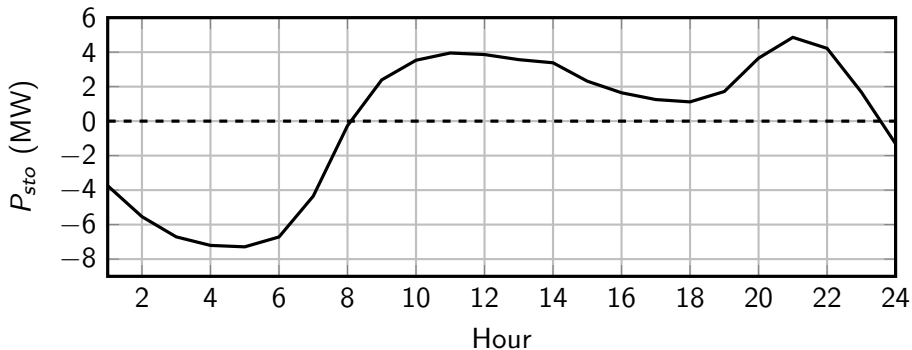


Figure 9: Daily charge and discharge profile for the battery system

# Daily profile of the dismantled plant

Smart grids: from traditional to modernized resilient systems

Group 2

Introduction

Phase 1

Results

Problems identification

Phase 2

New lines

Results

Phase 3

Placement of renewables

Results

Phase 4

Storage + power plant

Results

SGAM

Description

Conclusions

Extra

Four fuels were considered: coal, diesel, natural gas, and biomass.

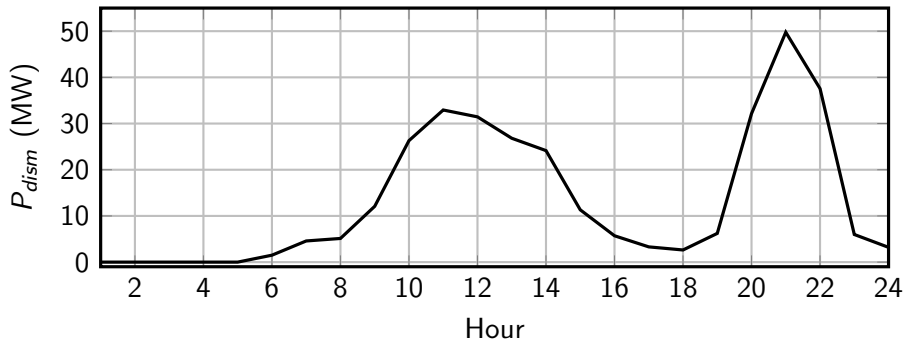


Figure 10: Daily generation profile of the rehabilitated plant

Smart grids: from traditional to modernized resilient systems

Group 2

Introduction

Phase 1

Results

Problems identification

Phase 2

New lines

Results

Phase 3

Placement of renewables

Results

Phase 4

Storage + power plant

Results

SGAM

Description

Conclusions

Extra

Improvement of all grid attributes.

Attributes	Phase 2	Phase 3	Phase 4
$V_{min}$ (p.u.)	0.962	0.968	0.971
$V_{max}$ (p.u.)	1.050	1.050	1.050
Max. load (%)	41.65	40.76	39.63
Max. losses (MW)	14.54	14.43	13.89
Correct operation?	Yes	Yes	Yes

Table 7: Main results to compare between phases

Whole emission factor of 63 kg CO<sub>2</sub>/MWh. Biomass is the cheapest option.

Fuel	Dismantled (tCO <sub>2</sub> -eq)	Interconnection (tCO <sub>2</sub> -eq)	Total (tCO <sub>2</sub> -eq)
Coal	108.56	890.34	998.90
Diesel	89.64	890.34	979.98
Gas	59.76	890.34	950.10
Biomass	0.00	890.34	890.34

Table 8: Total daily emissions depending on the scenario



The combination of storage and the dismantled plant help at having to install one less additional line.

Identifier	New lines	Infraestructure cost (M€)
33	[8-9]	419.49
24	[8-9, 10-12]	477.12
12	[8-9, 9-6]	480.62
46	[11-12, 8-9]	480.62
8	[8-9, 8-12]	483.96
57	[8-9, 6-8]	505.94
0	[8-9, 10-12]	538.25
4	[8-9, 10-12, 9-6]	538.25
37	[11-12, 10-12, 8-12]	538.25
63	[8-9, 10-12, 8-12]	541.59

Table 9: Best configurations with storage and a rehabilitated plant

The total cost rises a bit due to the connections of storage.

Smart grids: from  
traditional to  
modernized  
resilient systems

Group 2

Introduction

Phase 1

Results

Problems identification

Phase 2

New lines

Results

Phase 3

Placement of renewables

Results

Phase 4

Storage + power plant

Results

SGAM

Description

Conclusions

Extra

## 1. Introduction

## 2. Phase 1

### 2.1 Results

### 2.2 Problems identification

## 3. Phase 2

### 3.1 New lines

### 3.2 Results

## 4. Phase 3

### 4.1 Placement of renewables

### 4.2 Results

## 5. Phase 4

### 5.1 Storage + power plant

### 5.2 Results

## 6. SGAM

### 6.1 Description

## 7. Conclusions

## 8. Extra

## HLUC layers:

- ▶ Component
- ▶ Business
- ▶ Function

## Involved PUC layers:

- ▶ Information
- ▶ Communication

- ▶ **Scope:** evaluate the effects of a fault and calculate any overloads based on a computer application that simulates the power system to be prepared for any possible fault.
- ▶ **Objective:** protection of the impact of faults.
- ▶ **Grid issues:** short-circuits, overloads, undervoltages.
- ▶ **Relation to other use cases:** PUC 01: demand and generation forecasting; PUC 02: grid operation scheduling; PUC 03: grid observability and monitoring; PUC 04: fault detection and localization. Extracted from RESOLVD.
- ▶ **Viewpoint:** Technical.
- ▶ **Type:** HLUC.

Table 10: General description of the HLUC

Smart grids: from  
traditional to  
modernized  
resilient systems

Group 2

Introduction

Phase 1

Results

Problems identification

Phase 2

New lines

Results

Phase 3

Placement of renewables

Results

Phase 4

Storage + power plant


Results

SGAM

Description

Conclusions

Extra



- ▶ Geographical Information System (GIS)
- ▶ Grid Operation Scheduler (GOS)
- ▶ Weather Forecast (WF)
- ▶ Reserve Aggregator (RA)
- ▶ Energy Forecaster (EF)
- ▶ Transmission System Operator (TSO)
- ▶ Distribution System Operator (DSO)
- ▶ Transmission Management System (TMS)
- ▶ Distribution Management System (DMS)

# Business and function layer

Smart grids: from traditional to modernized resilient systems

Group 2

Introduction

Phase 1

Results

Problems identification

Phase 2

New lines

Results

Phase 3

Placement of renewables

Results

Phase 4

Storage + power plant

Results

SGAM

Description

Conclusions

Extra

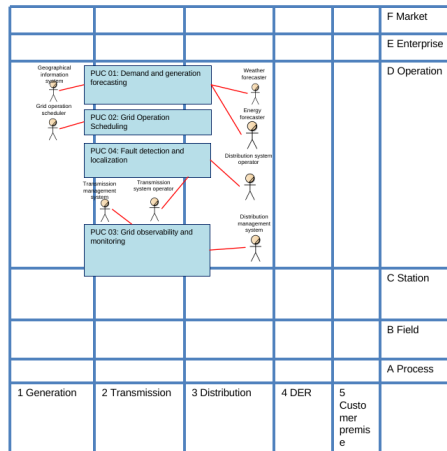
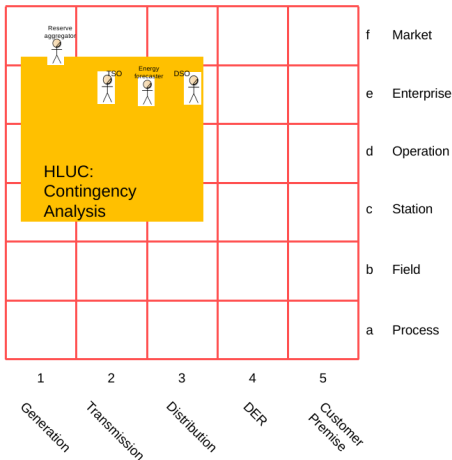


Figure 11: Business and function layer mapping

Smart grids: from  
traditional to  
modernized  
resilient systems

Group 2

Introduction

Phase 1

Results

Problems identification

Phase 2

New lines

Results

Phase 3

Placement of renewables

Results

Phase 4

Storage + power plant

Results

SGAM

Description

Conclusions

Extra

## 1. Introduction

## 2. Phase 1

### 2.1 Results

### 2.2 Problems identification

## 3. Phase 2

### 3.1 New lines

### 3.2 Results

## 4. Phase 3

### 4.1 Placement of renewables

### 4.2 Results

## 5. Phase 4

### 5.1 Storage + power plant

### 5.2 Results

## 6. SGAM

### 6.1 Description

## 7. Conclusions

## 8. Extra

Smart grids: from traditional to modernized resilient systems

Group 2

Introduction

Phase 1

Results

Problems identification

Phase 2

New lines

Results

Phase 3

Placement of renewables

Results

Phase 4

Storage + power plant

Results

SGAM

Description

Conclusions

Extra

- ▶ The initial grid needs improvements to reduce voltage drops and lines loadings.
- ▶ A methodology to include new lines is critical. An algorithm to compute the contingencies has been presented.
- ▶ More lines connecting with the bus of interconnection are required.
- ▶ Installing renewables has a minor impact on the final results (although they improve).
- ▶ The storage unit and the dismantled power plant reduce the needs of additional lines.
- ▶ The high level use case regarding contingencies has been described following the SGAM methodology.

Smart grids: from  
traditional to  
modernized  
resilient systems

Group 2

Introduction

Phase 1

Results

Problems identification

Phase 2

New lines

Results

Phase 3

Placement of renewables

Results

Phase 4

Storage + power plant

Results

SGAM

Description

Conclusions

Extra

## 1. Introduction

## 2. Phase 1

### 2.1 Results

### 2.2 Problems identification

## 3. Phase 2

### 3.1 New lines

### 3.2 Results

## 4. Phase 3

### 4.1 Placement of renewables

### 4.2 Results

## 5. Phase 4

### 5.1 Storage + power plant

### 5.2 Results

## 6. SGAM

### 6.1 Description

## 7. Conclusions

## 8. Extra



Smart grids: from traditional to modernized resilient systems

Group 2

- ▶ Full writing in  $\text{\LaTeX}$ .
- ▶ Learning of Python and packages such as pandapower and pandas.
- ▶ Collaborative work with Git:



Figure 12: GitHub commits history

Smart grids: from  
traditional to  
modernized  
resilient systems

Group 2

Introduction

Phase 1

Results

Problems identification

Phase 2

New lines

Results

Phase 3

Placement of renewables

Results

Phase 4

Storage + power plant

Results

SGAM

Description

Conclusions

Extra

- ▶ Víctor: Phase 1 results identification, SGAM
- ▶ Josep: full Python code, results extraction for all phases, report writing, presentation
- ▶ Pol: initial Python code, renewables sizing, SGAM
- ▶ Roger: Phase 1 results identification, Phase 4, SGAM, writing corrections
- ▶ Palina: Phase 1 results identification, introduction, writing corrections, supervision

# Smart grids: from traditional to modernized resilient systems

Víctor Escala García  
Josep Fanals Batllori  
Pol Heredia Julbe  
Roger Izquierdo Toro  
Palina Nicolas

## **Smart Grids**

January 13, 2021