














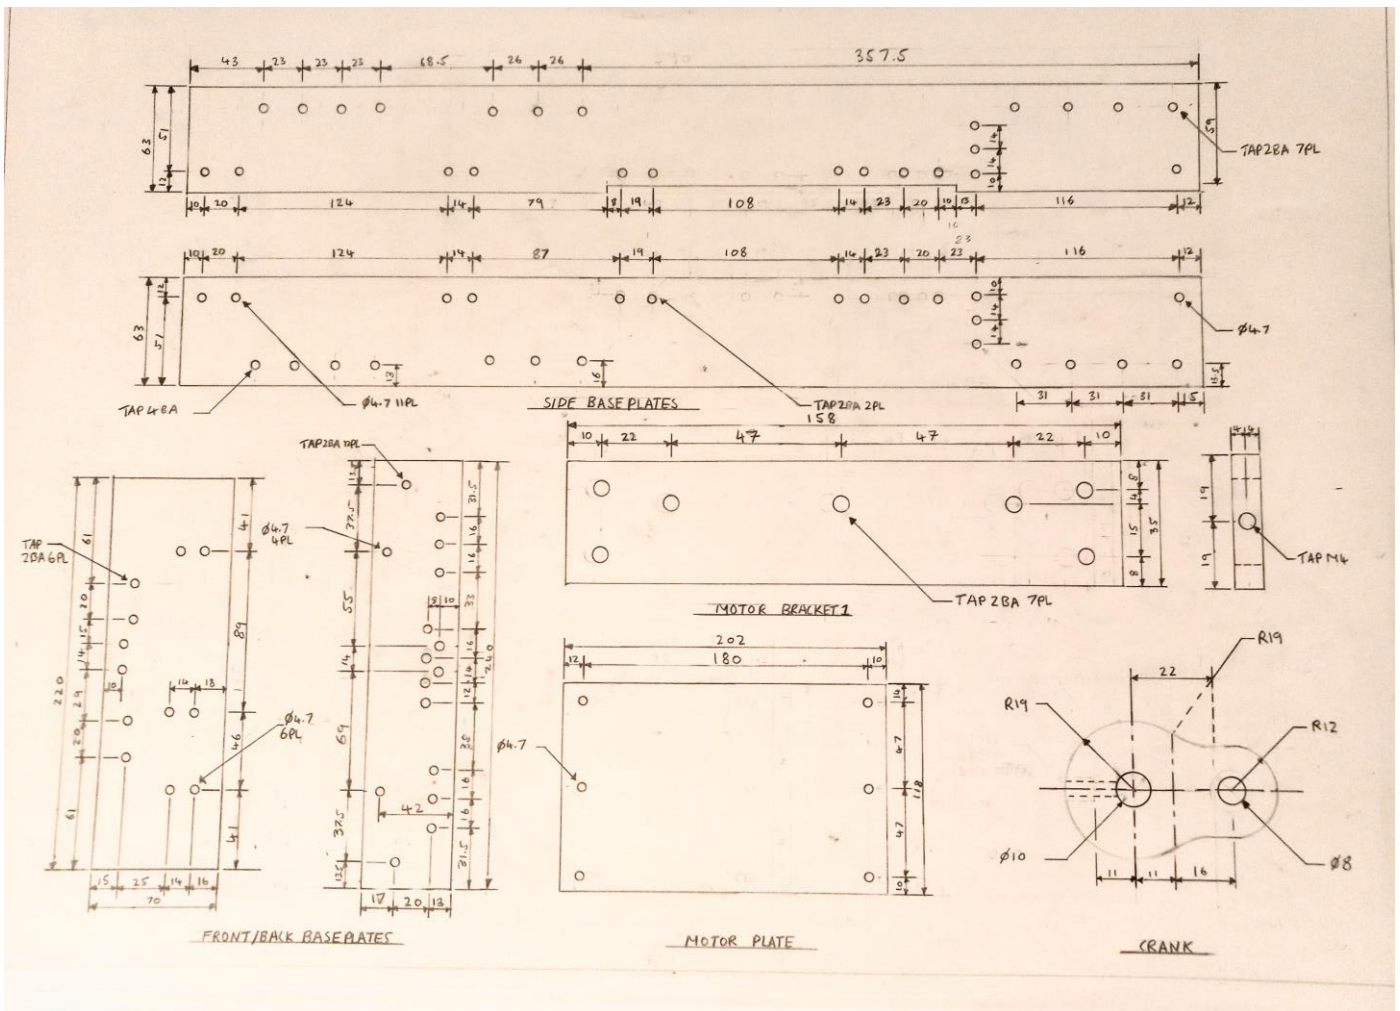

The image above shows drawings of:

- The chassis footplates (Top) → These components provide a flat surface on the top of the chassis to which the bodywork can be mounted to.
- The crank (Bottom right) → The cranks mount to the end of each axle and provide the means to which rotary motion can be converted to reciprocating motion for the coupling rods.