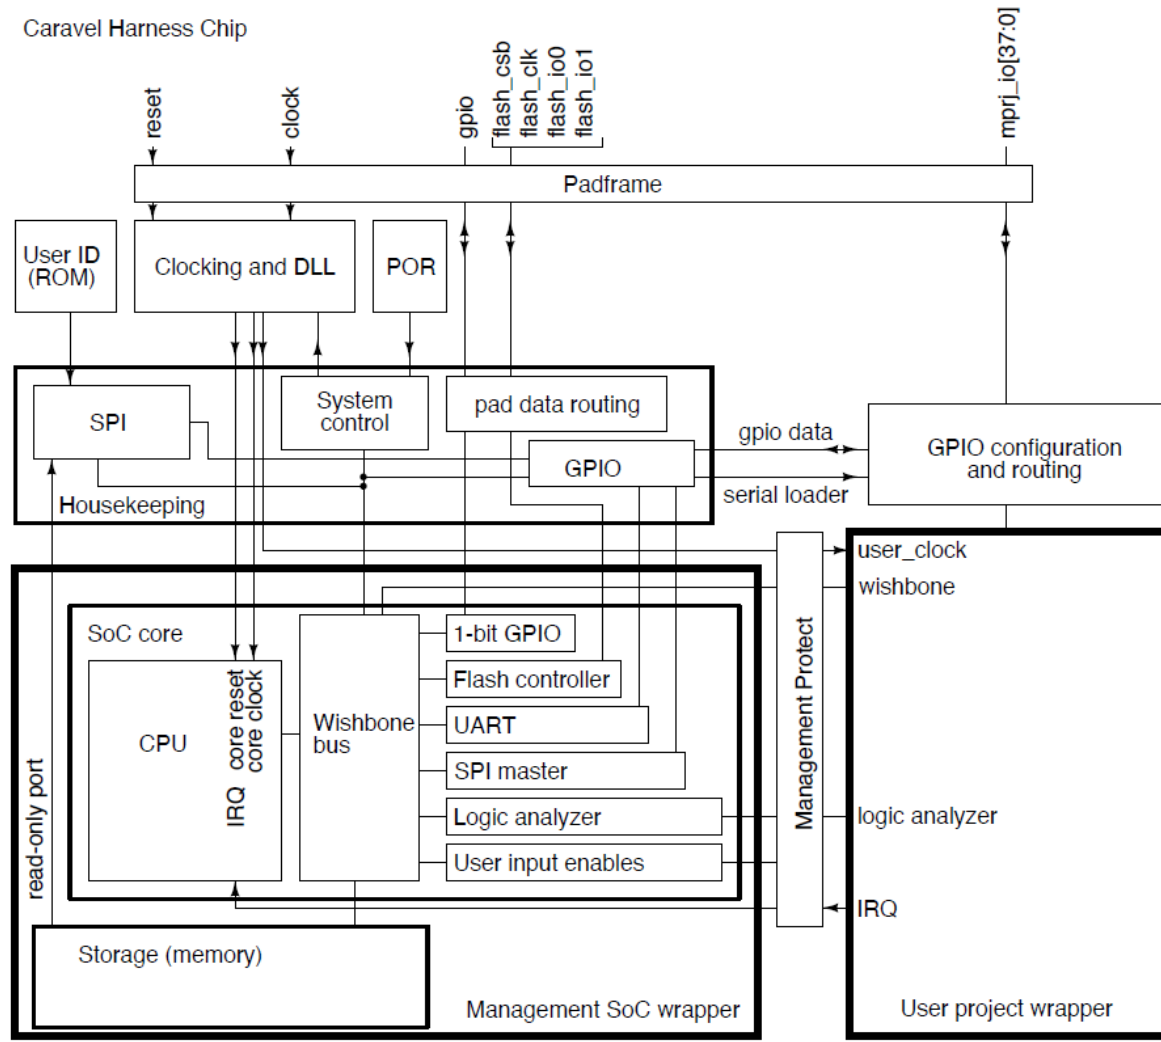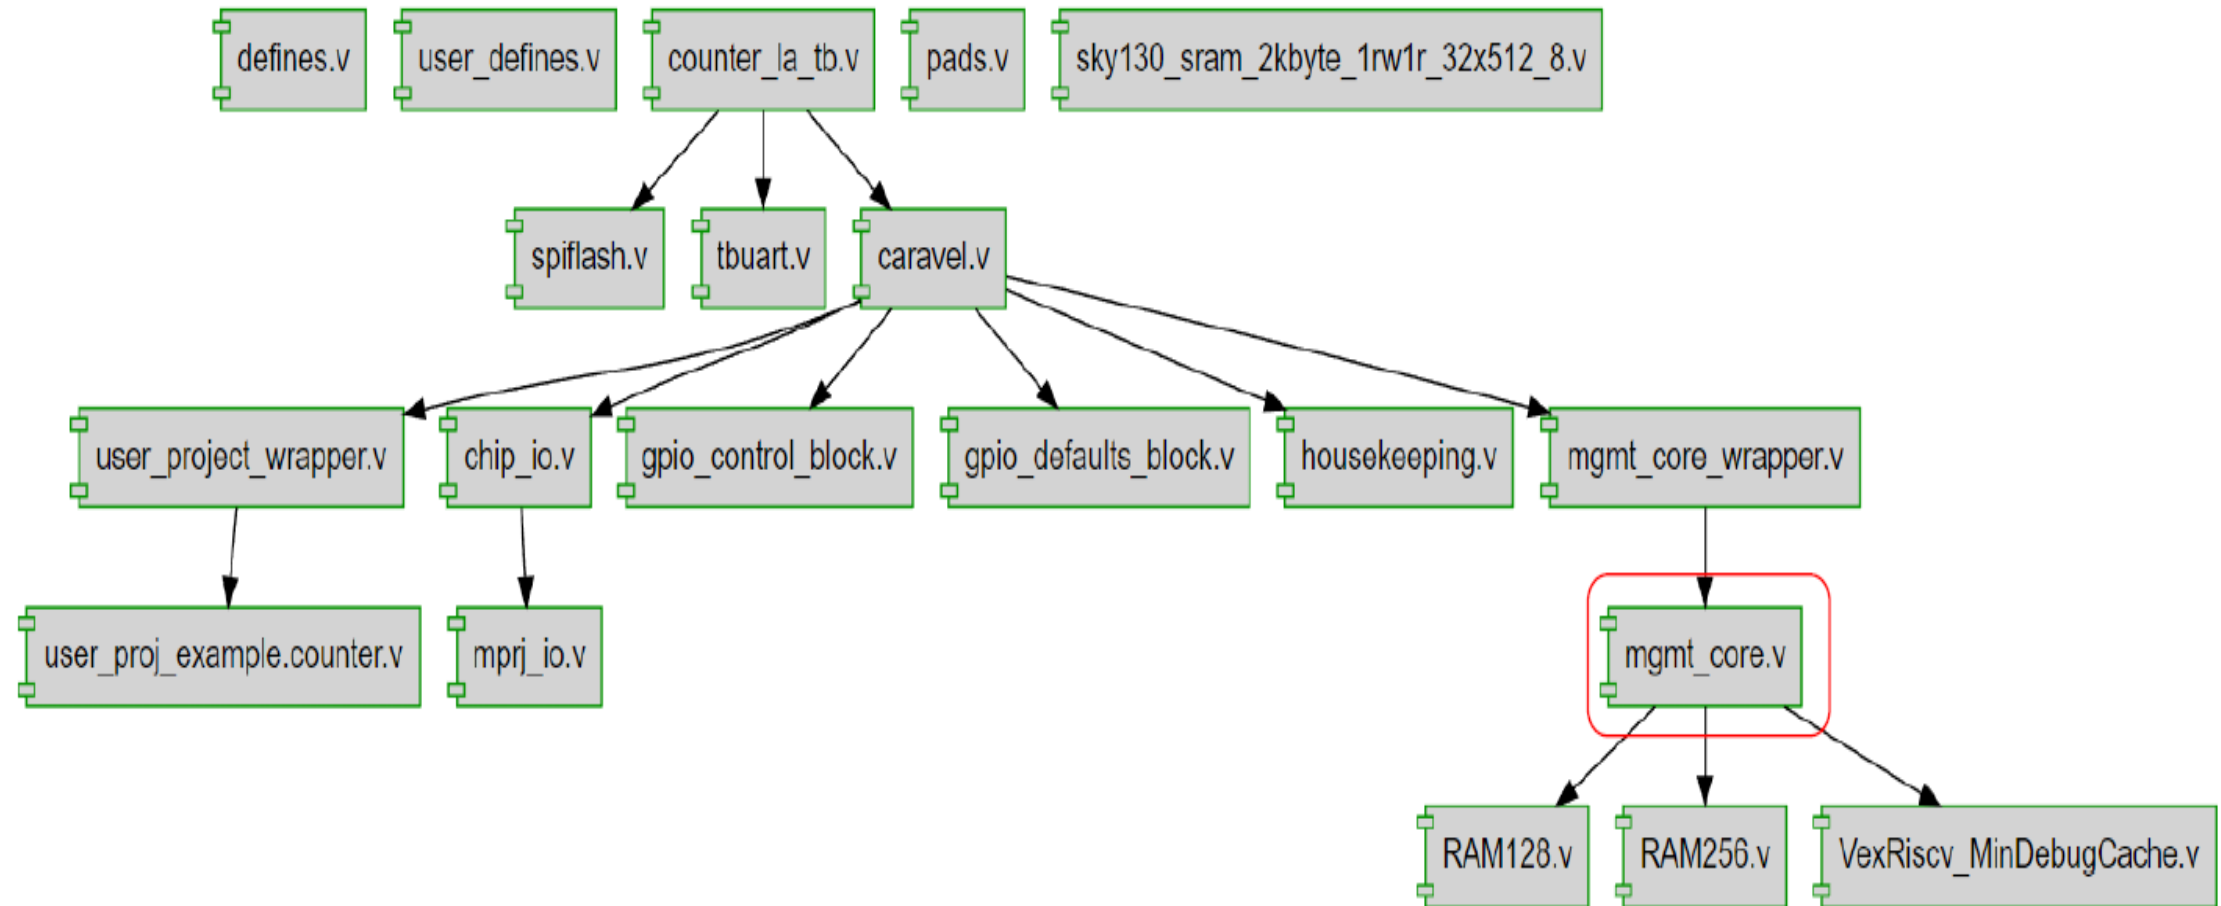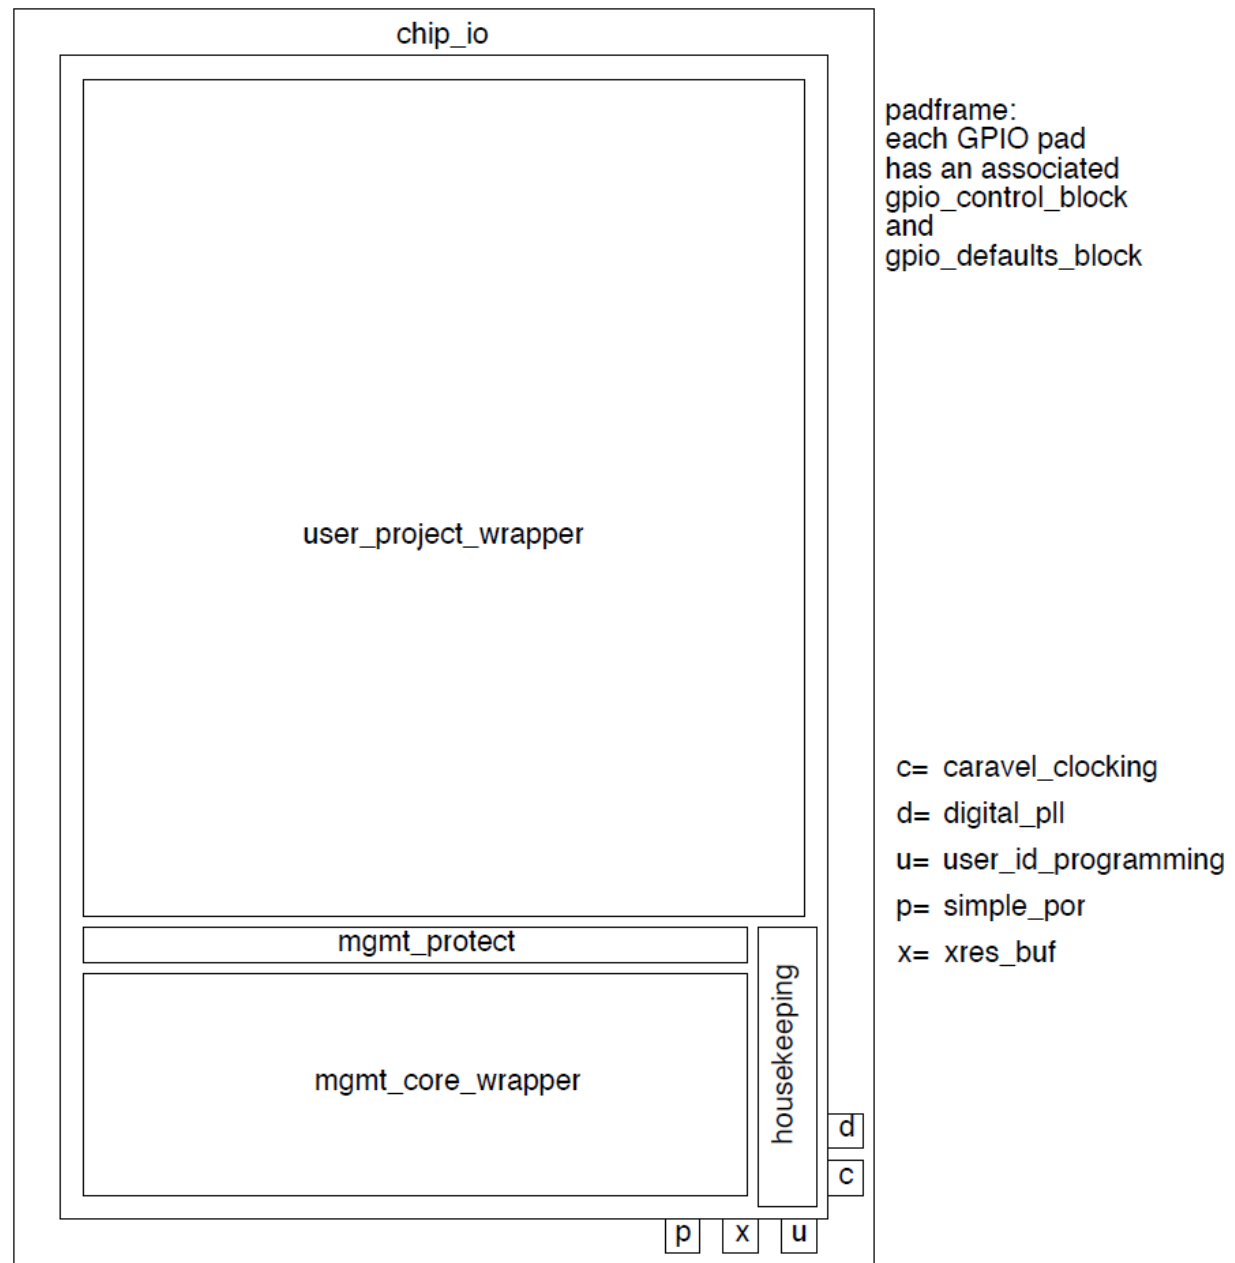# Caravel SOC Introduction

Jiin Lai

System Block Diagram

Caravel Architecture

- Top Level : Clocking (DLL)、 userID, POR, GPIO

- HouseKeeping - exchange data with management SoC via byte-wide SPI

- Management Area – Peripherals: timer, UART, GPIO, SPI, RISC-V
  - Configure User Project I/O pad
  - Observe and control User Project signals (on-chip logic analyzer)
  - Control the User Project power supply

- User Project Area
  - 38 MPRJ
  - 128 logic analyzer probes
  - Wishbone port to interface with management SoC

- Power-up, SPI automatically configures the GPIO

Caravel Github – Design Hierarchy

Caravel Floorplan

chip_io

user_project_wrapper

mgmt_protect

mgmt_core_wrapper

housekeeping

d

c

p x u

padframe:
each GPIO pad
has an associated
gpio_control_block
and
gpio_defaults_block

c= caravel_clocking

d= digital_pll

u= user_id_programming

p= simple_por

x= xres_buf

Video

Topics	Author	Video
System Block Diagram		
Reset POR	Tony	
Management Project Area	Tony	https://youtu.be/hbISphnvVYg
DLL, Configuration SPI	Tony	
Housekeep SPI	Willy	
GPIO	Willy	https://youtu.be/Vw3TGc-YV8E
SPI	Willy	
Memory-mapped IO	Willy	
Counter/Timer/UART	Hurry	https://youtu.be/-o87eNkqmPo
Wishbone	Josh	https://youtu.be/Xvk4jCB9l7U
IRQ	Josh	https://youtu.be/G3oT0DJfZMk
SRM	Josh	https://youtu.be/X8sMMfrXKac
User Project Interface	Josh	
Testbench	Josh	https://youtu.be/0neIx5DOK1g
Firmware	Josh	

Reference

- Caravel document
  - https://github.com/efabless/caravel/tree/main/docs

- Management SOC firmware examples (refer to class lecture) – based on mpw-8c branch
  - https://github.com/efabless/caravel/tree/b5010be8a7b89dd52e6da2c6f75f1ab05de43963/verilog/dv/caravel/mgmt_soc