


Trade Winds

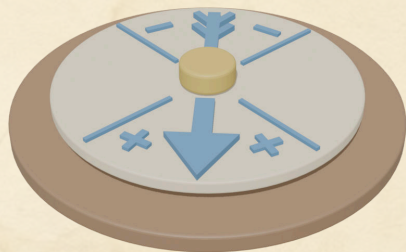

Set the **Wind Dial** at the table edge where everyone can see it. The arrow points the way the wind blows, and the ridges split the vane into four quarters: + around the arrowhead and – around the tail.

EACH ROUND

1. **Spin the dial.** Before the first player's turn each round, that player spins the vane. Where the arrow stops is the wind for the round.
2. **Read it as you click forward.** Compare the way the ship is pointing to the arrow. Where the ship is on the table doesn't matter.

SHIP'S HEADING	WIND	MOVE COUNT
+ quarter	Fair wind	+1
– quarter	Foul wind	–1, at least 1 click
Either side quarter	Crosswind	No change

FINE PRINT

- A heading right on a ridge counts as a crosswind.
- With **Full Sail**, check the wind again for the second sail.
- **Evasive Maneuvers** slides don't use the wind.
- **Group Mode:** the moderator spins the dial at the start of every movement phase.

Printing the dial. Print wind-dial-base, -vane, -washer and -cap from the base set in PLA, no supports. A steel **M8 washer** spins better than the printed one. For a two-tone arrow, swap filament at **2.8 mm** on the vane. Stack the washer and vane on the pin and press the cap on (glue it if it's loose).