




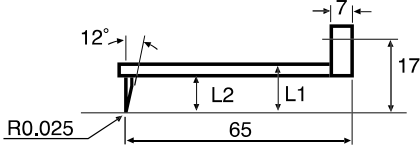
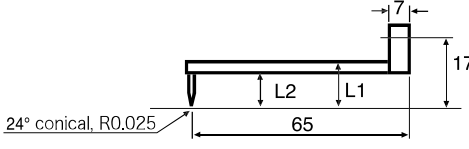

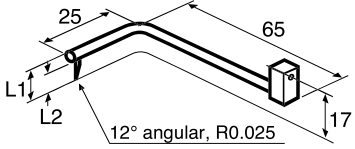

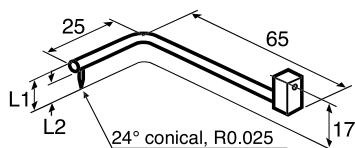




Contour Stylus

*See page 92 to 93 for the details of stylus/arm for C1710/S1910.

Applicable models ■ C1600 ■ C1700 ■ S1800 ■ S1900

Stylus tip material: Cemented carbide

Measuring application	Model	External view	d	L1	L2	Applicable arm	Remarks
General purpose(one-sided cut) 	DM45501 ²		3	60	52	010 2804	
	DM45502		3	34	26	010 2800	
	DM45503		2	21	13	010 2801	
Helix surface(cone) 	DM45504 ²		3	60	52	010 2804	• Standard accessory
	DM45505*		3	34	26	010 2800	
	DM45506		2	21	13	010 2801	
Edge line(knif edge) 	DM45507 ²		3	60	52	010 2804	
	DM45508*		3	34	26	010 2800	
	DM45509		2	21	13	010 2801	
Small holes(one-sided cut) 	DM45081		—	12	9	010 2802	• Measuring force: 10 mN or less
	DM45082		—	7	5		
	DM45083 ¹		—	3.5	1.5		
Small hole helix surface(cone) 	DM45084*		—	12	9	010 2802	• Measuring force: 10 mN or less
	DM45085		—	7	5		
	DM45086 ¹		—	3.5	1.5		
Ordinary off-set(one-sided cut) 	DM45087		—	12	9	010 2802	• Offset: 25 mm • Measuring force: 10 mN or less
	DM45088		—	7	5		
	DM45089 ¹		—	3.5	1.5		
Helix surface off-set(cone) 	DM45090		—	12	9	010 2802	• Offset: 25 mm • Measuring force: 10 mN or less
	DM45091		—	7	5		
	DM45092 ¹		—	3.5	1.5		
High precision(ball) 	DM45522 ²		3	60	52	010 2804	• Φ 0.7 ruby ball
	DM45523		3	34	26	010 2800	
	DM45524		2	21	13	010 2801	
	DM45525 ²		3	60	52	010 2804	• Φ 1 ruby ball
	DM45526		3	34	26	010 2800	
	DM45527		2	21	13	010 2801	

*Indicates stylus/arm set 010 2999

*1: Requires master ball calibration unit for small holes.

*2: Requires pickup holder joint

 Standard Inventory Parts

Contour Detectors and Arms

Applicable models ■ C1600 ■ C1700 ■ S1800 ■ S1900

Measuring application	Model	External view	Applicable stylus	Remarks
Contour detector	E-DT-CE02B		—	• C1600, S1800D/G
	E-DT-CE03C*1		—	• C1700DX/SD, S1900DX/SD
General purpose	010 2800		DM45502 DM45505 DM45508 DM45523 DM45526	• Stroke: 50 mm (when combined with left stylus) • Stylus diameter d = 3 mm
Inner surface	010 2801		DM45503 DM45506 DM45509 DM45524 DM45527	• Stroke: 50 mm (when combined with left stylus) • Stylus diameter d = 2 mm
Small holes	010 2802*		DM45081 to DM45092	• Stroke: 50 mm (when combined with left stylus)
Deep grooves	010 2804		DM45501 DM45504 DM45507 DM45522 DM45525	• 010 2744 pickup holder coupling required • Provided with auxiliary weight • Stroke: 50 mm (when combined with left stylus) • Stylus diameter d = 3 mm
Offset measurement	010 2805		DM45502 DM45505 DM45508 DM45523 DM45526	• Offset: 50 mm • Provided with auxiliary weight • Stroke: 50 mm (when combined with left stylus) • Stylus diameter d = 3 mm
	010 2806		DM45502 DM45505 DM45508 DM45523 DM45526	• Offset: 100 mm • Provided with auxiliary weight • Stroke: 50 mm (when combined with left stylus) • Stylus diameter d = 3 mm
	010 2807		DM45503 DM45506 DM45509 DM45524 DM45527	• Offset: 50 mm • Provided with auxiliary weight • Stroke: 50 mm (when combined with left stylus) • Stylus diameter d = 2 mm
Long items	010 2808		DM45501 DM45504 DM45507 DM45522 DM45525	• Lever movement range: 100 mm • Provided with auxiliary weight • 010 2744 pickup holder coupling required • Stroke: 50 mm (when combined with left stylus) • Stylus diameter d = 3 mm
Long holes	010 2810		DM45503 DM45506 DM45509 DM45524 DM45527	• Lever movement range: 100 mm • Provided with auxiliary weight • Stroke: 50 mm (when combined with left stylus) • Stylus diameter d = 2 mm
Arm/stylus set	010 2999			• Stylus : DM45505, DM45508, DM45084, DM45086 • Arms : 010 2802, 010 2805

*Indicates stylus/arm set 010 2999

*1 RoHS noncompliant

Standard Inventory Parts

SURFCOM-CONTOURRECORD
Option