
















Replaceable Roughness Profile Measuring Stylus (Tip Radius 2 µm)

Applicable models ■ S-TOUCH50 ■ S-TOUCH550 ■ FLEX-50 ■ S130 ■ S1400 ■ S1500 ■ S1900 ■ S1910 ■ S480 ■ S1800 ■ S2800 ■ S2900 ■ S-NEX **1 DX2/SD2 ■ S-NEX**1

Measuring application	Model	External view	Specifications	Remarks
General purpose 	DM43801		Rtip 2 µm, 60°conical diamond, 0.75 mN	• All orientations • Horizontal tracing possible • Standard accessory
Fine wires, knife edges 	DM43802		Rtip 2 µm, 60°knife edge-shaped diamond, 0.75 mN	• All orientations
Medium fine holes 	DM43809		Rtip 2 µm, 60°conical diamond, 0.75 mN	• All orientations • Horizontal tracing possible
Extra fine holes, gear flank 	DM43811		Rtip 2 µm, 60°conical diamond, 0.75 mN	• All orientations • Calibration with the level difference reference specimen is impossible (Optional calibrator E-MC-S50 is required)
Fine holes/ thin grooves 	DM43812*1		Rtip 2 µm, 60°conical diamond, 0.75 mN	• All orientations • Horizontal tracing possible
Hole bottom/conical surfaces 	DM43813		Rtip 2 µm, 60°conical diamond, 0.75 mN	• All orientations • Horizontal tracing possible
Corners/ tooth surfaces 	DM43814*1		Rtip 2 µm, 60°conical diamond, 0.75 mN	• All orientations • Horizontal tracing possible
Deep grooves/ round grooves 	DM43815*1		Rtip 2 µm, 60°conical diamond, 0.8 mN	• Downward measurement • Large waveform distortion
Gear tooth profiles, thread flank 	DM43818*2		Rtip 2 µm, 60°conical diamond, 0.75 mN	• All orientations • Magnification: x10000
Fine long holes 	DM43821		Rtip 2 µm, 60°conical diamond, 2 mN	• Downward measurement • Sensitivity: 1/2 • Magnification: x5000 • Large waveform distortion
Low magnification, long holes 	DM43822*1		Rtip 2 µm, 60°conical diamond, 3 mN	• Downward measurement • Sensitivity: 1/2 • Magnification: x20000
Low magnification, corners 	DM43824		Rtip 2 µm, 60°conical diamond, 4 mN	• Downward measurement • Sensitivity: 1/2 • Magnification: x20000
Deep groove corners 	DM43827		Rtip 2 µm, 60°conical diamond, 4 mN	• Downward measurement • Sensitivity: 1/2 • Magnification: x10000
Deep hole grooves, O-ring groove bottom surfaces 	DM43825		Rtip 2 µm, 60°conical diamond, 3.4 mN	• Downward measurement • Sensitivity: 1/2 • Magnification: x20000 • Large waveform distortion
Extra deep grooves 	DM43826		Rtip 2 µm, 60°conical diamond, 4 mN	• Downward measurement • Sensitivity: 1/2 • Magnification: x5000 • Large waveform distortion
Stylus set 	DM43900-A	Pickup E-DT-SS01A-B, E-DT-SSE01A	Rtip 2 µm	Nosepiece DM44026-A Stylus DM43801, DM43811, DM43812, DM43814, DM43815, DM43822

*1 Indicates stylus/nose piece set DM43900-A. The value of measuring force is when E-DT-S03A-B/E-DT-SE19A-B/E-DT-SS01A-B/E-DT-SSE01A are mounted.
*2 The value of measuring force is when E-DT-S03A-B/E-DT-SE19A-B/E-DT-SS01A-B/E-DT-SSE01A are mounted.

Replaceable Roughness Profile Measuring Stylus (Tip Radius 5 μm)

Applicable models ■ S-TOUCH50 ■ S-TOUCH550 ■ FLEX-50 ■ S130 ■ S1400 ■ S1500 ■ S1900 ■ S1910 ■ S480 ■ S1800 ■ S2800 ■ S2900 ■ S-NEX**1 DX2/SD2 ■ S-NEX**1

Measuring application	Model	External view	Specifications	Remarks
General purpose	010 2501		Rtip 5 μm , 90°conical diamond, 4 mN	- All orientations - Horizontal tracing possible
Fine wires, knife edges	010 2502		Rtip 5 μm , 90°knife edge-shaped diamond, 5 mN	All orientations
Medium fine holes	010 2509*2		Rtip 5 μm , 90°conical diamond, 4 mN	- All orientations - Horizontal tracing possible
Extra fine holes, gear flank	010 2511*2		Rtip 5 μm , 90°conical diamond, 4 mN	- All orientations - Calibration with the level difference reference specimen is impossible(Optional calibrator E-MC-S50 is required)
Fine holes/ thin grooves	010 2512*1*2		Rtip 5 μm , 90°conical diamond, 4 mN	All orientations
Hole bottom/ conical surfaces	010 2513*2		Rtip 5 μm , 90°conical diamond, 4 mN	- All orientations - Horizontal tracing possible
Corners/ tooth surfaces	010 2514*1		Rtip 5 μm , 60°conical diamond, 4 mN	- All orientations - Horizontal tracing possible
Deep grooves/ round grooves	010 2515*1		Rtip 5 μm , 90°conical diamond, 5 mN	- Downward measurement - Large waveform distortion
Gear tooth profiles, thread flank	010 2518*2		Rtip 5 μm , 90°conical diamond, 4 mN	Magnification: x10000
Fine long holes	010 2521		Rtip 5 μm , 90°conical diamond, 5 mN	- Downward measurement - Sensitivity: 1/2 - Magnification: x5000 - Large waveform distortion
Low magnification, long holes	010 2522*1		Rtip 5 μm , 90°conical diamond, 5 mN	- Downward measurement - Sensitivity: 1/2 - Magnification: x20000
Low magnification, corners	010 2524		Rtip 5 μm , 60°conical diamond, 5 mN	- Downward measurement - Sensitivity: 1/2 - Magnification: x20000
Deep groove corners	010 2527		Rtip 5 μm , 60°conical diamond, 8 mN	- Downward measurement - Sensitivity: 1/2 - Magnification: x10000 - Large waveform distortion
Deep hole grooves, O-ring groove bottom surfaces	DM43271*3		Rtip 5 μm , 90°conical diamond, 5.5 mN	- Downward measurement - Sensitivity: 1/2 - Magnification: x20000
Extra deep grooves	DM43255*3		Rtip 5 μm , 90°conical diamond, 6 mN	- Downward measurement - Sensitivity: 1/2 - Magnification: x10000 - Large waveform distortion

*1: The value of measuring force is when E-DT-S01A-B/E-DT-SE18A-B/E-DT-SS08A-B are mounted

*2: Cannot be used with E-DT-SS01A-B/E-DT-S03A-B/E-DT-SE19A-B/E-DT-SSE01A







*3: The value of measuring force is when E-DT-S01A-B/E-DT-SE18A-B/E-DT-SS08A-B are mounted.

Standard Inventory Parts

SURFCOM-CONTOURRECORD
Option

Replaceable Roughness Profile Measuring Stylus

Applicable models ■ S-TOUCH50 ■ S-TOUCH550 ■ FLEX-50 ■ S130 ■ S1400 ■ S1500 ■ S1900 ■ S1910 ■ S480 ■ S1800 ■ S2800 ■ S2900 ■ S-NEX **1 DX2/SD2 ■ S-NEX**1

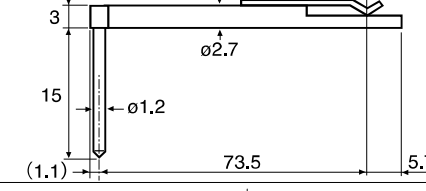

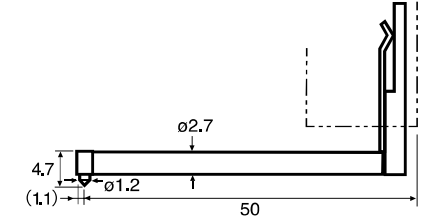


Measuring application	Model	External view	Specifications	Remarks
Soft materials 	010 2508		Rtip 10 µm, 90°conical diamond, 0.75 mN	- All orientations - Horizontal tracing possible - Specifications are for when E-DT-S02A-B is mounted
Deep hole grooves, bottom surface of Oring groove 	010 2525		Rtip 10 µm, 90°conical diamond, 5.5 mN	- Downward measurements - Sensitivity: 1/2 - Magnification: x20000 - Large waveform distortion
Extra deep grooves 	010 2526		Rtip 10 µm, 90°conical diamond, 8 mN	- Downward measurements - Sensitivity: 1/2 - Magnification: x5000 - Large waveform distortion
Bottom surface of holes 	010 2541		Rtip 5 µm, 90°conical diamond, 8 mN	- Magnification: x5000 - Large waveform distortion - Dedicated connecting rod used
High magnification measurement 	010 2506		Rtip 1 µm, 60°conical diamond, 0.75 mN	- All orientations - Horizontal tracing possible - Specifications are for when E-DT-S04A-B is mounted.
High magnification contour profiles 	010 2528		Rtip 1 µm, 60°conical diamond, 8 mN	- Downward measurements - Sensitivity: 1/2 - Magnification: x10000 - For E-DT-S01A-B, -S03A-B

*The value of measuring force is when E-DT-S01A-B/E-DT-SE18A-B are mounted

Standard Inventory Parts

Replaceable Waviness Profile Measuring Stylus

Applicable models ■ S-TOUCH50 ■ S-TOUCH550 ■ FLEX-50 ■ S130 ■ S1400 ■ S1500 ■ S1900 ■ S1910 ■ S480 ■ S1800 ■ S2800 ■ S2900 ■ S-NEX **1 DX2/SD2 ■ S-NEX**1

Measuring application	Model	External view	Specifications	Remarks
Steps 	010 2504		Rtip 250 µm, 60°conical sapphire, 5 mN	All orientations
Waviness 	010 2505		Φ 1.6, ruby, 4 mN	All orientations
Extra fine hole profiles 	010 2510		Φ 0.5, tool steel, 4 mN	- All orientations - Magnification: x5000 - Excluding E-DT-S03A-B/-SS01A-B/SE19A-B
Fine long hole waviness 	010 2520		Φ 1.6, ruby, 5 mN	- Downward measuring - Sensitivity: 1/2 - Magnification: x10000
Large steps 	010 2523		Rtip 250 µm, sapphire, 5 mN	- Downward measuring - Sensitivity: 1/2 - Magnification: x25000

*The value of measuring force is when E-DT-S01A-B/E-DT-SE18A-B are mounted

Standard Inventory Parts