Specifications


General Specifications

Physical specifications:


Max operating depth:	0 to 3000 m *(Limited by hydrophone depth rating)*
Weight in air:	54 kg (119 lb)
Weight in water:	28 kg (62 lb)
Diameter:	590 mm (23 in)
Height:	196 mm (8.5 in)

Endurance capabilities:

Recording capability:	90 days @ 4 ms (dual recording) 90 days @ 2 ms There is a capability to delay start of recording to a specific date and time in order to conserve storage capacity
Battery capability:	40 to 90 days battery life, depending on battery choice (Alkaline or Lithium)
Recording bandwidth:	4 ms - DC to 100 Hz 2 ms - DC to 200 Hz 1 ms – DC to 400 Hz
Recorder sensitivity:	Full-scale velocity eq. 0.02 m/s peak Full-scale pressure eq. 0.6 bar (6 E+10 µPa) peak LSB velocity eq. 9 E-12 m/s peak LSB pressure eq. 2.8 E-10 bar (28 µPa) peak
Resolution:	23 - 31 bits + sign
System noise:	<-166 dB re. full scale, @ 2 ms

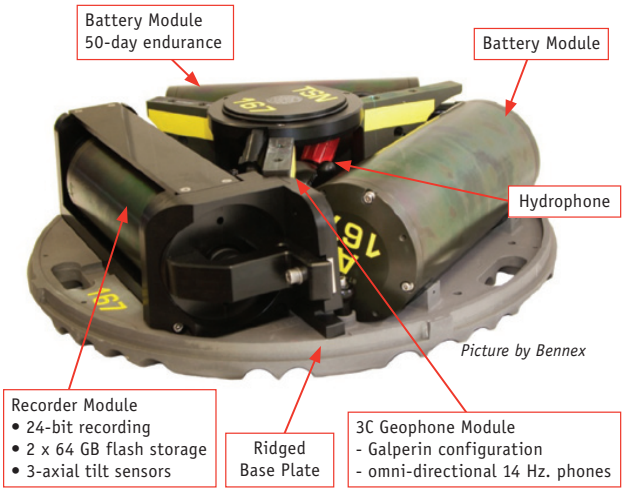

Picture by Bennex

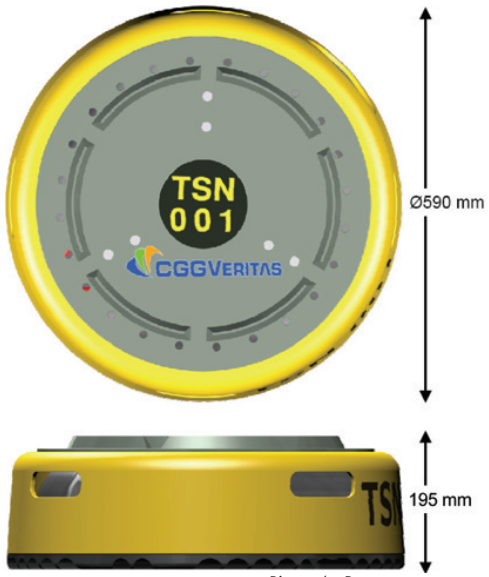

Picture by Bennex

Time synchronization: GPS-derived time pulse

Clock stability: Long-term stability (uncorrected)
± 5 E-08 or 1.5 s per year

Typical stability observed (uncorrected)
< ± 2 E-08 or 0.6 s per year (0.02 ppm)

Typical drift:

Operation	Uncorrected drift	Drift after linear correction
15 days	26 ms	1.3 ms
30 days	52 ms	2.6 ms
60 days	103 ms	5.2 ms
90 days	155 ms	7.8 ms

Sensor specifications:

Geophones:	3 x sensor SM-6 O/B 14 Hz 375 ohm 14 Hz omni-tilt, in Galperin configuration Damping 0.70 Damped sensitivity 15.6 V/m/s
Hydrophone:	HTI 96-MIN Capacitance 10 nF Sensitivity 8.9 V/bar Corner frequency -3 dB @ 5.3 Hz