


Configuration of

Standard Access List

AIM: Configuration of Standard Access List in Cisco Packet Tracer [To block PC0(10.0.0.2), PC1(10.0.0.3) and the network (12.0.0.0) from accessing the network 11.0.0.0]

Network Topology

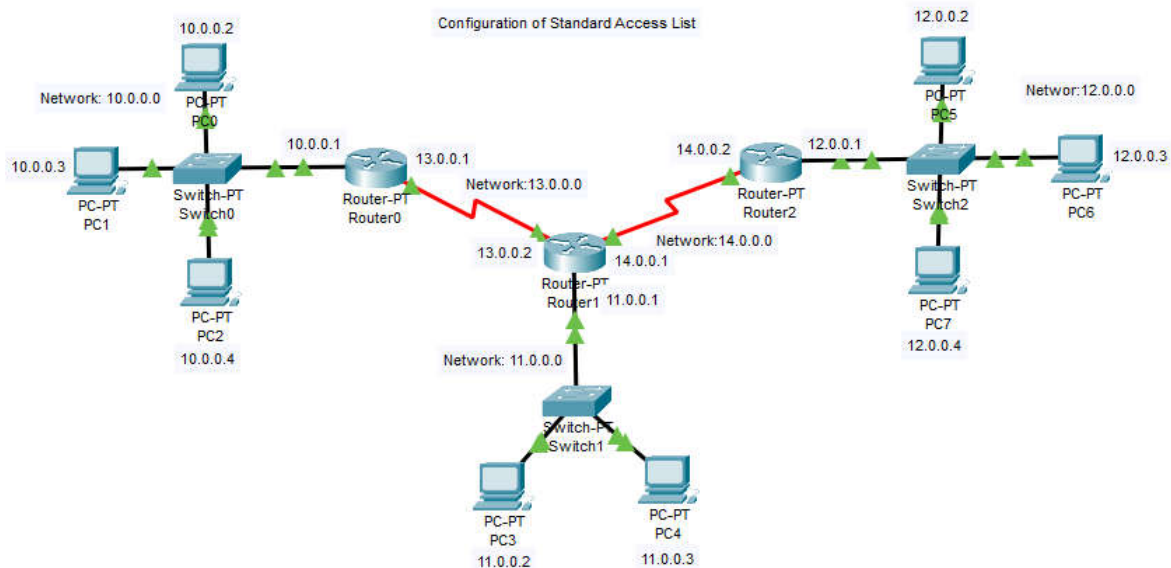

Configuration for PCs

<u>PC0</u> IP Address: 10.0.0.2 Subnet Mask: 255.0.0.0 Default Gateway: 10.0.0.1	<u>PC1</u> IP Address: 10.0.0.3 Subnet Mask: 255.0.0.0 Default Gateway: 10.0.0.1	<u>PC2</u> IP Address: 10.0.0.4 Subnet Mask: 255.0.0.0 Default Gateway: 10.0.0.1
<u>PC3</u> IP Address: 11.0.0.2 Subnet Mask: 255.0.0.0 Default Gateway: 11.0.0.1	<u>PC4</u> IP Address: 11.0.0.3 Subnet Mask: 255.0.0.0 Default Gateway: 11.0.0.1	
<u>PC5</u> IP Address: 12.0.0.2 Subnet Mask: 255.0.0.0 Default Gateway: 12.0.0.1	<u>PC6</u> IP Address: 12.0.0.3 Subnet Mask: 255.0.0.0 Default Gateway: 12.0.0.1	<u>PC7</u> IP Address: 12.0.0.4 Subnet Mask: 255.0.0.0 Default Gateway: 12.0.0.1

Configuration for Routers

Fast Ethernet Port Configuration

Router0

```
Router>en
Router#hostname R1
R1#config t
R1(config)# int f0/0
R1(config-if)# ip address 10.0.0.1 255.0.0.0
R1(config-if)# no shut
```

Router1

```
Router>en
Router#hostname R2
R2#config t
R2(config)# int f0/0
R2(config-if)# ip address 11.0.0.1 255.0.0.0
R2(config-if)# no shut
```

Router2

```
Router>en
Router#hostname R3
R2#config t
R2(config)# int f0/0
R2(config-if)# ip address 12.0.0.1 255.0.0.0
R2(config-if)# no shut
```

<u>Serial Port Configuration</u>		
<u>Router0</u> R1#config t R1(config)# int s2/0 R1(config-if)# ip address 13.0.0.1 255.0.0.0 R1(config-if)# no shut	<u>Router1</u> R2#config t R2(config)# int s2/0 R2(config-if)# ip address 13.0.0.2 255.0.0.0 R2(config-if)# no shut R2(config-if)# exit R2(config)# int s3/0 R2(config-if)# ip address 14.0.0.1 255.0.0.0 R2(config-if)# no shut	<u>Router2</u> R2#config t R2(config)# int s2/0 R2(config-if)# ip address 14.0.0.2 255.0.0.0 R2(config-if)# no shut
<u>Routing Protocol Configuration</u>		
<u>Router0</u> R1#config t R1(config)# router rip R1(config-router)# network 10.0.0.0 R1(config-router)# network 13.0.0.0	<u>Router1</u> R2#config t R2(config)# router rip R2(config-router)# network 11.0.0.0 R2(config-router)# network 13.0.0.0 R2(config-router)# network 14.0.0.0	<u>Router2</u> R2#config t R2(config)# router rip R2(config-router)# network 12.0.0.0 R2(config-router)# network 14.0.0.0
<u>Standard Access List Configuration</u>		
<u>Router1</u> R1#config t R1(config)# access-list 10 deny 10.0.0.2 0.0.0.0 R1(config)# access-list 10 deny host 10.0.0.3 R1(config)# access-list 10 deny 12.0.0.0 0.0.0.255 R1(config)# access-list 10 permit any R1(config)# int f0/0 R1(config-if)# ip access-group 10 out		

Output

To check whether the standard access list is working properly or not, we ping the PC3(11.0.0.2) from the PC0 (10.0.0.2) which had been blocked and we get the following result.

Pinging from 10.0.0.2(PC0)

```
C:\>ping 11.0.0.2

Pinging 11.0.0.2 with 32 bytes of data:

Reply from 13.0.0.2: Destination host unreachable.
Reply from 13.0.0.2: Destination host unreachable.
Reply from 13.0.0.2: Destination host unreachable.
Reply from 13.0.0.2: Destination host unreachable.

Ping statistics for 11.0.0.2:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),
```

Pinging from 10.0.0.2(PC2)

Again we ping the PC3(11.0.0.2) from the PC2 (10.0.0.4) which had not been blocked and we get the following result.

```
C:\>ping 11.0.0.2

Pinging 11.0.0.2 with 32 bytes of data:

Reply from 11.0.0.2: bytes=32 time=1ms TTL=126
Reply from 11.0.0.2: bytes=32 time=12ms TTL=126
Reply from 11.0.0.2: bytes=32 time=4ms TTL=126
Reply from 11.0.0.2: bytes=32 time=13ms TTL=126

Ping statistics for 11.0.0.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 13ms, Average = 7ms
```

Pinging from 12.0.0.3(PC6)

Again we ping the PC3(11.0.0.2) from the PC5 (12.0.0.2) which had been blocked and we get the following result.

```
C:\>ping 11.0.0.2

Pinging 11.0.0.2 with 32 bytes of data:

Reply from 14.0.0.1: Destination host unreachable.
Reply from 14.0.0.1: Destination host unreachable.
Reply from 14.0.0.1: Destination host unreachable.
Reply from 14.0.0.1: Destination host unreachable.

Ping statistics for 11.0.0.2:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),
```

The above results shows that the Standard Access List had been configured properly.