Bohle

www.bohle-group.com

Bohle SlideTec optima 60
Sliding Door System

Sliding Door System Bohle SlideTec optima 60

The Bohle sliding door hardware system SlideTec Optima 60 is a high quality solution for moving glass doors of up to 60kg. Pre-drilling the glass for tempered glass applications is not necessary due to the smart clamping technology, which is used for equipping SlideTec Optima 60 with an optional damping mechanism. A development to this system is the fact that the damping mechanims can beused both in opening and closing directions.

▶ SlideTec optima 60 Ceiling mounting single door

Further track lengths on request · GH = Glass Height · LW = Clear Width · LH = Clear Height · GB = Glass Width · L = Length of running track

ⓘ Mounting: Ceiling mounting · Version single door · Door weight max. 60 kg · Glass thickness tempered glass 8 + 10 mm · Glass processing not required · Material: Aluminium

Included in delivery:
2 items Roller units incl. clamps
2 items Stopper
1 item Running track ceiling mounting incl. cover
1 item Bottom guide channel

Art. No.	Length · Finish
BO 5101501	2000 mm · Aluminium EV1
BO 5101503	2500 mm · Aluminium EV1
BO 5101505	3000 mm · Aluminium EV1
BO 5101507	2000 mm · stainless steel look
BO 5101509	2500 mm · stainless steel look
BO 5101511	3000 mm · stainless steel look

▶ SlideTec optima 60 Wall mounting single door

Further track lengths on request · BH = Drilling Height · GH = Glass Height · LW = Clear Width · LH = Clear Height · GB = Glass Width · L = Length of running track

ⓘ Mounting: Wall mounting · Version single door · Door weight max. 60 kg · Glass thickness tempered glass 8 + 10 mm · Glass processing not required · Material: Aluminium

Included in delivery:
2 items Roller units incl. clamps
2 items Stopper
1 item Running track wall mounting incl. cover
1 item Bottom guide channel

Art. No.	Length · Finish
BO 5101502	2000 mm · Aluminium EV1
BO 5101504	2500 mm · Aluminium EV1
BO 5101506	3000 mm · Aluminium EV1
BO 5101508	2000 mm · stainless steel look
BO 5101510	2500 mm · stainless steel look
BO 5101512	3000 mm · stainless steel look

▶ SlideTec optima 60 Ceiling mounting with fixed glazing

Further track lengths on request · GH = Glass Height · LW = Clear Width · LH = Clear Height · GB = Glass Width · L = Length of running track · S = Lateral Part · U = U Cover

ⓘ Mounting: Ceiling mounting · Version single door with fixed glazing · Door weight max. 60 kg · Glass thickness tempered glass 8 + 10 mm · Glass processing not required · Material: Aluminium

Included in delivery:
2 items Roller units incl. clamps
2 items Stopper
1 item Running track ceiling mounting incl. cover
1 item Cover profile and wedge
1 item Bottom guide channel

Art. No.	Length · Finish
BO 5101513	2000 mm · Aluminium EV1
BO 5101514	2500 mm · Aluminium EV1
BO 5101515	3000 mm · Aluminium EV1
BO 5101516	2000 mm · stainless steel look
BO 5101517	2500 mm · stainless steel look
BO 5101518	3000 mm · stainless steel look

▶ SlideTec optima 60 Ceiling mounting with damping mechanism

Further track lengths on request · GH = Glass Height · LW = Clear Width · LH = Clear Height · GB = Glass Width · L = Length of running track

ⓘ Mounting: Ceiling mounting · Version single door · Door weight max. 60 kg · Glass thickness tempered glass 8 + 10 mm · Material: Aluminium

Included in delivery:
2 items Roller units incl. clamps
2 items Stopper
1 item Running track ceiling mounting incl. cover
1 item Bottom guide channel
1 item Einzugsdämpfung doppelseitig in Öffnungs- und Schließrichtung

Art. No.	Length · Finish
BO 5101521	2000 mm · Aluminium EV1
BO 5101523	2500 mm · Aluminium EV1
BO 5101525	3000 mm · Aluminium EV1
BO 5101527	2000 mm · stainless steel look
BO 5101529	2500 mm · stainless steel look
BO 5101531	3000 mm · stainless steel look

▶ SlideTec optima 60 Wall mounting with damping mechanism

Further track lengths on request · BH = Drilling Height · GH = Glass Height · LW = Clear Width · LH = Clear Height · GB = Glass Width · L = Length of running track

ⓘ Mounting: Wall mounting · Version single door · Door weight max. 60 kg · Glass thickness tempered glass 8 + 10 mm · Material: Aluminium

Included in delivery:
2 items Roller units incl. clamps
2 items Stopper
1 item Running track wall mounting incl. cover
1 item Bottom guide channel
1 item Einzugsdämpfung doppelseitig in Öffnungs- und Schließrichtung

Art. No.	Length · Finish
BO 5101522	2000 mm · Aluminium EV1
BO 5101524	2500 mm · Aluminium EV1
BO 5101526	3000 mm · Aluminium EV1
BO 5101528	2000 mm · stainless steel look
BO 5101530	2500 mm · stainless steel look
BO 5101532	3000 mm · stainless steel look

▶ SlideTec optima 60 Ceiling mounting with fixed glazing with damping mechanism

Further track lengths on request · GH = Glass Height · LW = Clear Width · LH = Clear Height · GB = Glass Width · L = Length of running track · S = Lateral Part · U = U Cover
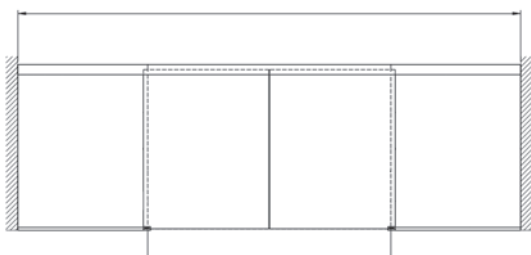
ⓘ Mounting: Ceiling mounting · Version single door with fixed glazing · Door weight max. 60 kg · Glass thickness tempered glass 8 + 10 mm · Material: Aluminium

Included in delivery:
2 items Roller units incl. clamps
2 items Stopper
1 item Running track ceiling mounting incl. cover
1 item Cover profile and wedge
1 item Bottom guide channel
1 item Einzugsdämpfung doppelseitig in Öffnungs- und Schließrichtung

Art. No.	Length · Finish
BO 5101533	2000 mm · Aluminium EV1
BO 5101534	2500 mm · Aluminium EV1
BO 5101535	3000 mm · Aluminium EV1
BO 5101536	2000 mm · stainless steel look
BO 5101537	2500 mm · stainless steel look
BO 5101538	3000 mm · stainless steel look

▶ Supplementary set SlideTec optima 60

ⓘ Glass thickness tempered glass8 + 10 mm · Material: Aluminium

Included in delivery:
2 items
2 items
1 item

Art. No.	Finish
BO 5101541	EV1
BO 5101542	stainless steel look

▶ Cover without fixed glazing

ⓘ Material: Aluminium

Art. No.	Finish
BO 5101543	EV1
BO 5101544	stainless steel look

▶ Cover with fixed glazing

ⓘ Material: Aluminium

Art. No.	Finish
BO 5101545	EV1
BO 5101546	stainless steel look