





8010JC

BILOBA®



- Hydraulic hinge with adjustment of the closing speed of the door and **zero point adjustability**. Inner body is anodized with the special deep oxidation (20 micron) and cover made of stainless steel AISI 316. Stop at 0° +90° -90°.

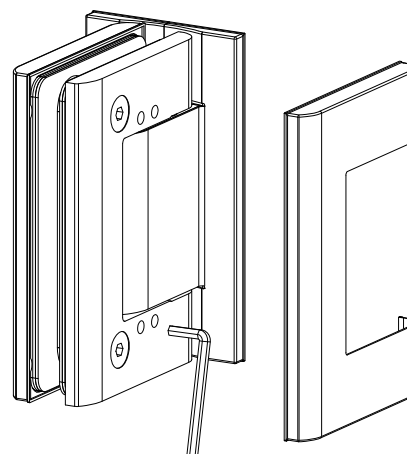





CAUTION VIOLENT OPENING FURTHER THAN 95° COULD UNHINGE THE DOOR. WE SUGGEST TO INSTALL A DOOR STOP

AVAILABLE IN FURTHER VERSION WITHOUT 90° STOP. It have to be specified on being ordered and could be subjected to minimum quantity order. For further information, please contact the export department.


Classificazione secondo normativa - Clasificación según la ley - Classification according to the law
Klassifizierung nach den Vorschriften



art. 8010JC UNI EN 1154:2006 3 8 2 0 1 4

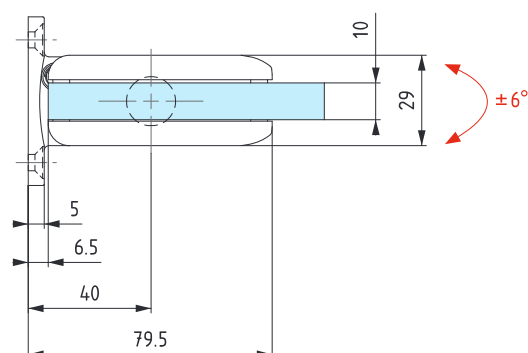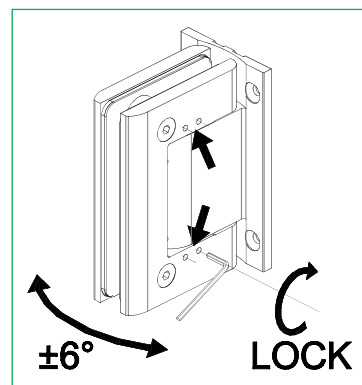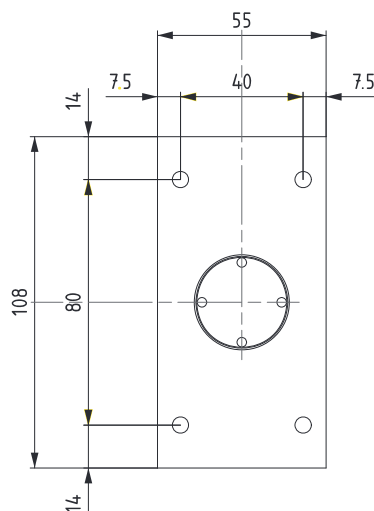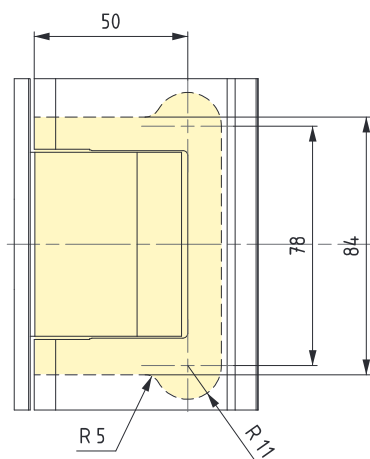

Adjustment valve for the door's closing speed



TESTED FOR 1,000,000 CYCLES.