

MAX-A-FILL

Rubberized Cold-Applied Pourable Asphalt Crack Filler



DESCRIPTION

MAX-A-FILL is ready to use, fast curing, fortified asphalt emulsion crack filler with latex and fillers. **MAX-A-FILL** is used as a self leveling, cold pourable joint sealant in bituminous and concrete surfaces, which are up to 1" in width and 1/2" in depth.

Max-A-Fill is ideal for filling cracks in roads, pavements, driveways, parking lots, and other asphalt and concrete surfaces against water penetration and damaging freeze-thaw damage

FEATURES / BENEFITS

- Ready to use/Fast curing
- Application Temperature Range: Surface and Air 45° F minimum
- Coverage 80 LF/gal for 1/2" x 1/2" crack
- Greater than 50% solids
- Also available in "Trowel-Grade" for large cracks

SPECIFICATIONS/COMPLIANCES

Complies with all Federal, State and regional VOC regulations. SCAQMD, OTC and LADCO compliant.

Contains 0 VOC's and 0 petroleum distillates

Meets many DOT requirements for asphalt crack filler

APPLICATION

MAX-A-FILL must be mixed well before use. Make sure, prior to application, that cracks are free from all foreign matter and debris.

The material should be kept dry until it is fully cured. The material is ready to use and can be poured directly from the container into the crack being filled.

Clean-Up

Use soap and water for personal clean up, preferable before the material dries. Use **SpecChem Orange Peel** to clean tools and equipment and as a general asphalt cleaner/remover for all **Max-A-Guard Products**.

PACKAGING

1 gallon (3.8 L) (4 bottles per case)
Also available in 5 gal pails



SHELF LIFE / STORAGE

Do Not Allow to Freeze

Properly store, shelf-life is one year from date of manufacture.

COVERAGE

Approximate coverage per gallon is 80 LF for cracks 1/2" wide by 1/2" deep.

LIMITATIONS / PRECAUTIONS

Do not allow material to freeze.

WARRANTY

NOTICE-READ CAREFULLY CONDITIONS OF SALE

SpecChem offers this product for sale subject to and limited by the warranty which may only be varied by written agreement of a duly authorized corporate officer of SpecChem. No other representative of or for SpecChem is authorized to grant any warranty or to waive limitation of liability set forth below.

WARRANTY LIMITATION

SpecChem warrants this product to be free of manufacturing defects. If the product when purchased was defective and was within use period indicated on container or carton, when used, SpecChem will replace the defective product with new product without charge to the purchaser. SpecChem makes no other warranty, either expressed or implied, concerning this product. There is no warranty of merchantability. NO CLAIM OF ANY KIND SHALL BE GREATER THAN THE PURCHASE PRICE OF THE PRODUCT IN RESPECT OF WHICH DAMAGES ARE CLAIMED.

INHERENT RISK


Purchaser assumes all risk associated with the use or application of the product.

TECHNICAL SERVICES

For assistance, contact technical services at:
866-791-8700 816-968-5600
www.specchemllc.com



1511 Baltimore Ave, Suite 600
Kansas City, MO 64108
www.specchemllc.com 866.791.8700

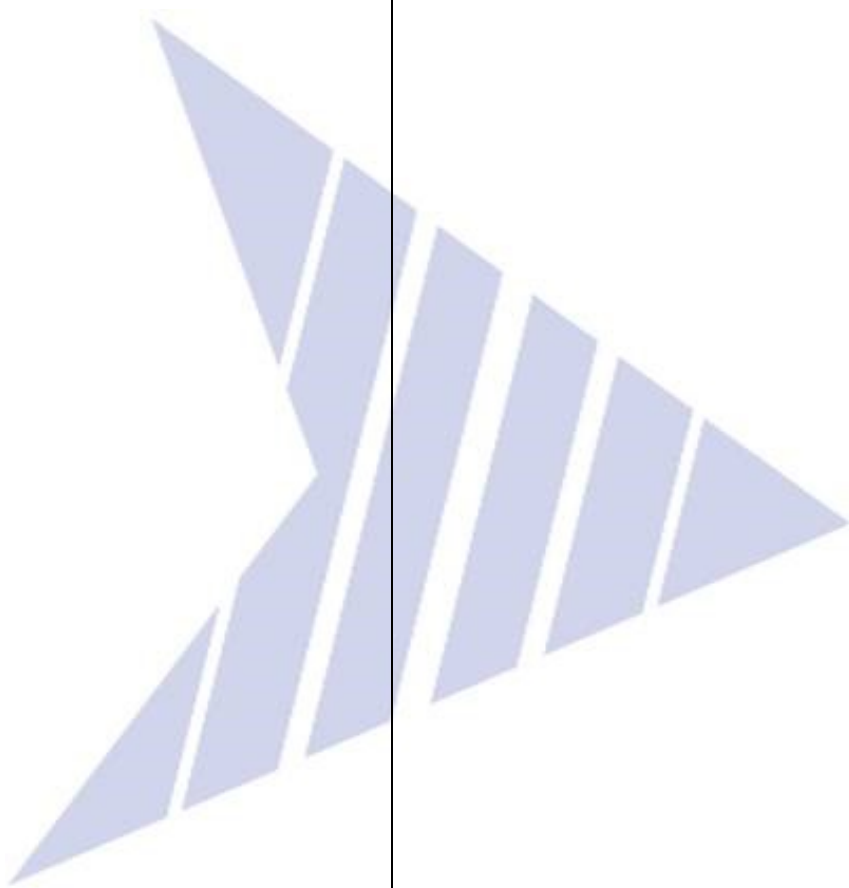

1511 Baltimore Ave, Suite 600
Kansas City, MO 64108
www.specchemllc.com 866.791.8700