TL; DR

TODO:

### 0.1 Structure

- EffectableComponents are ActorComponents that allow for delegation (effects). They have predefined places called "Outlets" that allow for code modification. Think of Outlets like electrical outlets waiting to be plugged into.
  - Let's use StatsComponent as an example. Say we want a Pokémon-style "Adamant" nature (+10% PhA/-10%SpA). One such place for modification is in the function RecalculateStats. TODO: Update picture!


```
pvoid UStatsComponent::RecalculateStats(const bool bResetCurrent)
{
    for(FStat* Stat : StatsArray)
    {
        ExecuteBeforeRecalculateStats(Stat, bResetCurrent);
        Stat->Update(GetLevel(), bResetCurrent);
        ExecuteAfterRecalculateStats(Stat, bResetCurrent);
    }
}
```

- Outlet arrays are variables inside of EffectableComponents. They hold Outlets whose delegates execute when needed.
  - TODO: Update this! Let's use StatsComponent's AfterRecalculateStatsArray in our example. In this case, after stats are recalculated (say, on level-up), the base PhA would increase by 10% and the base SpA would decrease by 10% (additively):

• EffectComponents are ActorComponents that plug into Outlets. These come in many forms, but an easy example is a Buff. TODO: Describe how this happens with pictures!

# 0.2 EffectComponent Inheritance

The base classes inherit as:

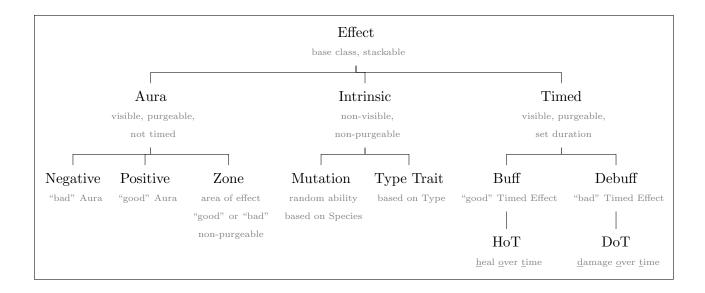

#### Some notes:

- Only the base names have been used. That is, the actual names may be UTimedEffectComponent\_BaseClass instead of simply "Timed".
- "Purgeable" means it is possible to reduce the stacks of the UEffectComponent down to zero (detachment of UEffectComponent).
- All UEffectComponents are "silenceable", meaning their effects can be nullified (but not detached or reduced in stacks).

### 0.3 List of EffectableComponents and Outlets

The following tables show all implemented EffectableComponents and their delegate arrays. Note the "base name" indicates existence of "Before" and "After" versions of:

- 1. the delegate signatures, FBeforeBaseNameSignature;
- 2. the delegate wrappers, FBeforeBaseNameDelegate, which are necessary since TArrays cannot contain delegates;
- 3. the private arrays of delegate wrappers, TArray<FBeforeBaseNameOutlet> BeforeDelegates;
- 4. a function to execute the arrays, ExecuteBeforeBaseName; and
- 5. AddBeforeBaseName, a function to add an Outlet to the private array BeforeDelegates (which also puts it in the right order based on priority).

Note that the philosophy applies to what is *probable* rather than what is *possible*. Hence the list meant to be practical rather than exhaustive.

Table 1: Outlets for UAffinitiesComponent

GetUnspentPoints	
▶ Before	const uint8 OriginalPoints, uint8& ReturnedPoints
► After	const uint8 OriginalPoints, const uint8 ReturnedPoints

 ${\bf Table\ 1:\ Outlets\ for\ UAffinitiesComponent\ (Continued)}$ 

SetUnspentPoints	
► Before	<pre>const uint8 OriginalPoints, const uint8 InputPoints, uint8&amp; SetPoints</pre>
► After	const uint8 OriginalPoints, const uint8 InputPoints, const uint8 SetPoints

Table 2: Outlets for ULevelComponent

GetBaseExpYield	
► Before	<pre>const float OriginalYield, float&amp; ReturnedYield</pre>
► After	const float OriginalYield, const float ReturnedYield

GetCXP	
► Before	const uint32 OriginalCXP, int32& ReturnedCXP
Note:	ReturnedCXP is int32% instead of uint32% for Blueprint compatability.
► After	const uint32 OriginalCXP const int32 ReturnedCXP
Note:	ReturnedCXP is const int32 instead of const uint32 for Blueprint compatability.

 $\label{thm:continued} Table \ 2 \hbox{: Outlets for ULevelComponent (Continued)}$ 

GetExpYield	
► Before	<pre>const float OriginalYield, float&amp; ReturnedYield, const uint16 DefeatedLevel, const uint16 VictoriousLevel</pre>
Note:	"Defeated" and "Victorious" levels are provided for flexibility (e.g., in case you want to yield exp differently based on level difference, although technically you could always back-calculate the level difference based on the equation and OriginalYield).
► After	const float OriginalYied, const float ReturnedYield, const uint16 DefeatedLevel, const uint16 VictoriousLevel
Note:	"Defeated" and "Victorious" levels are provided for symmetry with respect to the Before delegate (since ReturnedValue is already calculated, I can't think of why you would need them, but you never know!).

GetMaxLeve	el .
► Before	const uint16 DefaultMax, int32& AttemptedMax
Note:	DefaultMax is defined in the code. It should normally be 100, but may change for certain subclasses (e.g., a UBossLevelComponent may have a max of 200 instead).  AttemptedMax is int32& instead of uint16& for Blueprint compatability.
► After	const uint16 DefaultMax const int32 ReturnedMax

 $\begin{tabular}{ll} Table 2: {\tt Outlets} for {\tt ULevelComponent} & (Continued) \\ \end{tabular}$ 

GetMinLevel	
► Before	const uint16 DefaultMin, int32% AttemptedMin
Note:	DefaultMin is defined in the code. It should normally be 1, but may change for certain subclasses (e.g., a UEggLevelComponent may have a min of 0 instead for whatever reason).  AttemptedMin is int32& instead of uint16& for Blueprint compatability.
► After	const uint16 DefaultMin const int32 ReturnedMin
Note:	ReturnedCXP is const int32 instead of const uint32 for Blueprint compatability.

GetBaseExpYield	
► Before	<pre>const float OriginalYield, float&amp; ReturnedYield</pre>
► After	const float OriginalYield, const float ReturnedYield

SetBaseExpYield	
► Before	<pre>const float OldYield, const float InputYield, float&amp; AttemptedYield</pre>
► After	const float OldYield const float InputYield, const float NewYield
Note:	<ul> <li>▷ OldYield is the yield prior to calling SetBaseExpYield,</li> <li>▷ InputYield is the original, unmodified input to SetBaseExpYield,</li> <li>▷ AttemptedYield is the modified value that will be used to set the base exp yield.</li> </ul>

 ${\bf Table\ 2:\ Outlets\ for\ ULevelComponent\ (Continued)}$ 

SetCXP	
► Before	const uint32 OldCXP, const int32 InputCXP, int32& AttemptedCXP
Note:	AttemptedCXP is int32& instead of uint32& for Blueprint compatability.
► After	const uint32 OldCXP const int32 InputCXP, const uint32 NewCXP
Note:	UStatsComponent subscribes to this in order to change stats on level change.  ▷ OldCXP is the cumulatie experience points prior to calling SetCXP,  ▷ InputCXP is the original, unmodified input to SetCXP,  ▷ AttemptedCXP is the modified value that will be used to set the cumulative experience points.

Table 3: Outlets for UStatsComponent

ModifyStat	
► Before	<pre>const EStatEnum TargetStat, const EStatValueType ValueType, const EModificationMode Mode, const float OriginalValue, float&amp; AttemptedValue</pre>
► After	<pre>const EStatEnum TargetStat, const EStatValueType ValueType, const EModificationMode Mode, const float OriginalValue, const float NewValue</pre>
Note:	All "ModifyStat" functions from UStatsComponent (such as ModifyStatsUniformly or RandomizeStats) go through ModifyStatInternal, which calls this Outlet.

Table 3: Outlets for UStatsComponent (Continued)


RandomizeStats	
► Before	const EStatEnum TargetStat, const FStatRandParams OriginalParams, FStatRandParams& ParamsToBeUsed
► After	const EStatEnum TargetStat, const FStatRandParams OriginalParams, const FStatRandParams UsedParams
Note:	The EStatEnum is not the acutal FStat. To get the FStat (such as FHealth), use UStatsComponent::GetStat(EStatEnum)

RecalculateStats	
► Before	<pre>const EStatEnum TargetStat, const bool bResetCurrent, const float OriginalCurrent, const float OriginalPermanent</pre>
► After	<pre>const EStatEnum TargetStat, const bool bResetCurrent, const float OriginalCurrent, const float OriginalPermanent</pre>

# 0.4 Making Your Own Outlet

As an example, let's use GetBaseExpYield. (You can imagine that this is an important Outlet for tweaking levelling curves.) Here's what to do:

- 1. Plan ahead. I would sincerely recommend you writing down what parameters your Outlet Before and After delegates take on paper. We go to a few files and it's easy to be inconsistent.
- 2. Go to the right directory. We want to place the Outlet inside of ULevelComponent, so we'll start with that directory. If yours doesn't contain an "Outlets" directory, create one and place your Outlet(s) there.
- 3. Copy + paste file. The easiest way is to copy + paste pre-existing Outlets. In this example, we'll copy + paste SetCXPOutlet.h and name the new file GetBaseExpYield.h.



Note: this includes both BeforeGetBaseExpYield and AfterGetBaseExpYield functionality. You don't have to make two different files!

- 4. **Replace old name.** Open the new file and you'll still see the base name "SetCXP" everywhere. The easiest way is to do a find+replace "SetCXP" → "GetBaseExpYield". This replaces everything from the .generated include to the delegate signatures. If you're curious, you can look more in-depth and replace instances one-by-one.
- 5. **Declare delegate signatures.** In this case, we want the Before delegate signature to take two arguments: the original, unmodified yield and the one that will be returned from the GetBaseExpYield function.

You should also set the After signature in the same manner. Note: yours might use more than two parameters or different parameter types. Modify accordingly.

6. **Module API.** Make sure your module API is correct. If not, you'll get mysterious errors about your dll.

```
* Since delegates can't fit in TArrays, we need to wrap the

*/
USTRUCT(Blueprintable)

Struct LEVELCOMPONENT_API FBeforeGetBaseExpYieldDelegate :

{
GENERATED_BODY()

public:
```

7. **Declare** Outlet **functions.** In order to be able to call ExecuteBefore on your Outlet, you need to tell it a few things. The figure below displays a few things in red you should look at:

```
DECLARE_OUTLET_FUNCTIONS_TwoParams (Before, FBeforeGetBaseExpYieldDelegate, BeforeDelegates, Delegate, const float, float&);
```

• Whether it's a Before or After type Outlet. This affects execution based on priority:

#### **Priorities**

The lower the priority, the farther away it is from execution. If two priorities are tied, the older effect is executed first. Order is set externally by UEffectsComponent TODO: fact check this. Order:

- Intrinsic Before delegates (no UEffect affiliated)
- Before delegates:
  - \* Priority 1
  - \* Priority 2.a (older)
  - \* Priority 2.b (newer)
  - \* ...
- [Function executes]
- After delegates:
  - \* ...
  - \* Priority 2.b (newer)
  - \* Priority 2.a (older)
  - \* Priority 1
- Intrinsic After delegates (have the final say)

As an example, consider two delegates: one that says you can't take damage no matter what (call the UBuff "Invincible") and another that says damage against you can't be avoided no matter what (call the UDebuff "Weakened"). What happens when the target takes damage? Well, it depends on priority:

- They're probably subscribed to the Before delegate in UStatsComponent called ModifyStatOutlet with the target FStat being Health.
- Note that they're both Before delegates.
- Let's say Invincible has Priority 100 and Weakened has Priority 150.
   The result is the target takes damage because:
  - 1) Invincible first sets the damage to zero.
  - 2) Weakened then sets the damage to no less than its original value.
- If Weakened has lower Priority, the result is flipped and the target takes no damage.

- The parameters you defined in the delegate's signature. I know, I know—anytime you repeat code, you're probably doing something wrong. The biggest issue here is the UHT. The main (but not only) issue is that you can't have UPROPERTYs inside macros or the property won't register. If you have a better way of automating this, tell me!
- Don't forget the After variant's delegates, which should probably be const.
- 8. Check number of parameters. I make a point of this because I find it's my most common error. Make sure your declared signature and declared Outlet function macros have the correct number of params (two in our case). Explicitly, you might need to use DECLARE\_DYNAMIC\_DELEGATE\_FourParams(...).
- 9. **Declare** UPROPERTY. Inside the UEffectableComponent (in this example, ULevelComponent), declare the Outlet as a variable. Note that it's custom to have this UPROPERTY as public and in the "Outlets" category. It's also a good idea to comment the UPROPERTY with the parameters.

Note: I use Rider, so it imports #includes automatically. Make sure yours does, too.

10. **Implement.** Now it's time to place your Outlet in the appropriate place(s). For our example, it's pretty simple: place it inside of GetBaseExpYield in ULevelComponent's .cpp file.

Note that you might have to do things like cache original values.

11. A note on complementary delegates. If you create a Before Outlet, you should also create an After Outlet. The biggest difference might be the delegate signature (e.g., reference "&" to const).

An example where this would be necessary is an animation delegate. You only want to fire a "bonus exp" animation *after* the amount of exp has been determined, checked, and is now constant.

In some cases, it may not be necessary to have both Before and After delegates in a function. If you want only one delegate type, or three, or ten, the system is flexible enough to handle it. However, it's recommended to K.I.S.S.

## 0.5 Making Your Own Effects

Suppose you want to make your own effect from scratch. TODO: todo