B

ESP32 BUZZER SYSTEM

Buzzer Display

User Manual

A short guide to connect the display and run a buzzer round.

Connect Join the ESP32 Wi-Fi network before opening the display.	**Display** See a clear green connection status when ready.	**Reset** Press Enter after each buzzer result.

About This Manual

This short manual explains how to connect and operate the ESP32 Buzzer Display Client. It is intended for the person running the display during a quiz or buzzer round.

Quick Reference

Item	Default or action
ESP32 Wi-Fi password	**12345678**
Default ESP32 address	192.168.4.1
TCP port	80
Reset display	Press Enter
Leave full-screen	Press Esc

Getting Connected


1. Power on the ESP32, then connect the display computer to its Wi-Fi network using the password above.
2. Open the Buzzer Display application. Check that the IP is **192.168.4.1** and the port is **80**.
3. Select **Connect**.
4. The connection is ready when the status turns green and the button changes to **Disconnect**.

If connection fails


Confirm that the computer is still on the ESP32 Wi-Fi, then recheck the IP address and port before selecting Connect again.

Connection Status

The application shows the connection state at the bottom of the screen.

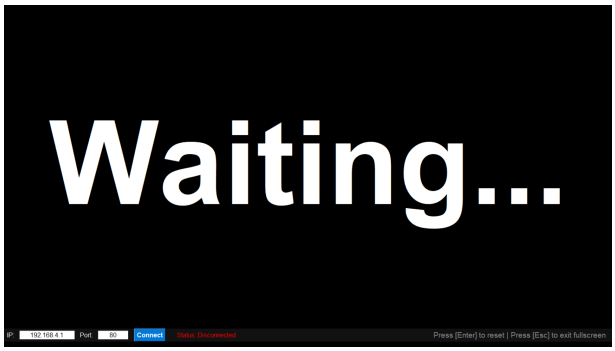

Before connecting
The red status reads **Disconnected**.

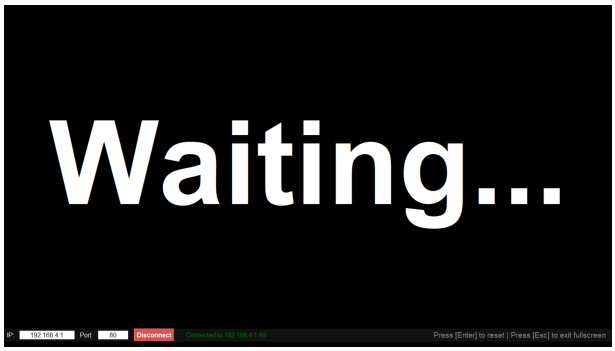

After connecting
The green status confirms the display is connected.

Showing a Buzzer Result

When a participant presses a buzzer, their number appears in large yellow text. The result remains on screen until it is reset.



Operator Controls

Control	What it does
Enter	Clears the current buzzer number and returns the display to Waiting.
Esc	Leaves full-screen mode. The application remains open.
Disconnect	Closes the connection and changes the button back to Connect.

Quick Troubleshooting

Problem	Action
Connection fails	Reconnect to the ESP32 Wi-Fi and confirm 192.168.4.1 with port 80.
Status changes to Disconnected	Check ESP32 power and Wi-Fi, then select Connect again.
Number will not change	Press Enter to reset the current result before the next round.

Event Day Checklist

1. Power on the ESP32 and the display computer.
2. Connect the computer to the ESP32 Wi-Fi network.
3. Open the display and select Connect.
4. Verify the green connected status before starting the round.
5. Press Enter after each result so the next buzzer can be displayed.