

# TIMMY®

Biometrics Identification  
SINCE 2000



## PROFESSIONAL BIOMETRIC RECOGNITION AND SOLUTIONS SUPPLIER

- ◇ Access Control Systems
- ◇ Attendance Management Systems
- ◇ Multi-Location Attendance Solution On Cloud



Face ID



Fingerprint



PIN



CARD



QR Code



Combination



FC CE RoSH



National High-tech  
Enterprise

[www.sztimmy.net](http://www.sztimmy.net)



Shenzhen Union Timmy Technology Co., Ltd, established in 2000, is a professional manufacturer engaged in the R&D of different biometric solutions, and Dedicated to the manufacturing and selling of Fingerprint&Face Recognition time attendance, Fingerprint&Face Recognition access control over the past 20 years.

Our factory covers an area of 2,500 square meters with around 100 employees. So far we have obtained the verified certificates of ISO9001, CE, FCC, ROHS, etc., and achieved the Chinese highest manufacturing honor as " National High tech enterprises " in 2017 with more than 10 patents.

Our band " TIMMY " is well-known in Biometric attendance market of China, and then we formally decide to step out towards the world market in 2017. Each year we will participate in at least 7 overseas exhibitions and totally take one month or more time paying visit to our overseas clients in some countries, So far our products had already exported to over 70 countries and regions, such as Southeast Asia, Middle east, Europe, South Africa and North America.

We have strong capability of Hardware quality control and Multiple OEM software solution. our Sales and technical support are always available to deal with your consult and inquiry, We Commit that our Desktop and Cloud software are free as well as our device SDK that you can use to integrate with your existed system, Our firmware by far can support 18 types of Multi-languages.

You can cooperate with TIMMY in flexible ways, including OEM/ODM, or Brand sales, Project cooperation and Industry application joint development. Every year, More than one hundred clients from different countries will come to visit us. We treat every visitor with our honesty and sincerity, and hold the business belief of win-win cooperation.

It is sincerely welcomed the worldwide friends in the biometric field to visit us!




# Contents



**P/ 01**  
Solutions



**P/ 07**  
Authentication  
Certificate



**P/ 08**  
AI Dynamic Face  
Recognition Terminal



**P/ 12**  
Facial Recognition  
Terminal



**P/ 13**  
Access Control  
System




**P/ 14**  
Attendance  
Management System



**P/ 17**  
QR Code  
Scanner System



**P/ 18**  
WiFi Network,  
Mobile APP Access



**P/ 19**  
Proximity card  
time attendance



**P/ 20**  
Fingerprint  
Reader



**P/ 21**  
Economic Guard  
Tour System



**P/ 22**  
UHF Reader/  
writer



**P/ 23**  
Smart Biomtric  
Door Lock



**P/ 24**  
Card Access  
Control

# Solution



**2000**

Company founded and started the sales of time recorder

**2006**

Started developing fingerprint attendance machine

**2009**

Developed color screen series

**2012**

Developed the first standalone attendance machine

**2014**

Developed face recognition products

**2016**

Accelerated global market expansion and launched new products

**2018**

Obtained the national high tech enterprise certificate

**2019**

Developed Dynamic face recognition products

**2020**

Temperature measuring face recognition terminal

**2021-2023**

AI Face Recognition Series






# Biometric Access Control System






# Biometric Time Attendance System

— Support Multi Language

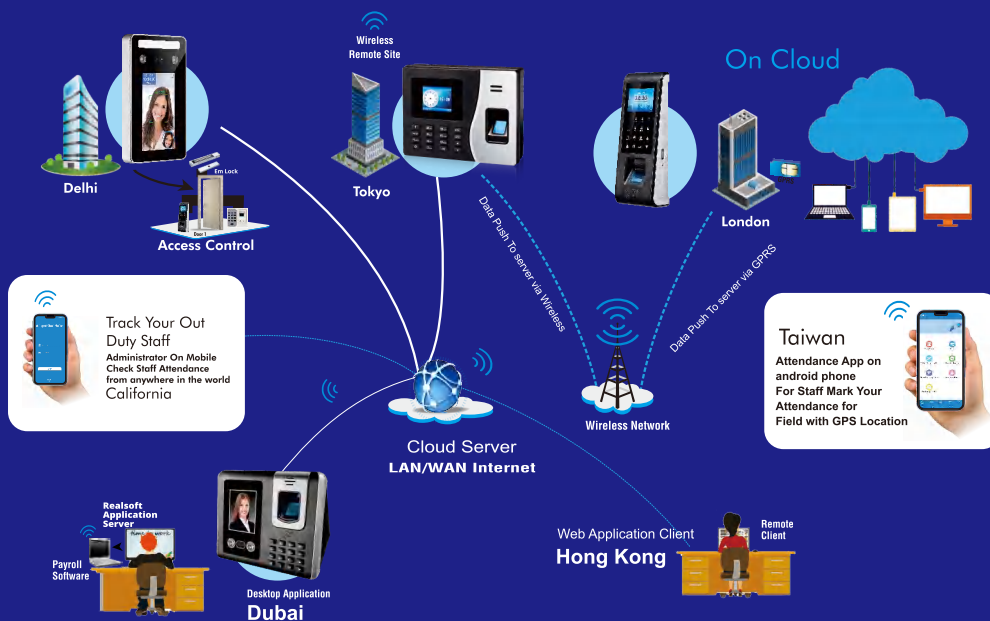

# Smart Attendance System Sending Notification To Mobile Phone

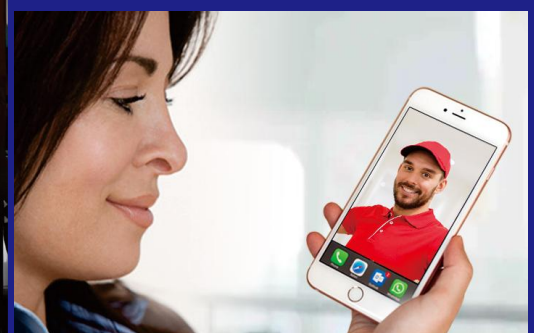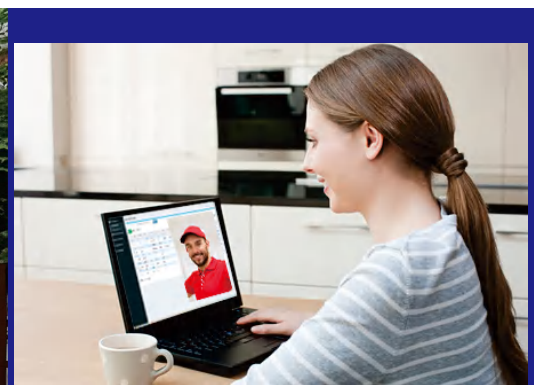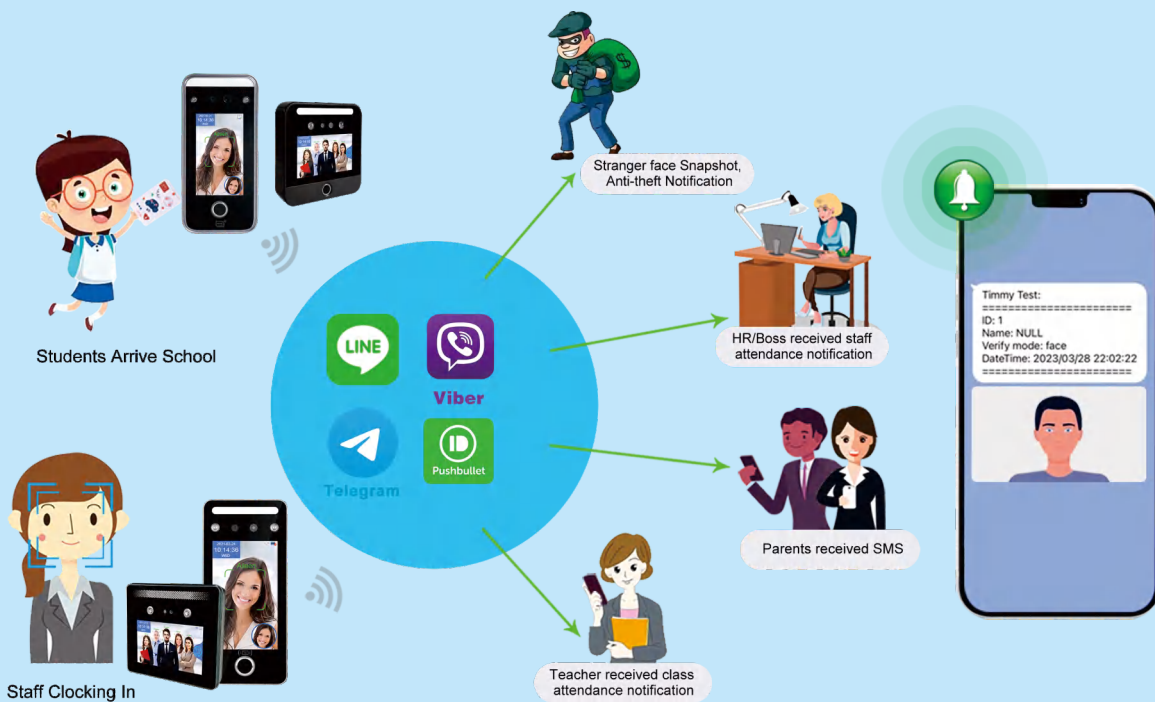

## Facial Recognition Video Intercom Access Control System



# Facial Recognition Elevator Control System



# QR Code Visitor Access Control System



# Multi-Tech Reading

EM, MIFARE, NFC, HID Prox, HID iCLASS, HID MIFARE, HID Prox/Indala, iso15693, DESFire, FELICA, NTAG210, NTAG213, NTAG215, NTAG216, MifareS50/S70, Utralight, FM1208, etc




# Intelligent Guard Tour System

To avoid some accidents caused by guards' dereliction of duty





# Four-Door Access Controller System (Integrating with Third-Party Devices)

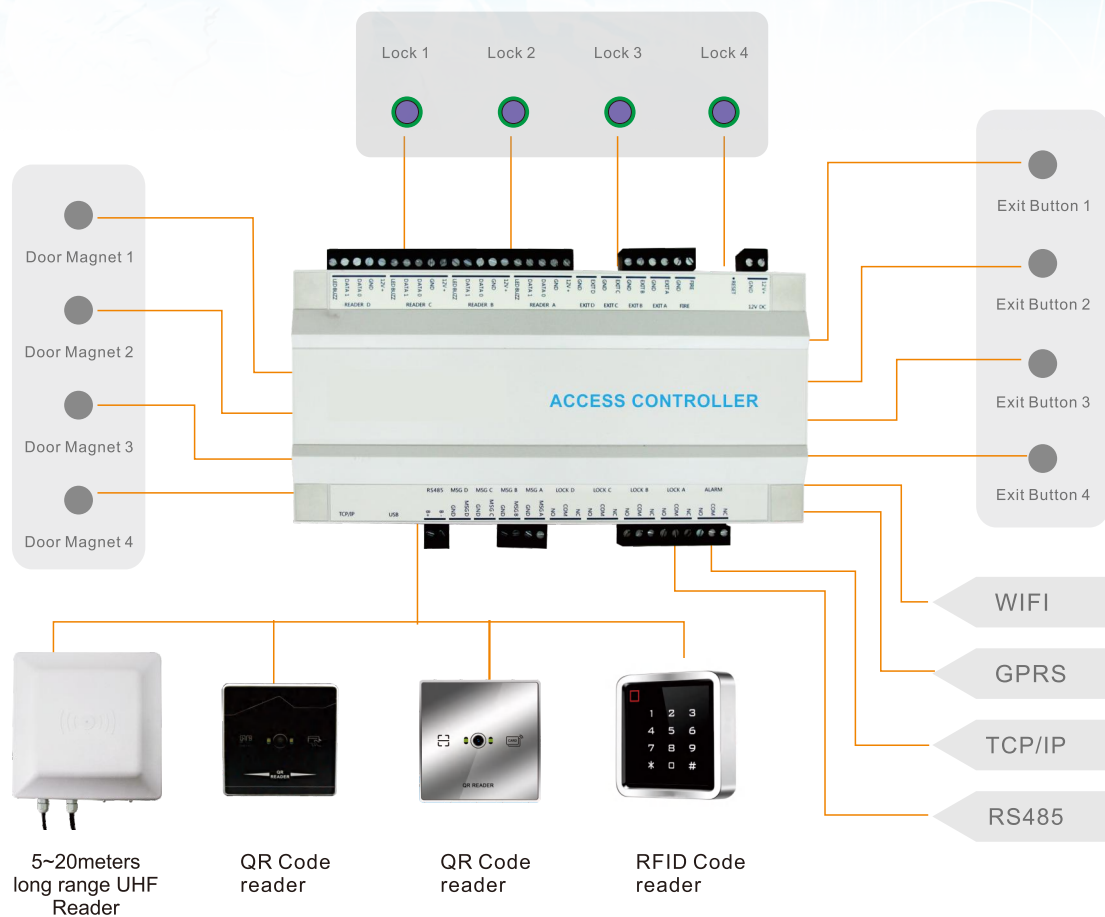

| Model                | TM-S01                          | TM-S02           | TM-S04             |
|----------------------|---------------------------------|------------------|--------------------|
| Product Name         | Single Door Two Ways            | 2 Doors Two Ways | 4 Doors Single Way |
| Exit                 | 1                               | 2                | 4                  |
| Fingerprint Capacity | 5000                            |                  |                    |
| Password Capacity    | 5000                            |                  |                    |
| Card Capacity        | 5000 (30000 Optional)           |                  |                    |
| Record               | 110000                          |                  |                    |
| Communication        | TCP/IP、USB、RS485、Wegiang In/Out |                  |                    |
| Distance             | 100 Meters                      |                  |                    |
| Alarm                | Fire                            |                  |                    |
| Power                | DC 12V , ≥100mA                 |                  |                    |
| Dimension            | 215*105*35mm                    |                  |                    |

# Authentication Certificate



FC CE RoSH



National High-tech Enterprise





# AI Dynamic Face Recognition Time Attendance Access Control Terminal



**TM-AI01**

5 inch HD IPS  
Touch Screen

IP65 Waterproof  
Outdoor/Indoor  
both Aluminium  
alloy Case



**TM-AI02**

4.3 inch HD IPS  
Touch Screen

LED Frame  
Plastic Case  
Bell Button



**TM-AI03**

4.3 inch HD IPS  
Touch Screen

Support Face &  
ID/IC card  
optional



Face



Password



RFID Card



Infrared Fill-in



USB Disk



Wi-Fi



TCP/IP

## Specifications

|                           |                                                                                                                                                               |
|---------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product name              | AI Dynamic Face Recognition Time Attendance Access Control Terminal                                                                                           |
| Multiple Languages        | English and other 16 types                                                                                                                                    |
| Keypad                    | Touch keypad                                                                                                                                                  |
| Operation system          | LINUX 3.10                                                                                                                                                    |
| CPU,NPU                   | 1.2G Dual-Core ARM Cortex-A7, 600G ( 0.6T, 1.2T Optional )                                                                                                    |
| RAM                       | 256MB (512MB Optional ) DDR3                                                                                                                                  |
| ROM                       | eMMC Flash 4GB (8GB Optional )                                                                                                                                |
| Binocular camera          | 2MP Colorful WDR+2MP Infrared live camera                                                                                                                     |
| Logs capacity             | 500000                                                                                                                                                        |
| Face Registration         | Local operation: Enroll face with machine, import user photo with U disk<br>Software operation: Import user photo to software, capture user photo with camera |
| Verification              | Dynamic face recognition, password, ID/IC card optional                                                                                                       |
| Face capacity             | 5000 (50000 optional)                                                                                                                                         |
| Card Capacity             | 5000 (50000 optional), ID Card Standard, IC Card Optional                                                                                                     |
| Password Capacity         | 5000 (50000 optional)                                                                                                                                         |
| Face Recognition Accuracy | 99.70%                                                                                                                                                        |
| Working temperature       | -15°C~+45°C(storage temperature -40°C ~ +65°C)                                                                                                                |
| Working humidity          | 20% ~ 90%(storage humidity 20% ~ 90±2%)                                                                                                                       |
| stand-by current          | 310mA                                                                                                                                                         |
| Working current           | 520mA                                                                                                                                                         |
| Working voltage           | DC12V                                                                                                                                                         |
| Installation              | Standard: Wall mount, desktop stand; Optional: bracket for turnstile, floor stand                                                                             |

# AI Dynamic Face Recognition Time Attendance Access Control Terminal



## TM-AI05

5 inch IPS  
Touch Screen

Both Desktop Bracket/  
Wall-mounted Bracket  
Screen Virtual  
Bell Button



## TM-AI06

4.3 inch IPS  
Touch Screen

Best Price  
Model



## TM-AI08

8 inch HD IPS  
Touch Screen

Mifare & EM  
card Both  
50000 Users



Face



Password



RFID Card



Infrared Fill-in



USB Disk



Wi-Fi



TCP/IP

## Specifications

|                           |                                                                                                                                                               |
|---------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product name              | AI Dynamic Face Recognition Time Attendance Access Control Terminal                                                                                           |
| Multiple Languages        | English and other 16 types                                                                                                                                    |
| Keypad                    | Touch keypad                                                                                                                                                  |
| Operation system          | LINUX 3.10                                                                                                                                                    |
| CPU,NPU                   | 1.2G Dual-Core ARM Cortex-A7, 600G ( 0.6T, 1.2T Optional )                                                                                                    |
| RAM                       | 256MB (512MB Optional ) DDR3                                                                                                                                  |
| ROM                       | eMMC Flash 4GB (8GB Optional )                                                                                                                                |
| Binocular camera          | 2MP Colorful WDR+2MP Infrared live camera                                                                                                                     |
| Logs capacity             | 50000                                                                                                                                                         |
| Face Registration         | Local operation: Enroll face with machine, import user photo with U disk<br>Software operation: Import user photo to software, capture user photo with camera |
| Verification              | Dynamic face recognition, password, ID/IC card optional                                                                                                       |
| Face capacity             | 5000 (50000 optional)                                                                                                                                         |
| Card Capacity             | 5000 (50000 optional), ID Card Standard, IC Card Optional                                                                                                     |
| Password Capacity         | 5000 (50000 optional)                                                                                                                                         |
| Face Recognition Accuracy | 99.70%                                                                                                                                                        |
| Working temperature       | -15°C~+45°C(storage temperature -40°C ~ +65°C)                                                                                                                |
| Working humidity          | 20% ~ 90%(storage humidity 20% ~ 90±2%)                                                                                                                       |
| stand-by current          | 310mA                                                                                                                                                         |
| Working current           | 520mA                                                                                                                                                         |
| Working voltage           | DC12V                                                                                                                                                         |
| Installation              | Standard: Wall mount, desktop stand; Optional: bracket for turnstile, floor stand                                                                             |



# AI Dynamic Face Recognition Time Attendance Access Control Terminal

10.1  
inch



## TM-AI03F

5 inch IPS Touch Screen

Support Face & Fingerprint, Card

Fingerprint: 10000(50000 optional)




## TM-AI06F

4 inch IPS Touch Screen

Support Face & Fingerprint, CardTouch screen

Fingerprint: 10000

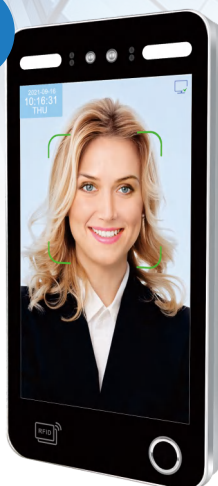

## TM-X1

10.1 inch IPS Touch Screen

Waterproof IP65  
Face recognition & Fingerprint ID/IC  
Fingerprint: 100000



## TM-AI07F

5 inch HD IPS Touch Screen

AI Face & Fingerprint Type  
Aluminium alloy Case

Fingerprint: 100000



## TM-AI18EF

8 inch HD IPS Touch Screen

AI Face & Fingerprint Type  
Aluminium alloy Case

Fingerprint: 100000



Face



Fingerprint



Password



RFID Card



Infrared Fill-in



USB Disk



Wi-Fi



## Specifications

|                           |                                                                                                                                                               |
|---------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Multiple Languages        | English and other 16 types                                                                                                                                    |
| Keypad                    | Touch keypad                                                                                                                                                  |
| Operation system          | LINUX 3.10                                                                                                                                                    |
| CPU,NPU                   | 1.2G Dual-Core ARM Cortex-A7, 600G ( 0.6T, 1.2T Optional )                                                                                                    |
| RAM                       | 256MB (512MB Optional ) DDR3                                                                                                                                  |
| ROM                       | eMMC Flash 4GB (8GB Optional )                                                                                                                                |
| Binocular camera          | 2MP Colorful WDR+2MP Infrared live camera                                                                                                                     |
| Logs capacity             | 500000                                                                                                                                                        |
| Face Registration         | Local operation: Enroll face with machine, import user photo with U disk<br>Software operation: Import user photo to software, capture user photo with camera |
| Verification              | Dynamic face recognition, password, ID/IC card optional                                                                                                       |
| Face capacity             | 5000 (50000 optional)                                                                                                                                         |
| Fingerprint capacity      | 10000                                                                                                                                                         |
| Card Capacity             | 5000 (50000 optional), ID Card Standard, IC Card Optional                                                                                                     |
| Password Capacity         | 5000 (50000 optional)                                                                                                                                         |
| Face Recognition Accuracy | 99.70%                                                                                                                                                        |
| Working temperature       | -15°C~+45°C(storage temperature -40°C ~ +65°C)                                                                                                                |
| Working humidity          | 20% ~ 90%(storage humidity 20% ~ 90±2%)                                                                                                                       |
| stand-by current          | 310mA                                                                                                                                                         |
| Working current           | 520mA                                                                                                                                                         |
| Working voltage           | DC12V                                                                                                                                                         |
| Installation              | Standard: Wall mount, desktop stand; Optional: bracket for turnstile, floor stand                                                                             |

## Infrared Live Body Detection

Fast identify forehead, nose, chin, mouth, etc.



# ECO AI Dynamic Face Recognition Time Attendance Access Control Terminal



**TM-AI Face 11**

4.3 inch  
Touch Screen



**TM-AI26**

4.3 inch  
Touch Screen



**TM-AI20**

2.8 inch  
Touch Key



**TM-AI21**

4.0 inch  
Touch Screen

## Specifications

|                             |                                                                                                       |
|-----------------------------|-------------------------------------------------------------------------------------------------------|
| Keypad                      | Touch keypad                                                                                          |
| Operation system            | LINUX 3.10                                                                                            |
| CPU                         | 800M single-core ARM Cortex-A7                                                                        |
| NPU                         | 800G (0.8T) Hashrate                                                                                  |
| RAM, ROM                    | 256M DDR3L, 4G EMMC                                                                                   |
| Camera                      | 2MP color camera + 2MP infrared camera                                                                |
| Logs capacity               | 500000                                                                                                |
| Verification                | Face recognition, password, ID Card(IC card optional)                                                 |
| Face capacity               | 5000                                                                                                  |
| Card Capacity               | 5000                                                                                                  |
| Password Capacity           | 5000                                                                                                  |
| Face Recognition Accuracy   | 99.70%                                                                                                |
| Recognition Speed           | ≤0.2s                                                                                                 |
| Recognition Distance        | 0.5~2.5 meters (0.5~1.5 meters with live face recognition on)                                         |
| WDR                         | Wide dynamic range, support accurate face recognition under<br>Strong light, dark light and backlight |
| USB                         | USB2.0x1 , Support U disk import/export data                                                          |
| Power supply                | DC12V 1A                                                                                              |
| Built-in Battery (optional) | 7.4V, 2000mA (AI Face 11)                                                                             |
| Network Communication       | TCP/IP, USB, Wifi                                                                                     |
| Free Attendance software    | Local software and web based cloud software                                                           |
| Mask Detection              | Support mask detection and face recognition with mask on                                              |
| Access Control Interface    | Lock output , Doorbell output/external ring , Weigand input/output                                    |
| Environmental adaptability  | Working temperature: 0~45°C Working humidity: 20% ~90%                                                |
| Muti language               | Support 20 national languages                                                                         |



# Static Face / Fingerprint / Card Time Attendance

Different Case designs for your Option



Face



Fingerprint



Password



RFID Card

## Specifications

|                      |                                                            |
|----------------------|------------------------------------------------------------|
| Product name         | Face / Fingerprint / Card Time Attendance                  |
| Working              | Network                                                    |
| Identification Style | Face, fingerprint, card, password                          |
| Identification Speed | <1 sec                                                     |
| FAR                  | <0.01                                                      |
| FAR                  | <0.0001                                                    |
| Face Capacity        | 1000/3000                                                  |
| Fingerprint Capacity | 3000/5000                                                  |
| Card Capacity        | 3000/5000                                                  |
| Password Capacity    | 3000/5000                                                  |
| Record Capacity      | 100,000/300,000                                            |
| Display              | 2.8 TFT/4.3 TFT                                            |
| Language             | English/Spanish/Turkish/Arabic/Thai/Persian and so on      |
| Communication        | TCP/IP/USB                                                 |
| Humidity             | 20%-60%                                                    |
| Temperature          | 0°C-40°C                                                   |
| Access control       | Simple access control function for door open/close control |
| WG                   | 1 Set WG In / Out                                          |
| Output               | Electric Lock                                              |
| Voice                | Boom, Dual LED                                             |
| Power Supply         | DC9V                                                       |
| Software             | Free                                                       |

# Fingerprint & Card Access Control

Different Case designs for your Option



**TFS28**

2.4" TFT Color LCD  
Fingerprint 3000  
Size 105\*105\*30mm



**TFS50**

Matellic case IP65 waterproof  
(Optional Ip67) ID&IC card  
Slim design: 140\*42\*18mm,  
for door with slim frame



**TFS28 Plus**

2.4" TFT Color LCD  
Fingerprint 3000  
Size 105\*105\*30mm



**TFS30**

2.4" TFT Color LCD  
Fingerprint 3000  
Size 190\*80\*33mm



**TFS70**

2.0" TFT Color LCD  
Fingerprint 3000  
Size 190\*80\*33mm



**TFS90**

2.8" TFT Color LCD  
Fingerprint 3000  
Size 190\*80\*42mm



## Specifications

|                      |                                                                         |
|----------------------|-------------------------------------------------------------------------|
| Product name         | Fingerprint & Card Access Control                                       |
| Working              | Online                                                                  |
| Identification Style | Fingerprint, card, password                                             |
| Identification Speed | <1 sec                                                                  |
| FAR                  | <0.01                                                                   |
| FAR                  | <0.0001                                                                 |
| Fingerprint Capacity | 3000                                                                    |
| Card Capacity        | 3000                                                                    |
| Password Capacity    | 3000                                                                    |
| Record Capacity      | 200,000                                                                 |
| Display              | 2.0 TFT/2.4 TFT                                                         |
| Language             | English/Spanish/Turkish/Arabic/Thai/Persian and so on                   |
| Communication        | TCP/IP/USB                                                              |
| Humidity             | 20%-60%                                                                 |
| Temperature          | 0°C-40°C                                                                |
| Access control       | Professional Simple access control function for door open/close control |
| Output               | Electric Lock                                                           |
| Voice                | Boom, Dual LED                                                          |
| Power Supply         | DC12V                                                                   |
| Software             | Free                                                                    |



# Fingerprint & Card Time Attendance



**TM52**

Size 187\*131\*42mm



**TM20**

Size 198\*140\*40mm



**TM30**

Size 190\*180\*42mm



**TM60**

Size 189\*137\*50mm



**TM70**

Size 187\*131\*42mm



**TM50**

Size 185\*125\*38mm



**TM51**

Size 185\*125\*38mm



**TM58**

Size 180\*128\*40mm



**TM90**

Size 192\*136\*40mm



**TM1000**

Size 180\*130\*38mm

## Specifications

|                      |                                                            |
|----------------------|------------------------------------------------------------|
| Product name         | Fingerprint & Card Time Attendance                         |
| Working              | Online                                                     |
| Identification Style | Fingerprint, card, password                                |
| Identification Speed | <1 sec                                                     |
| FAR                  | <0.01                                                      |
| FAR                  | <0.0001                                                    |
| Fingerprint Capacity | 3000                                                       |
| Card Capacity        | 3000                                                       |
| Password Capacity    | 3000                                                       |
| Record Capacity      | 200,000                                                    |
| Display              | 2.4 / 2.8 TFT Color Screen                                 |
| Language             | English/Spanish/Turkish/Arabic/Thai/Persian and so on      |
| Communication        | TCP/IP/USB                                                 |
| Humidity             | 20%-60%                                                    |
| Temperature          | 0°C-40°C                                                   |
| Access control       | Simple access control function for door open/close control |
| Output               | Electric Lock                                              |
| Voice                | Boom, Dual LED                                             |
| Power Supply         | DC9V                                                       |
| Software             | Free                                                       |



Fingerprint




Password



RFID Card



TCP/IP



# Standalone Excel Report Time Attendance



**TM1800**  
Size 160\*130\*30mm



**TM2800**  
Size 160\*130\*30mm



**TM3800**  
Size 160\*130\*30mm



**TM4800**  
Size 160\*130\*30mm



**TM8000**  
Size 170\*130\*30mm

## Specifications


|                      |                                                                 |
|----------------------|-----------------------------------------------------------------|
| Product name         | Fingerprint & Card Time Attendance                              |
| Working              | Standalone                                                      |
| Identification Style | Fingerprint, card, password                                     |
| Identification Speed | <0.8 sec                                                        |
| FAR                  | <0.01                                                           |
| FAR                  | <0.0001                                                         |
| Fingerprint Capacity | 1000                                                            |
| Card Capacity        | 1000                                                            |
| Password Capacity    | 1000                                                            |
| Record Capacity      | 100,000                                                         |
| Display              | 2.4 / 2.8 TFT Color Screen                                      |
| Language             | English/Spanish/Turkish/Arabic/Thai/French/Vietnamese and so on |
| Communication        | FP+Card, PIN+Card,FP+PIN, FP+PIN+Card                           |
| Humidity             | 20%-60%                                                         |
| Temperature          | 0°C-40°C                                                        |
| Report               | USB pen driver download reports in Excel or TXT file            |
| Voice                | Late or leave early voice promote                               |
| Power Supply         | DC5V                                                            |



Fingerprint



Password



RFID Card



Automatic Report  
Generation



USB Flash Disk





# Standalone Fingerprint & Card Access Control



**TFS10**

Size:118\*118\*30mm



**TFS12A**

Size:86\*86\*30mm



**TFS16**

Size:140\*68\*34mm




**TAS10**

Size:118\*118\*30mm



## Specifications

|                      |                                                                 |
|----------------------|-----------------------------------------------------------------|
| Product name         | Fingerprint & Card Time Attendance                              |
| Working              | Standalone                                                      |
| Identification Style | Fingerprint, card, password                                     |
| Identification Speed | <0.8 sec                                                        |
| FAR                  | <0.01                                                           |
| FAR                  | <0.0001                                                         |
| Fingerprint Capacity | 1000                                                            |
| Card Capacity        | 1000                                                            |
| Password Capacity    | 1000                                                            |
| Record Capacity      | 100,000                                                         |
| Display              | 2.4 / 2.8 TFT Color Screen                                      |
| Language             | English/Spanish/Turkish/Arabic/Thai/French/Vietnamese and so on |
| Communication        | FP+Card, PIN+Card,FP+PIN, FP+PIN+Card                           |
| Humidity             | 20%-60%                                                         |
| Temperature          | 0°C-40°C                                                        |
| Access control       | Simple access control function for door open/close control      |
| Power Supply         | DC12V                                                           |

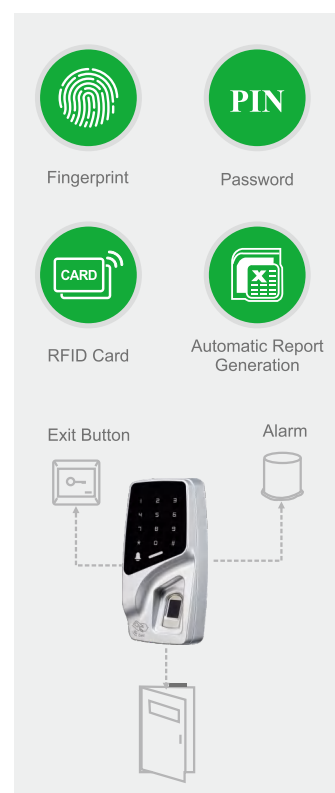

# QR Code Scanner For Access Control System

- ★ Read distance: 0~10cm(for QR code)
- ★ Code Type: QR code, 1D/2D barcode
- ★ working currency: <60MA
- ★ Card type: ID card, IC card, NFC card

- ★ Interface: Wiegand/RS232/RS485
- ★ Card read distance: 3~6cm
- ★ Decoding mode: Image decoding
- ★ Power supply: DC 12V



QR code





RFID/Mifare



Smart chip



NFC Access Control Solution

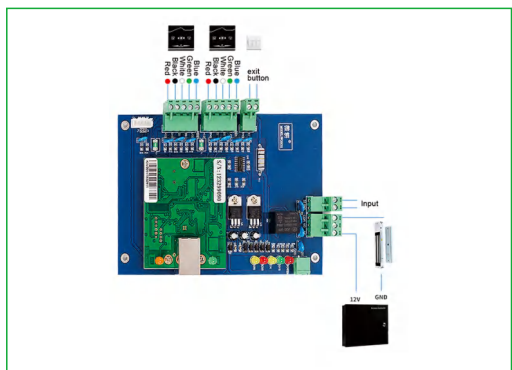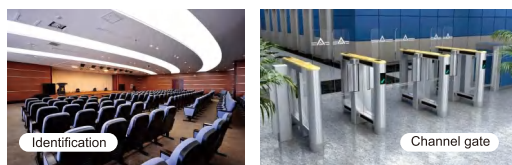

## Specifications

|                    |                                    |
|--------------------|------------------------------------|
| Product name       | QR code access control card reader |
| Read distance      | 0~10cm(for QR code)                |
| Code Type          | QR code, 1D/2D barcode             |
| working currency   | < 60MA                             |
| Card type          | ID card, IC card, NFC card         |
| Interface          | Wiegand/USB/RS232/RS485            |
| Card read distance | 3~6cm                              |
| Material           | Tempered glass and Zinc alloy      |
| Decoding mode      | Image decoding                     |
| Power supply       | DC 12V                             |



# WiFi Video Intercom Face Access

Works with Smartphone by Tuya APP



**T12**

114\*75\*16mm

**TF2**

135\*47\*24mm

**TF3**

139\*70\*22mm

## Specifications

|                       |                                                                                                                                                                                      |
|-----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Card Type             | EM Card(125khz), Mifare Card(13.56Mhz) optional                                                                                                                                      |
| Keypad                | Touch Keypad with Backlight                                                                                                                                                          |
| Material              | Plastic                                                                                                                                                                              |
| User Capacity         | 2000                                                                                                                                                                                 |
| Operating Voltage     | 12~24V                                                                                                                                                                               |
| Standby Current       | ≤35mA                                                                                                                                                                                |
| Waterproof            | IP68                                                                                                                                                                                 |
| Operating Temperature | -35°C~55°C                                                                                                                                                                           |
| Access Ways           | Card, PIN, or combination                                                                                                                                                            |
| Door Bell             | Support                                                                                                                                                                              |
| Wiegand               | WG 26/34, input&output                                                                                                                                                               |
| Admin Card            | Support admin add card and admin delete card                                                                                                                                         |
| Tuya APP Function     | Remote unlock with APP, Add/edit/delete users in APP, Check unlock records, Generate recyclable temporary password and set validity period, Generate one-time use temporary password |

# Proximity card time attendance

## Proximity card time attendance terminal

- ◆ Access Control, WG26
- ◆ Store your data on a USB flash drive
- ◆ Communication: USB , RS485, TCP/IP



**TFS800**



**TFS700**



**TFS500**



**TD300**

2.8" TFT Color LCD  
180\*128\*50mm



**TD800**

2.8" TFT Color LCD  
187\*131\*42mm



**TD900**

2.4" TFT Color LCD  
187\*131\*42mm

Download reports directly  
without software



## Specifications

|                      |                                             |
|----------------------|---------------------------------------------|
| Identification style | Card/PIN                                    |
| Languages            | Chinese , English, and more.                |
| Card capacity        | 10000                                       |
| Record capacity      | 100.000                                     |
| LCD Size             | 2.4" TFT Color LCD / 2.8" TFT Color LCD     |
| Communication        | USB Cable/USB flash drive (optional TCP/IP) |
| Access control       | Weigand 26 output and relay output          |
| Voltage              | DC5V / DC9V                                 |
| Optional accessories | Optional battery                            |



# Fingerprint Reader



**U5000**

95 (L) \* 52 (W) \* 36 (H) mm



**U6000**

74.8 (L) \* 50 (W) \* 30.8 (H) mm



Fingerprint



HF Cloud




USB 2.0



Win



Android



Lin



Dry Finger



Wet Finger



Lingt Texture Finger



Fake Fingerprint



High precision optical fingerprint sensor,  
rejects fake fingerprint




## Specifications

| Hardware                          |                                            |
|-----------------------------------|--------------------------------------------|
| Physical size                     | -20 ° C to +70 ° C                         |
| Operating temperature             | 98%                                        |
| Working humidity                  | 5V                                         |
| Operating voltage Working current | Up to 140mA                                |
| Software                          | Window,Android , Linx                      |
| OS                                | For Free, support ASP.NET, JAVA, Active X, |
| SDK                               | Web-based development etc                  |
| Fingerprint Sensor                |                                            |
| Image Size                        | 256*288                                    |
| Image Resolution                  | 500DPI                                     |
| Window Area                       | 17mm * 19mm                                |
| Fidelity FRR                      | 0.01%                                      |
| False rate FAR                    | 0.0001 %                                   |
| Match Speed                       | <1s                                        |
| Image Standard                    | WSQ , BMP and RAW, etc                     |
| Fingerprint Standard              | ISO19794-2/-4, ANSI378                     |
| Durable                           | It can be used more than 1,000,000 times   |
| Good anti-static                  | > 15KV, for dry weather                    |
| Communication                     |                                            |
| Interface                         | USB/ Micro-USB (optional RS232/UART)       |

# Online Guard Tour System

**4G/GPRS/GPS real time guard tour patrol monitoring system with cloud software and mobile APP**

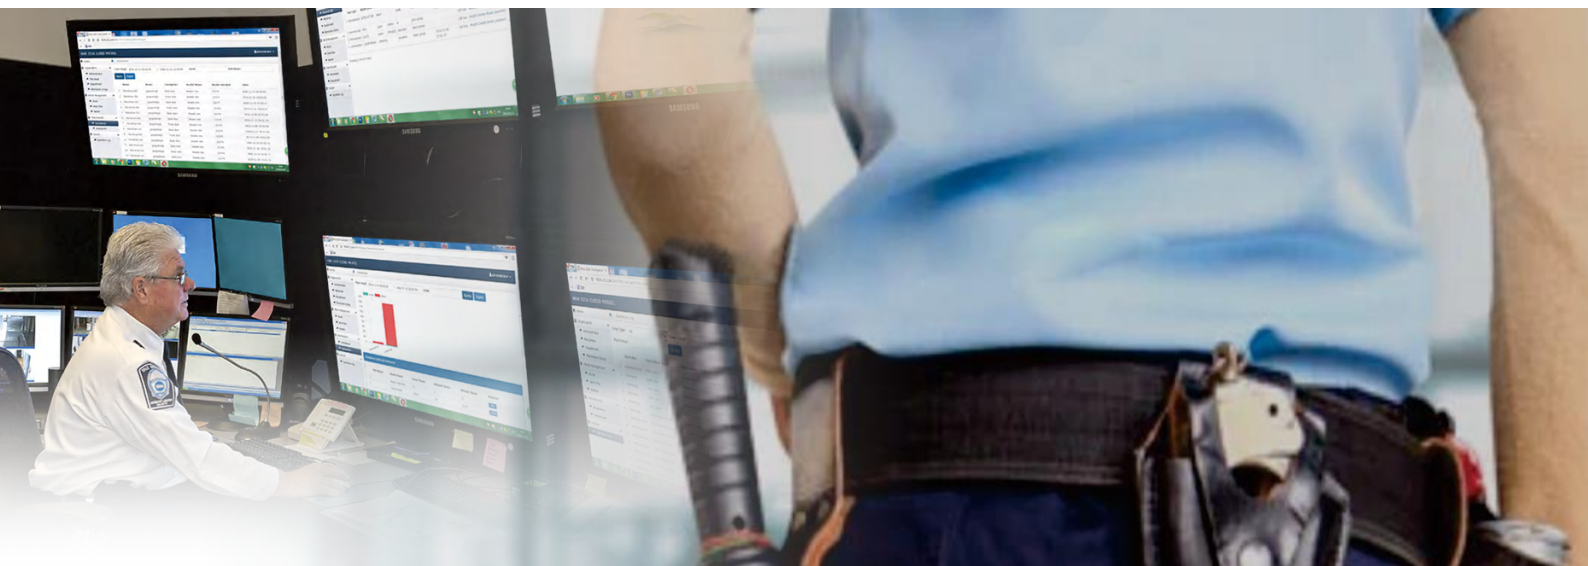

**TM-K2**

## Online Guard Tour System

4G/GPRS/GPS real time guard tour patrol monitoring system with cloud software and mobile APP



**TM-101Z**

## RFID Guard Patrol System With Management Software

**Application:**  
security guard, hospital, public security, hotel patrol, Petrochemical patrol, etc



**TM-101E**

## Economic Guard Tour System

2020 Popular Security Product Guard Tour Patrol System Standalone Software Download Data



## Touch Probe Security Guard Tour System



**TM-101X**

## Security Guard Tour Patrol Checkpoint



**TM-100T**

**TM-100**

# Long range Integrated UHF Reader/writer



UHF Ultrahigh frequency  
Long distance reading



Group tags reading, To read  
the tags at per time



IP65 Waterproof, Dust proof  
and lightning protection



## TM-SM06

6-10M

Size: 227\*227\*60mm  
Weight: 2 Kg

## TM-SM15

10-15M

Size: 450\*450\*50mm  
Weight: 4.5 Kg

## TM-SR20

15-20M

Size: 215\*215\*50mm  
Weight: 0.8 Kg

## TM-SR40

30-40M

Size: 445\*445\*35mm  
Weight: 2.55 Kg

## Specifications

|                          |                                                                                          |
|--------------------------|------------------------------------------------------------------------------------------|
| Product name             | Long range Integrated UHF Reader/writer                                                  |
| Working frequency        | 865 ~ 868MHz/902 ~ 928MHz                                                                |
| Reading distance         | 6-40 meters                                                                              |
| Massive reading quantity | > 50 tags                                                                                |
| Label protocol           | Support ISO18000-6B, ISO18000-6C (EPC GEN2) protocol electronic label                    |
| Frequency hopping mode   | broad spectrum frequency hopping (FHSS) or fixed frequency, which can be set by software |
| Working mode             | automatic mode, trigger mode, interactive mode, etc.                                     |
| RF power                 | 0-30dBm (power software adjustable)                                                      |
| Antenna parameters       | 8-12dBi circularly polarized antenna (built-in)                                          |
| Support interface        | Standard RS232/RS485, Wiegand26/34 (Optional TCP/IP, WIFI, GPRS)                         |
| Working voltage          | 12V                                                                                      |
| Recognition prompt       | beep or LED flash                                                                        |
| Power consumption        | <1W                                                                                      |
| Working temperature      | -20°C ~ +70°C                                                                            |



# App Control Smart Biomtric Door Lock



Face Unlock



Fingerprint Unlock



Card Unlock



Password Unlock



Key Unlock



Door bell



Digital Door viewer



**TL20**

TT Lock/Tuya Wifi  
Fingerprint Apartment  
Metal Door Lock



**TL60**

Tuya Wifi  
3D Face & Fingerprint  
Glass Door lock



**B1**

TT Lock/Tuya Wifi  
Fingerprint Wooden/  
Metal Door Lock



**A9**

3D Face Recognition  
Full-Automatic  
Smart Lock



**B3**

TT Lock/Tuya Wifi  
Fingerprint  
Wooden Door Lock



**D1**


American Standard  
Code Button &  
Key Deadbolt  
door lock



**D2**


American Standard  
TT Lock/Tuya Wifi  
Fingerprint, Code  
Button & Key Deadbolt  
door lock

## ◆ 6068 Anti-theft Mortise

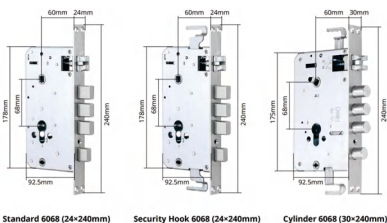


Standard 6068 (24x240mm) Security Hook 6068 (24x240mm) Cylinder 6068 (30x240mm)

## ◆ Swing Mortise (72 Series)

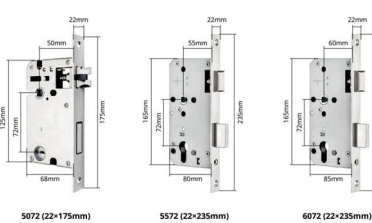

5072 (22x175mm) 5572 (22x235mm) 6072 (22x235mm)

## ◆ Single Latch & Deadbolt

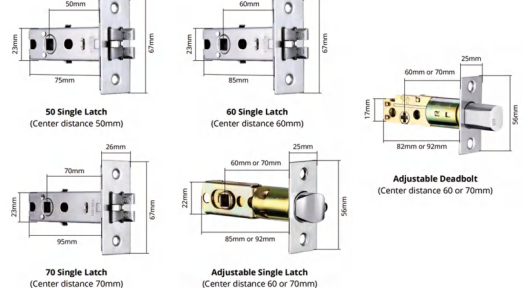

50 Single Latch  
(Center distance 50mm)

60 Single Latch  
(Center distance 60mm)

70 Single Latch  
(Center distance 70mm)

Adjustable Single Latch  
(Center distance 60 or 70mm)

Adjustable Deadbolt  
(Center distance 60 or 70mm)

# Card Access Control



## RFID Card Access Control



TDS10  
Size 155\*45\*20



TDS19  
Size 86\*86\*20



TDS03  
Size 86\*86\*18



TDS18  
Size 111\*61\*22



## Access control system accessories



TM-PS12V3A



TM-PS12V5A



TM-PS12V5AB  
(BATTERY)



TM-250  
Electric Bolt Lock



TM-280LED Magnetic  
lock ( two lines )



TM-20 Aluminum  
alloy door clip



TM280-U U  
support



TM280-ZL L type, Z type  
magnetic lock support



TM - 01A  
Stainless steel button



TM-02A  
touch button



TM-02A  
touch button



TM-05A  
Exit button



TM-06A Infrared  
Exit button



TM-07W Emergency  
door release



Remote button

# TiMY®



## Shenzhen Union Timmy Technology Co.,Ltd.

3rd Floor, Building A5, Silicon Valley Power Qinghu Park,  
Dahe Road, Qinghu Community, Longhua District, Shenzhen, China.

<http://www.sztimmy.net>

<http://www.timyteco.net>

Tel: +86 755 83875070

Email: [admin@sztimmy.com.cn](mailto:admin@sztimmy.com.cn)

Edition: SZ 2023, 08, EN