
CLIVENT – Solutions for the cold season


CE200


Supply and Extract Air Ventilation with Heat Recovery
CE200 Decentralized Heat Recovery Ventilation Unit
Maximum air flow rate: 300 m³/h
Minimum air flow rate: 75 m³/h
Dimensions: Width 270 × Depth 330–550 × Height 270 mm
Efficiency: up to 75%


CE 100 SN horizontal installation

CE 100 SN – The Decentralized Heat Recovery Ventilation Unit with only 2 × 100 mm Ø Wall Penetrations
- Easy installation, just like a fan
- Space-saving design with only 2 × 100 mm Ø wall penetrations
- Energy savings of up to 90% heat recovery
- Airflow capacity: 110 m³/h
- Width 610 × Depth 140 × Height 386 mm for horizontal installation
- Vertical installation is also possible


16SH


High-Performance Heat Pumps
6–16 kW and higher
Monobloc and split versions
Domestic hot water storage tanks
Functions:
Heating and cooling


R12 HP

Compact Heat Pump
No outdoor unit required – suitable for wall mounting or floor installation
R7 HP = 2 kW heating capacity
R10 HP = 2.4 kW heating capacity
R12 HP = 3 kW heating capacity
Ready to plug in with a 230 V Schuko plug


VF15

VF Series Heavy-Duty Electric Fan Heaters
VF21, 2.15 kW / 230 V Schuko plug
VF31, 3.3 kW / 230 V CEE plug
VF6, 6 kW / 400 V CEE plug
VF9, 9 kW / 400 V CEE plug
VF12, 12 kW / 400 V CEE plug
VF15, 15 kW / 400 V CEE plug
Special versions available in 500 V and vibration-resistant designs.

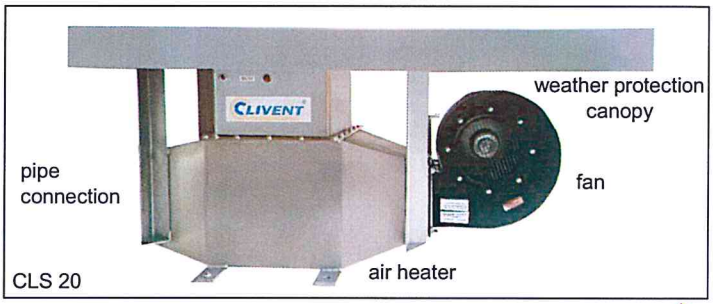

CLS 20


DT2000

Special Wall-Mounted Heater with Surface and Air Outlet Temperature Limitation to +60°C
Complies with the strict DGUV regulations.
Suitable for use in kindergartens, schools, nursing homes, living spaces, and residential containers.
Energy-efficient.
Heating capacities: 1 kW, 1.5 kW, 2 kW


EH 2000

CLS 20 for Outdoor Installation
Heating capacities:
15, 18, 20, 25 kW and higher, depending on requirements.
Used for frost protection of outdoor piping.

EH 2000 Electric Heater
2,000 W with oscillating heat distribution, ready to plug in
Width × Height × Depth:
240 × 604 × 190 mm


CB40

CB24 Dehumidifier
Dehumidification capacity 24 L/day
Recommended room size up to 100 m³
Airflow 180 m³/h, 367 mm wide × 610 mm high × 274 mm deep
CB40 Dehumidifier
Dehumidification capacity 40 L/day
Recommended room size up to 200 m³
Airflow 240 m³/h, 312 mm wide × 635 mm high × 453 mm deep
CTH Thermo-Hygrometer
Measuring device for room temperature and room humidification


CB 30 S

CB 30 S Dehumidifier for Heavy-Duty Applications
For building drying and specially designed for use in swimming pools.
Dehumidification capacity at 30°C and 80% relative humidity = 30 liters/day
Height 630 × Width 380 × Depth 400 mm


AQC450

Air Humidification AQC450
Air Quality Center
Multifunctional:
- Air humidification
- Air purification
- Fragrance diffusion

Ready to plug in: 230 V / 50 Hz
224 mm wide × 318 mm high × 165 mm deep


ACS 300

Air Purification
ACS 300 Universal Air Purifier with a Special Medical-Grade Filter IPC
Effective against allergies to pollen, vehicle exhaust fumes, barbecue odors, and tobacco smoke
Airflow capacity: 300 m³/h max., ready to plug in