



Dong sung
CORP.

DOHA INDUSTRY


www.doha.co.kr

WRAS 60°C

Your choice for clean and healthy water

DOHA Clean Tank

- External Reinforcement System
- Internal Reinforcement System

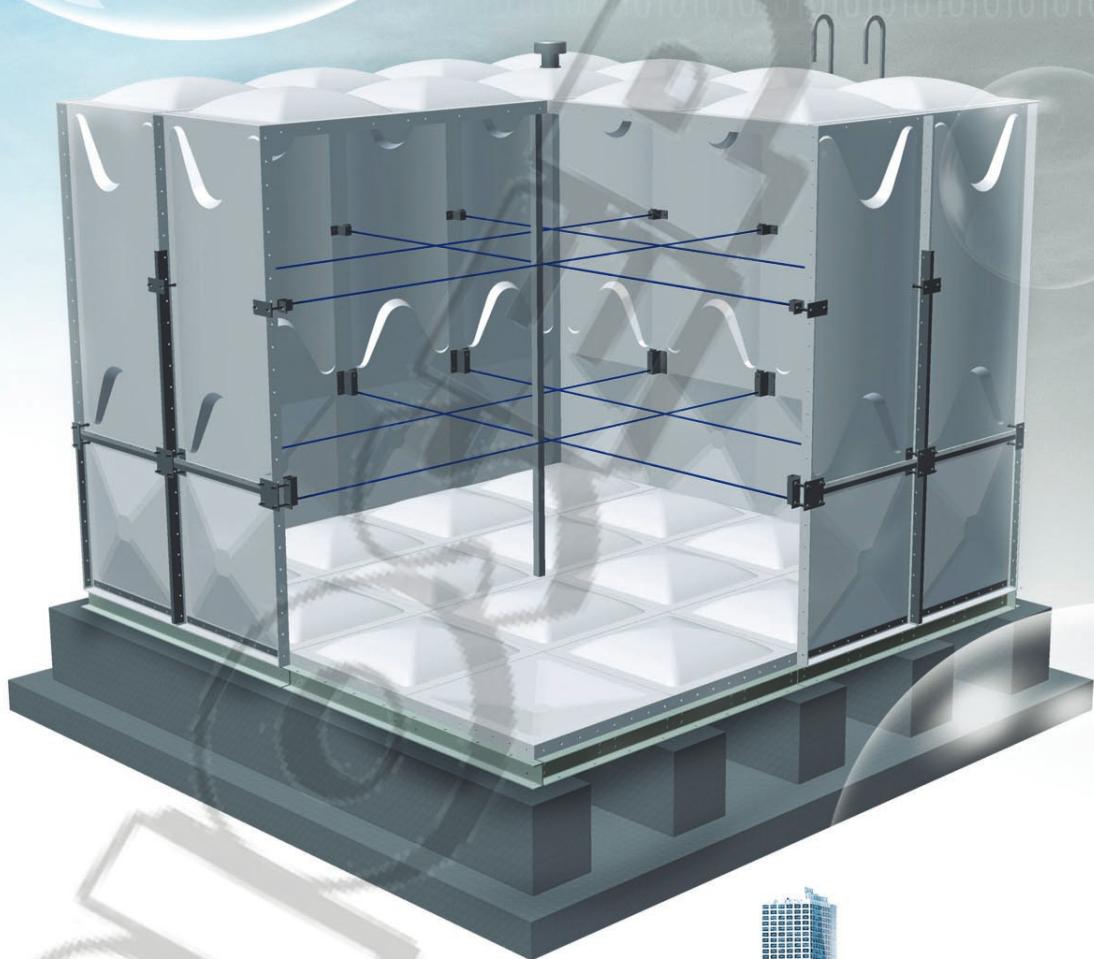





WRAS
APPROVED
PRODUCT



www.tangkipanelfrp.com

High Quality SMC Panel Water Tank

World Best Quality And Technology WRAS 60°C

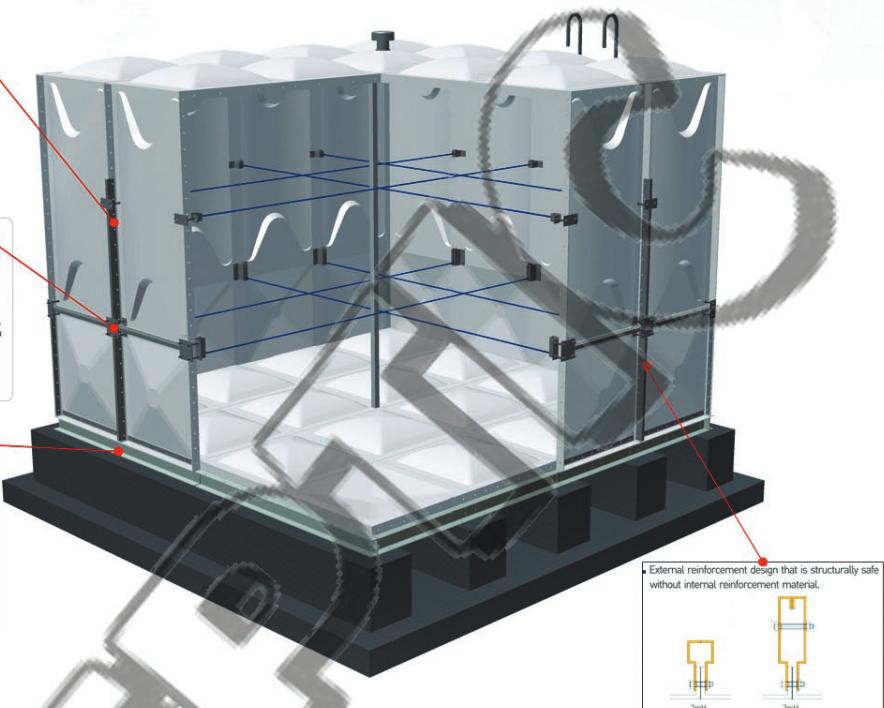

Fast Installation



DOHA Clean Tank



Specification and space for concrete foundation

Based on PAD production


Width : More than 400mm

Height : More than 600mm(including base frame)

Interval distance : Less than 1m at maximum



Outline dimension : W,L+400mm

Horizontality degree : Less than 1/500(Maintains smoothness at the upper part)

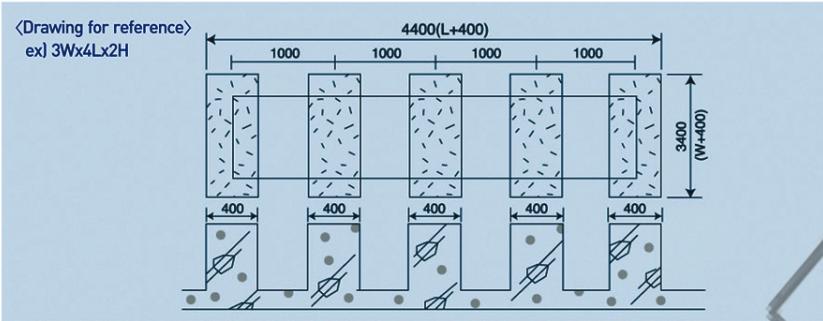


Installation space

A space for 600mm apart from the walls in four directions(1000mm for the upper part) is required for the installation of a tank and for its inspection and maintenance.



〈Side View〉

Standard composition of side panels by height

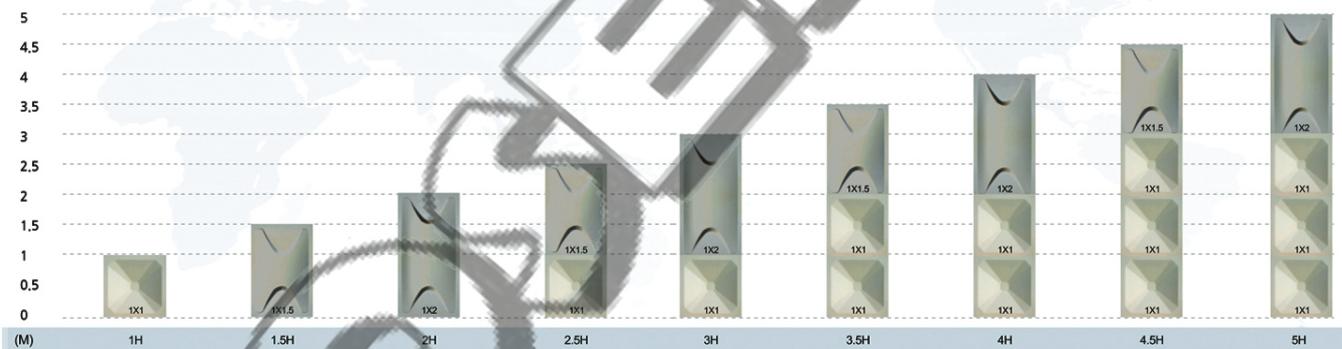

Kinds and Shapes

1000x2000



1000x1500



1000x1000



Side panels

500x1000



Drainage panels / Manhole panels

1000x1000

