

**Series 2, free-standing dishwasher, 60 cm, silver inox
SMS40E08AU**



ActiveWater - 3.5 Star WELS and 3 Star Energy.

- **AquaStop:** Bosch's warranty in case of water damage – throughout the lifetime of the appliance.*
- **Child door lock:** Prevents accidental opening of the dishwasher.
- **EcoSilence Drive:** especially energy-saving and silent in operation with a particularly high life span.
- 10 year rust-through warranty for the inner tub
- **AntiFingerprint:** visibility of fingerprints is considerably reduced.

Technical Data

Water consumption : 13.5 l
Built-in / Free-standing : Freestanding
Height of removable worktop : 30 mm
Dimensions of the product (HxWxD) : 845 x 600 x 600 mm
Depth with open door 90 degree : 1155 mm
Adjustable feet : Yes - all
Maximum adjustability feet : 20 mm
Adjustable plinth : Adjustable plinth
Net weight : 43.9 kg
Gross weight : 45.2 kg
Connection Rating : 2400 W
Fuse protection : 10 A
Voltage : 220-240 V
Frequency : 50; 60 Hz
Length electrical supply cord : 175 cm
Plug type : AU plug
Length inlet hose : 165 cm
Length outlet hose : 190 cm
EAN code : 4242002816739
Number of place settings : 13
Energy consumption : 0.73 kWh
Reference programme : Eco
Total cycle time of reference programme : 140 min
Noise level : 50 dB(A) re 1 pW
Installation typology : Free-standing with built under possibility



Series 2, free-standing dishwasher, 60 cm, silver inox SMS40E08AU

ActiveWater - 3.5 Star WELS and 3 Star Energy.

Capacity

- 13 international place settings

Consumption rates

- 3 Star energy rating, 3.5 Star WELS water rating
- 13.5 litres water consumption per wash and 268kWh energy consumption per year, based on Eco 45°C program

Design

- Freestanding Dishwasher - 60 cm wide
- Polinox inner tub: The Polinox inner tub is extremely durable, odourless and rust-free. German engineered with robust materials that withstand dints, scratches and discolouration, based on 10 year simulation tests.
- Effortless door closing: The door self-closes when below a 20° angle.
- Front facing control display
- Program selector with integrated start button

Wash Programs and Options

- 4 wash programs:
 - , - Pots & Pans: Heavily soiled pots, pans & dishes 70°C.
 - , - Auto: Automatic wash & dry. Mixed loads & soil levels 45-65°C.
 - , - Eco: Energy efficient wash & dry. Mixed loads & soil levels 45°C.
 - , - Quick wash: Express wash only. Lightly soiled dishes 45°C.
- 1 special option:
 - VarioSpeed™: Up to 50% faster wash time.

Performance

- ActiveWater™: Automatic load adjustment recognises the load condition in three steps and ensures that only the amount of electricity and water required for that load is used
- DosageAssist™: Maximises the effectiveness of detergent tablets. The tablet is dropped into a specially engineered

tray and is completely dissolved. For superior cleaning performance and a quieter wash.

- EcoSilence Drive® quiet and energy-efficient brushless motor (BLDC)
BLDC Main Pump: Variable water & spray pressure to achieve optimum cleaning results
BLDC Drain Pump: Fast and extra quiet draining of water, no gargling sounds
- AquaSensor™ technology: Regulates the water usage depending on the type and degree of soiling
- AutoBrilliance™: Automatic detergent and rinse aid sensor
- 3 stage self-cleaning filter system: design that helps reduce the need to wash the filter and prevents blockages
- Alternating spray-arm washing
- 5 Spray levels for maximum water contact and optimum wash results

Flexibility

- Vario™ basket system
- 2 folding plate racks in bottom basket
- 2 foldable cup shelves in top basket

Included Accessories

- Cutlery basket in bottom basket

Convenience

- Quiet: Operates at a noise level of 50dB(A)
- LED wash status indicator lights
- Electronic rinse aid indicator

Safety

- AquaStop™ Plus: Water supply device with lifetime anti-flood protection
- Child door lock


2 year warranty

Dimensions

- H: 845 mm x W: 600 mm x D: 600 mm
- Appliance height with top removed: 815 mm

**Series 2, free-standing dishwasher, 60 cm,
silver inox
SMS40E08AU**

measurements in mm

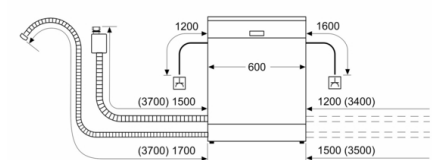

socket
() values with extension kit