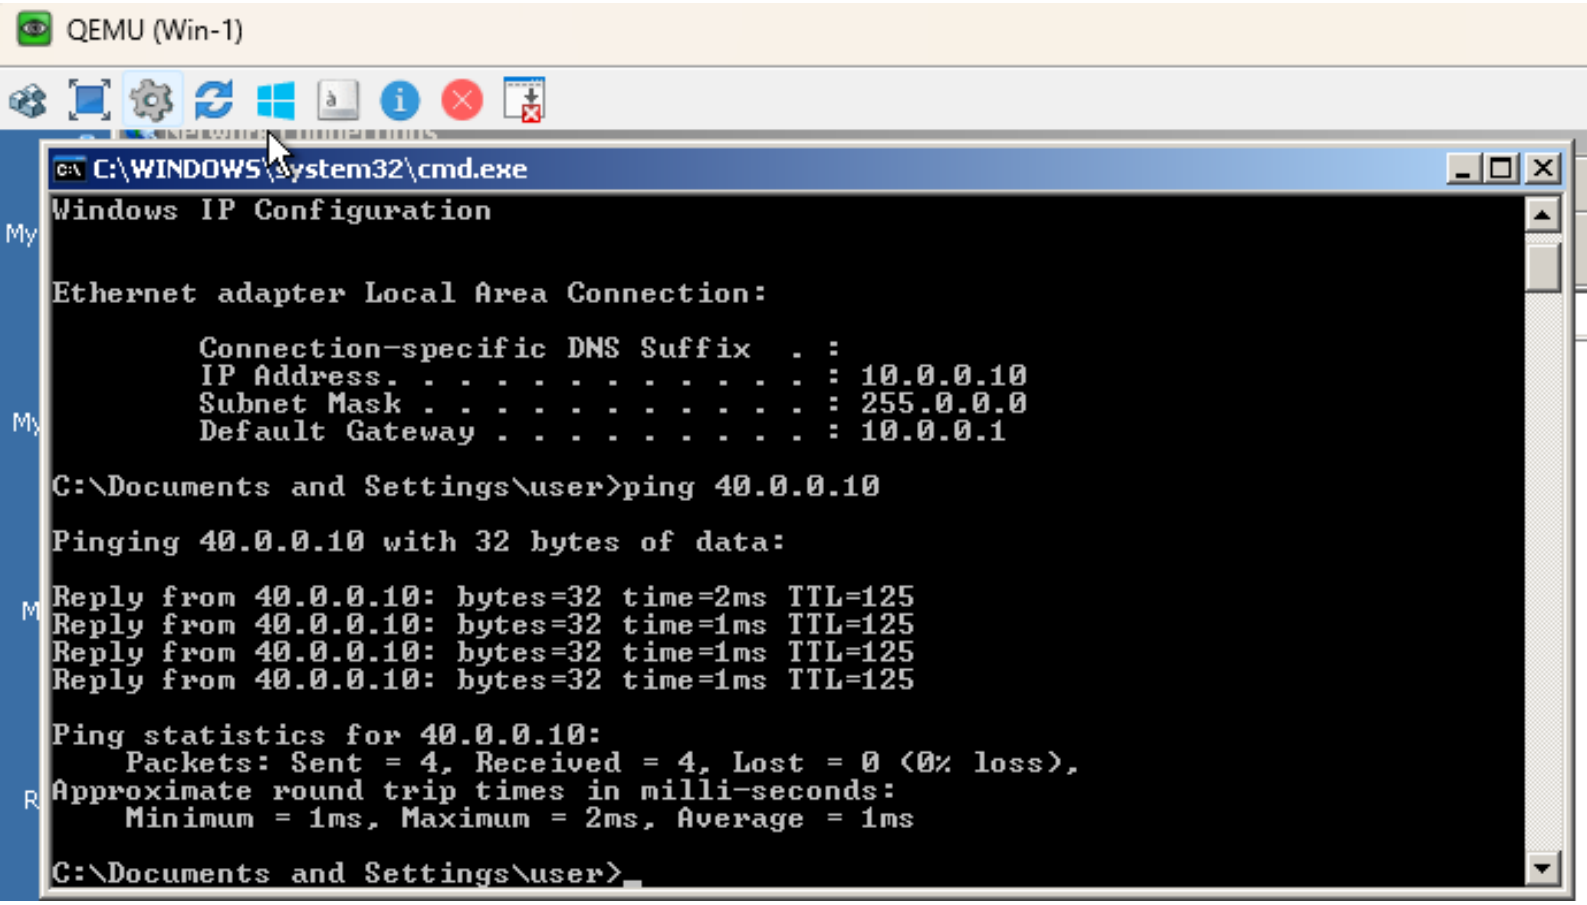
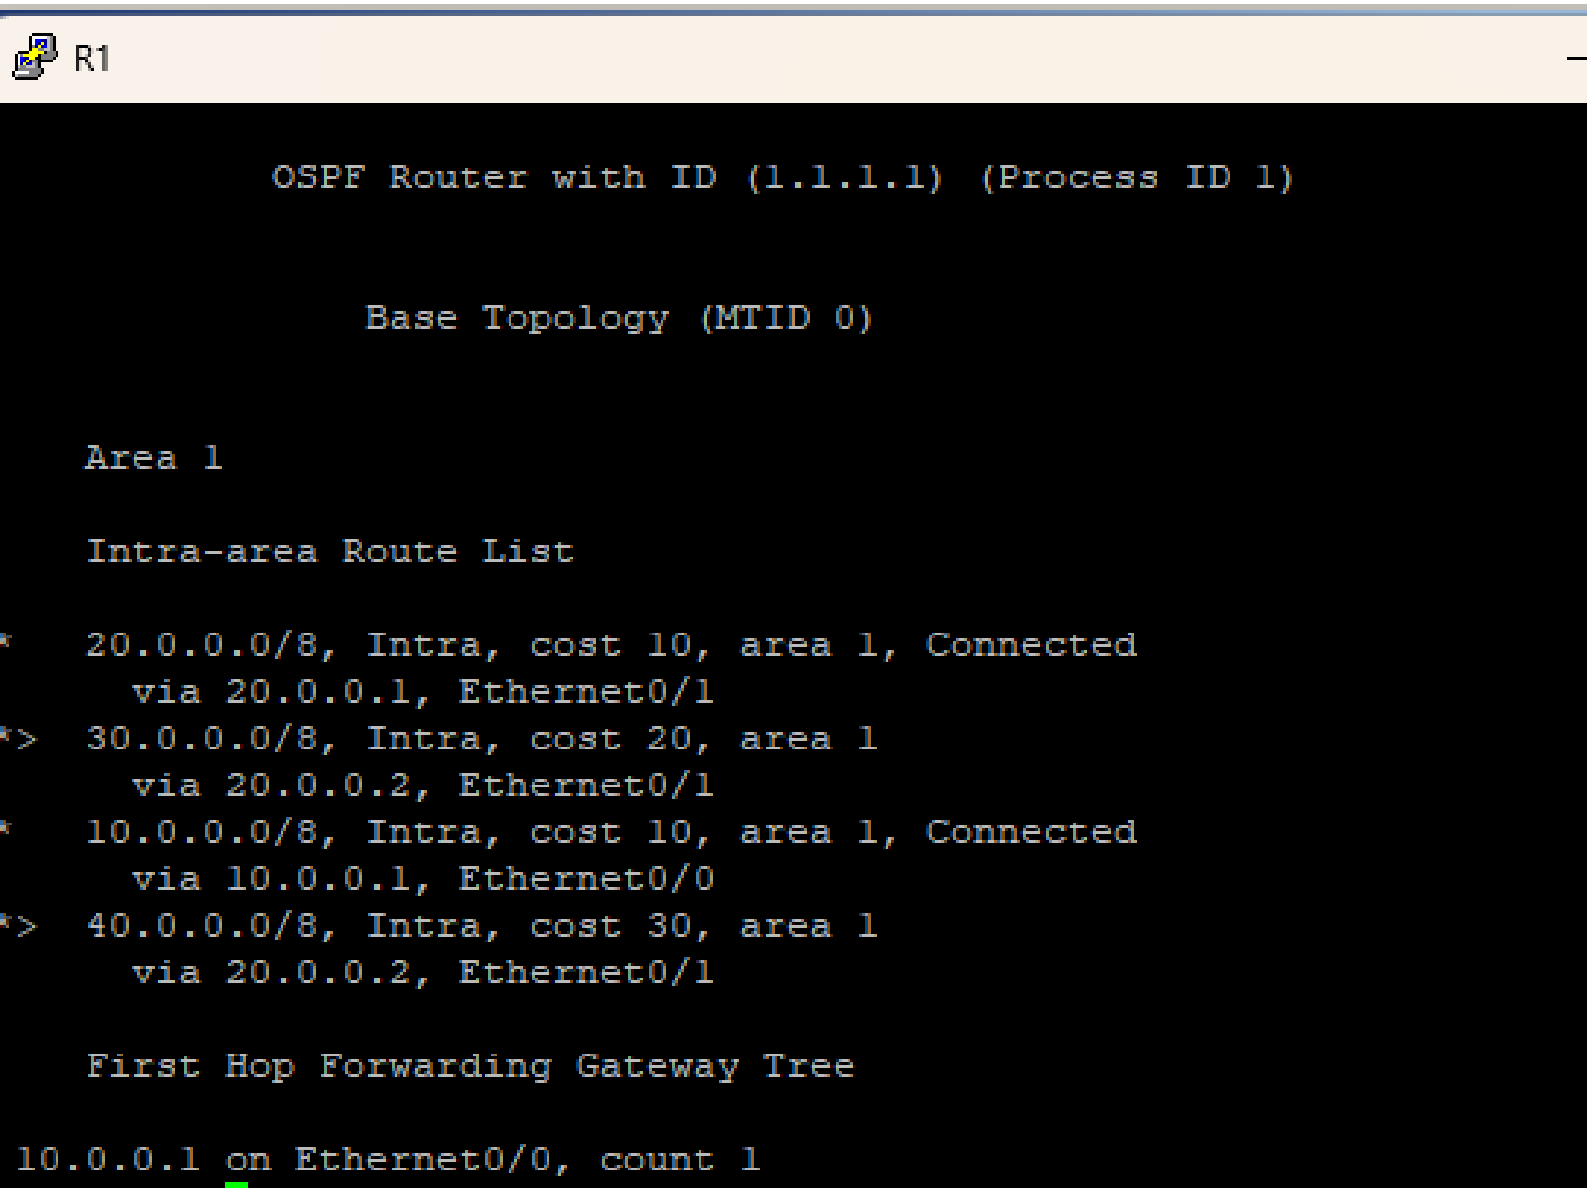

QEMU (Win-1)
C:\WINDOWS\system32\cmd.exe
Windows IP Configuration
Ethernet adapter Local Area Connection:
Connection-specific DNS Suffix . :
IP Address. . . . . : 10.0.0.10
Subnet Mask . . . . . : 255.0.0.0
Default Gateway . . . . . : 10.0.0.1
C:\Documents and Settings\user>ping 40.0.0.10
Pinging 40.0.0.10 with 32 bytes of data:
Reply from 40.0.0.10: bytes=32 time=2ms TTL=125
Reply from 40.0.0.10: bytes=32 time=1ms TTL=125
Reply from 40.0.0.10: bytes=32 time=1ms TTL=125
Reply from 40.0.0.10: bytes=32 time=1ms TTL=125
Ping statistics for 40.0.0.10:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 1ms, Maximum = 2ms, Average = 1ms
C:\Documents and Settings\user>


R1
OSPF Router with ID (1.1.1.1) (Process ID 1)
Base Topology (MTID 0)
Area 1
Intra-area Route List
* 20.0.0.0/8, Intra, cost 10, area 1, Connected
via 20.0.0.1, Ethernet0/1
*> 30.0.0.0/8, Intra, cost 20, area 1
via 20.0.0.2, Ethernet0/1
* 10.0.0.0/8, Intra, cost 10, area 1, Connected
via 10.0.0.1, Ethernet0/0
*> 40.0.0.0/8, Intra, cost 30, area 1
via 20.0.0.2, Ethernet0/1
First Hop Forwarding Gateway Tree
10.0.0.1 on Ethernet0/0, count 1

R2

```
          OSPF Router with ID (2.2.2.2) (Process ID 2)


              Base Topology (MTID 0)

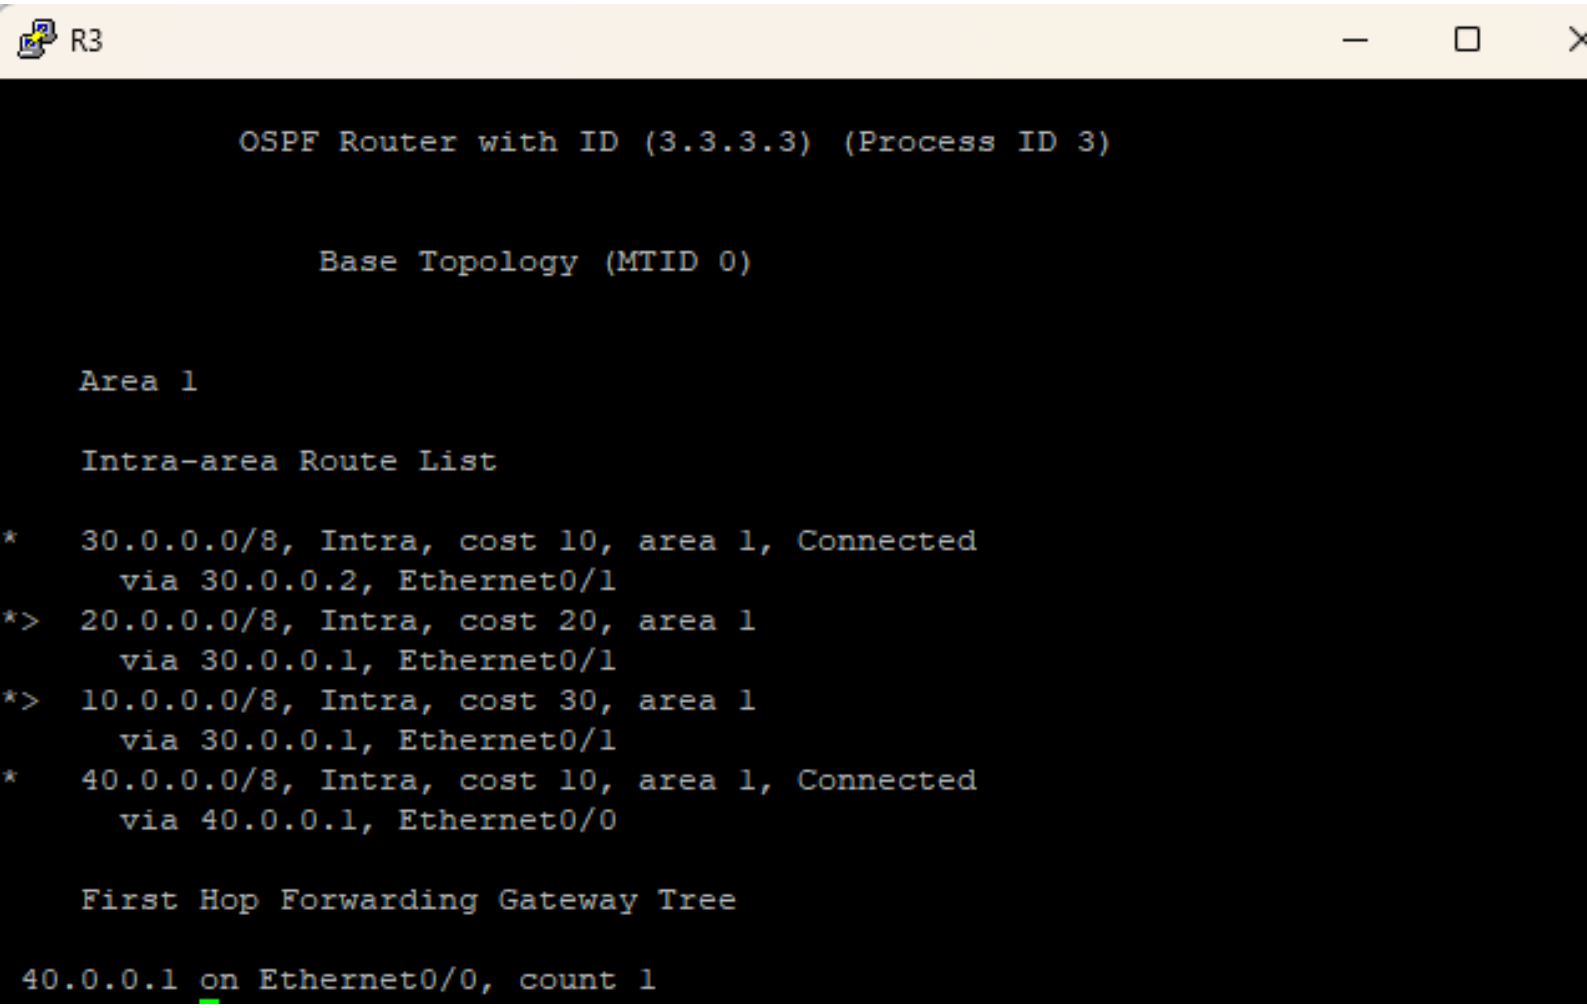

    Area 1

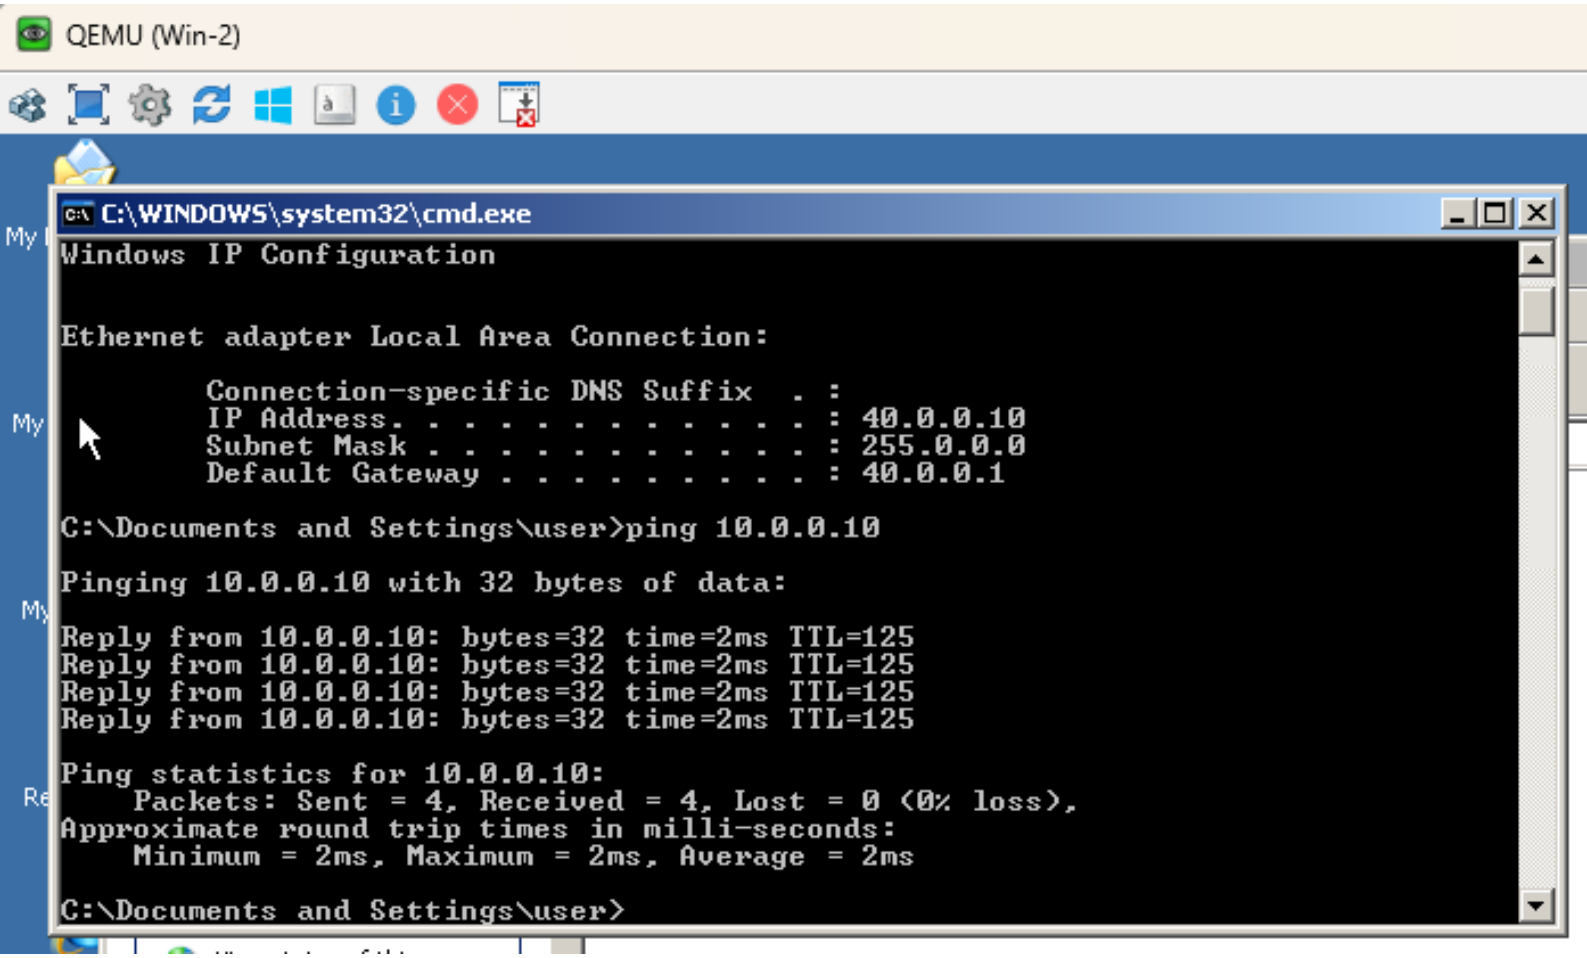
    Intra-area Route List

*   30.0.0.0/8, Intra, cost 10, area 1, Connected
      via 30.0.0.1, Ethernet0/1
*   20.0.0.0/8, Intra, cost 10, area 1, Connected
      via 20.0.0.2, Ethernet0/0
*>  10.0.0.0/8, Intra, cost 20, area 1
      via 20.0.0.1, Ethernet0/0
*>  40.0.0.0/8, Intra, cost 20, area 1
      via 30.0.0.2, Ethernet0/1

    First Hop Forwarding Gateway Tree

 20.0.0.1 on Ethernet0/0, count 1
```


R3
OSPF Router with ID (3.3.3.3) (Process ID 3)
Base Topology (MTID 0)
Area 1
Intra-area Route List
* 30.0.0.0/8, Intra, cost 10, area 1, Connected
via 30.0.0.2, Ethernet0/1
*> 20.0.0.0/8, Intra, cost 20, area 1
via 30.0.0.1, Ethernet0/1
*> 10.0.0.0/8, Intra, cost 30, area 1
via 30.0.0.1, Ethernet0/1
* 40.0.0.0/8, Intra, cost 10, area 1, Connected
via 40.0.0.1, Ethernet0/0
First Hop Forwarding Gateway Tree
40.0.0.1 on Ethernet0/0, count 1


QEMU (Win-2)
C:\WINDOWS\system32\cmd.exe
Windows IP Configuration
Ethernet adapter Local Area Connection:
Connection-specific DNS Suffix . :
IP Address. . . . . : 40.0.0.10
Subnet Mask . . . . . : 255.0.0.0
Default Gateway . . . . . : 40.0.0.1
C:\Documents and Settings\user>ping 10.0.0.10
Pinging 10.0.0.10 with 32 bytes of data:
Reply from 10.0.0.10: bytes=32 time=2ms TTL=125
Reply from 10.0.0.10: bytes=32 time=2ms TTL=125
Reply from 10.0.0.10: bytes=32 time=2ms TTL=125
Reply from 10.0.0.10: bytes=32 time=2ms TTL=125
Ping statistics for 10.0.0.10:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 2ms, Maximum = 2ms, Average = 2ms
C:\Documents and Settings\user>