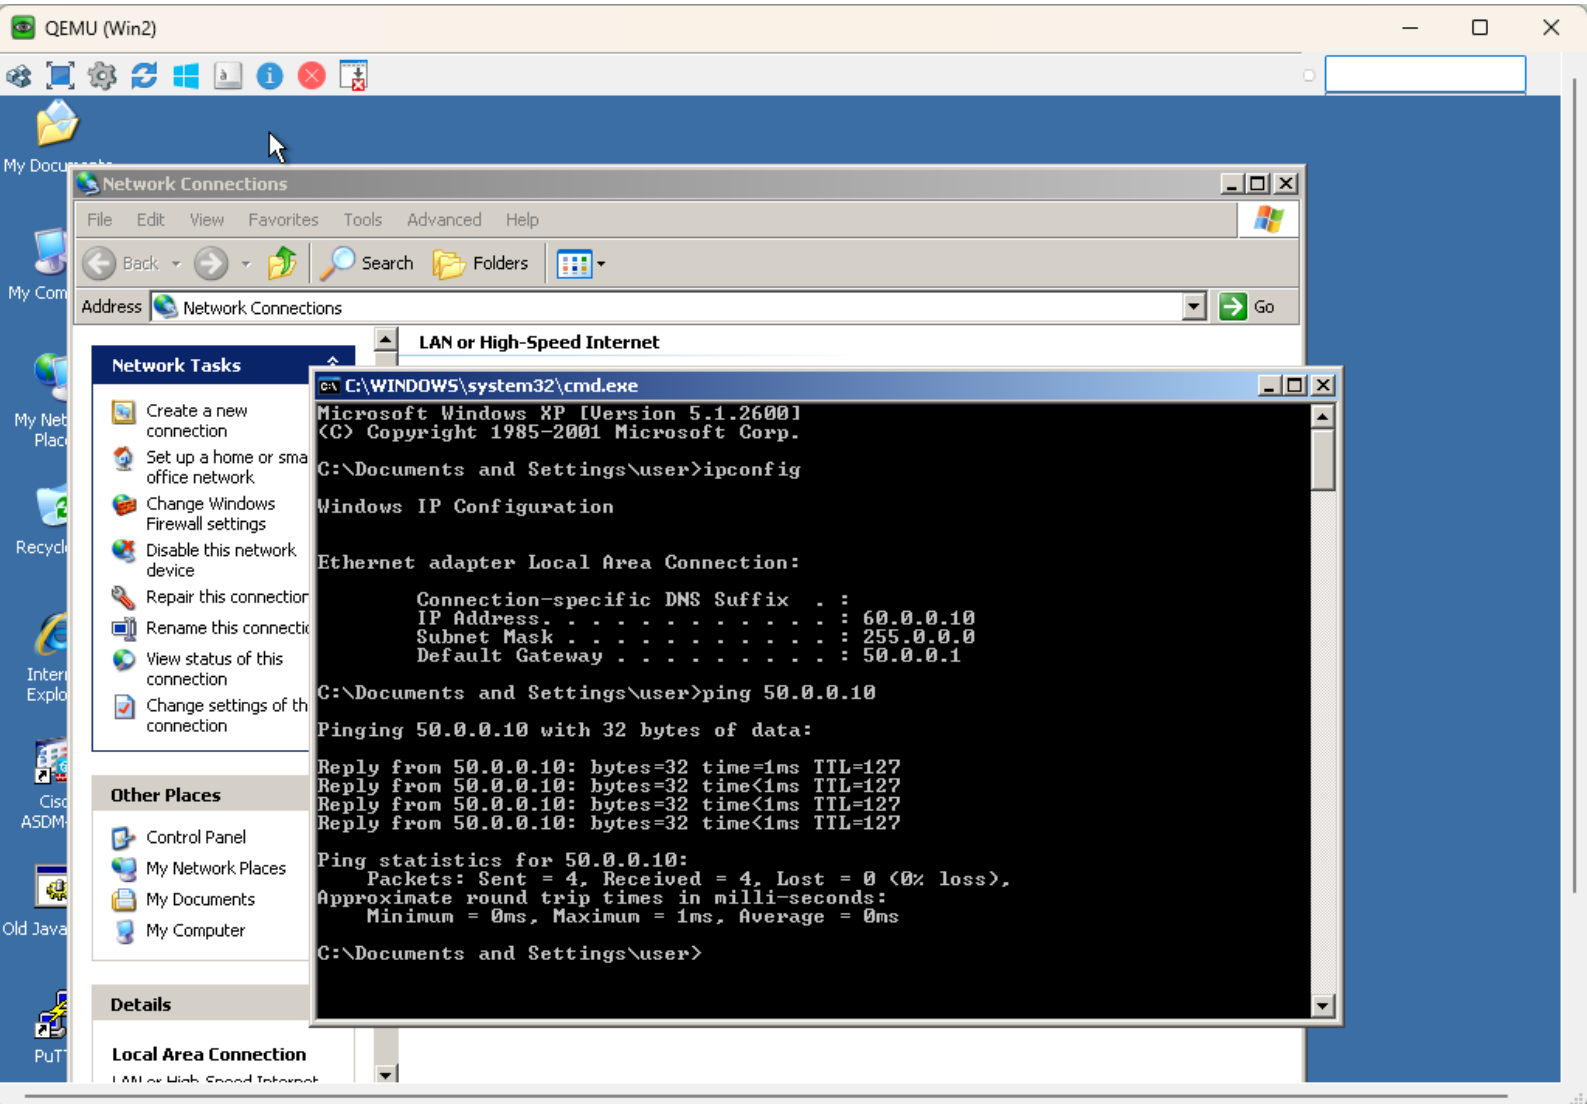
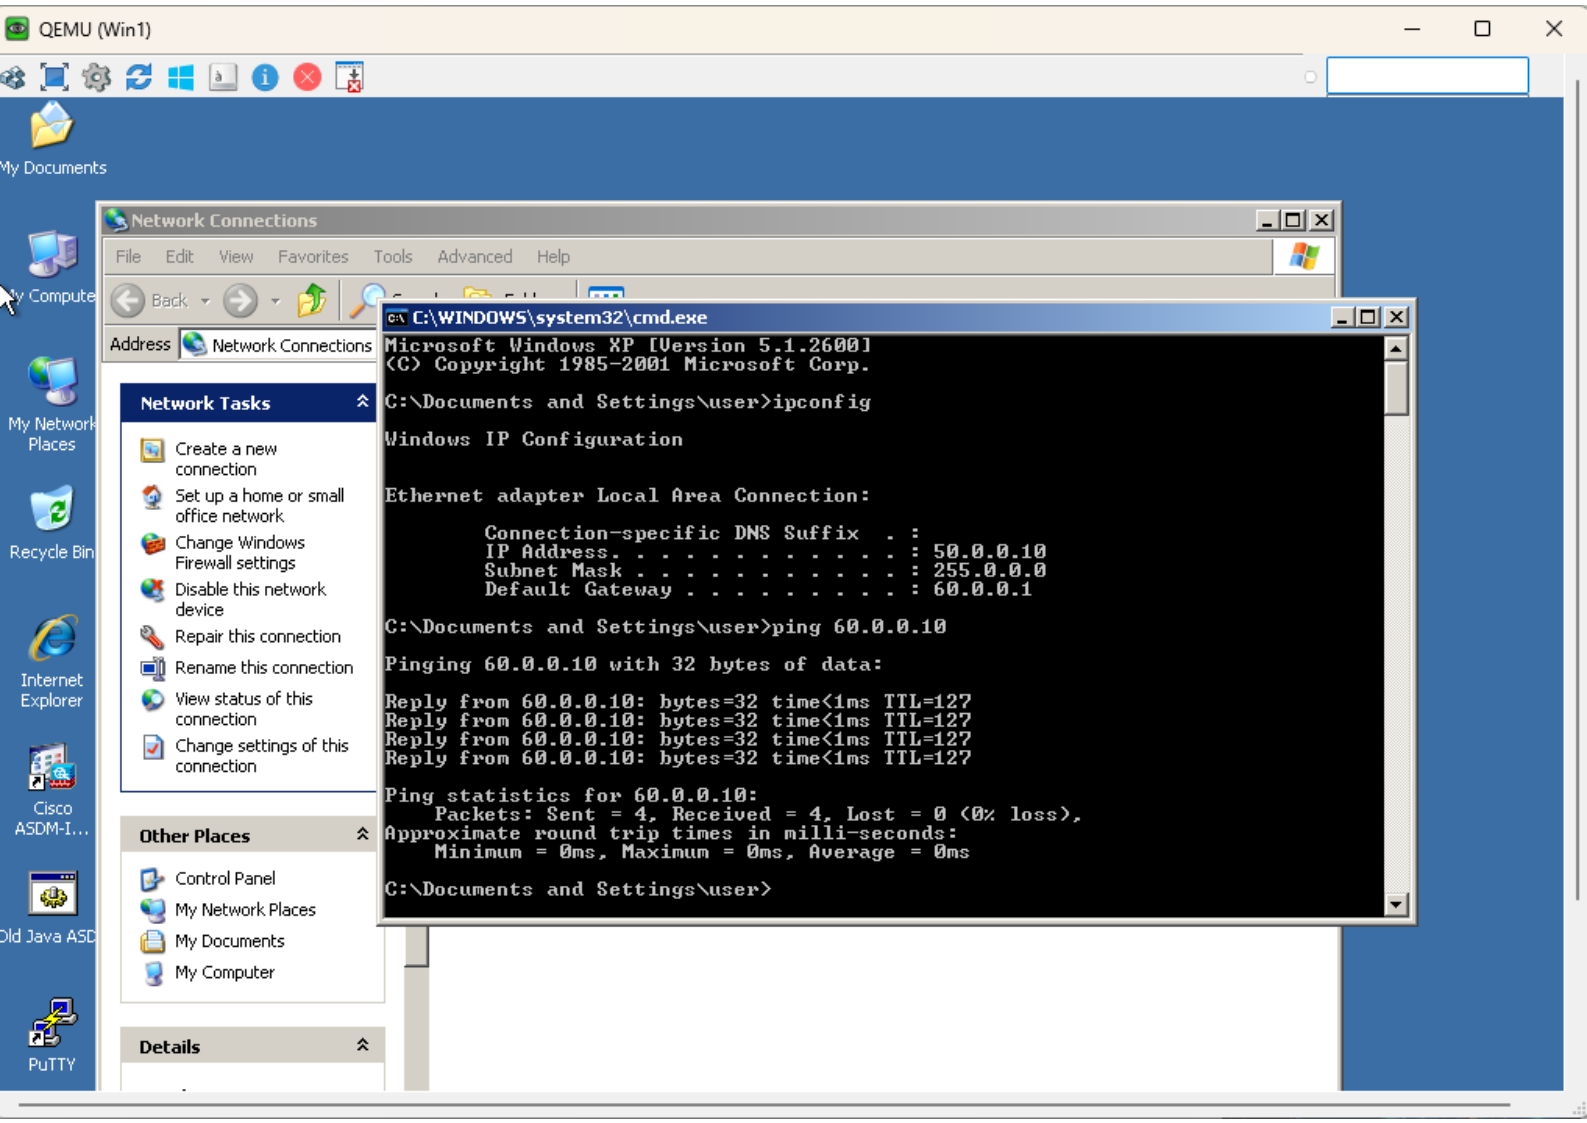
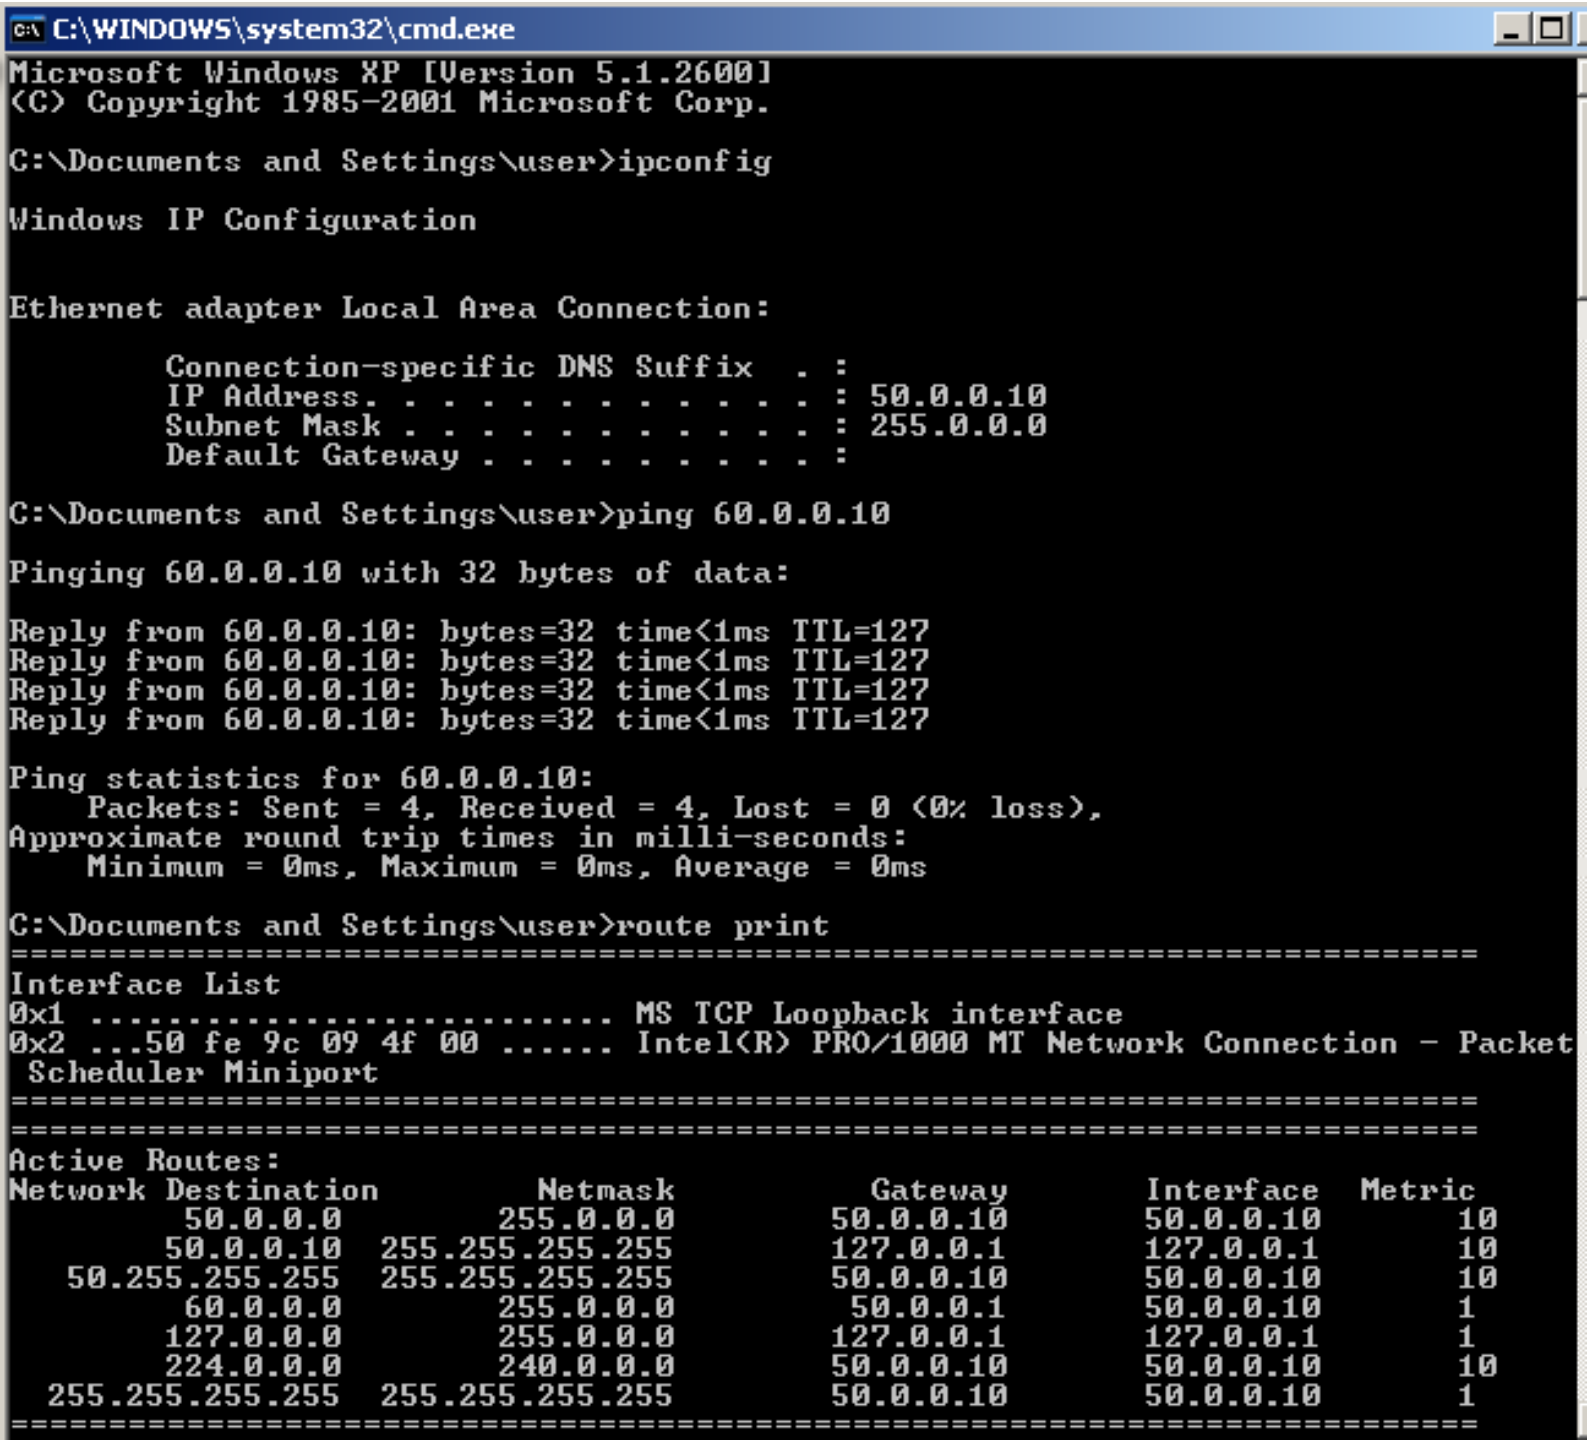
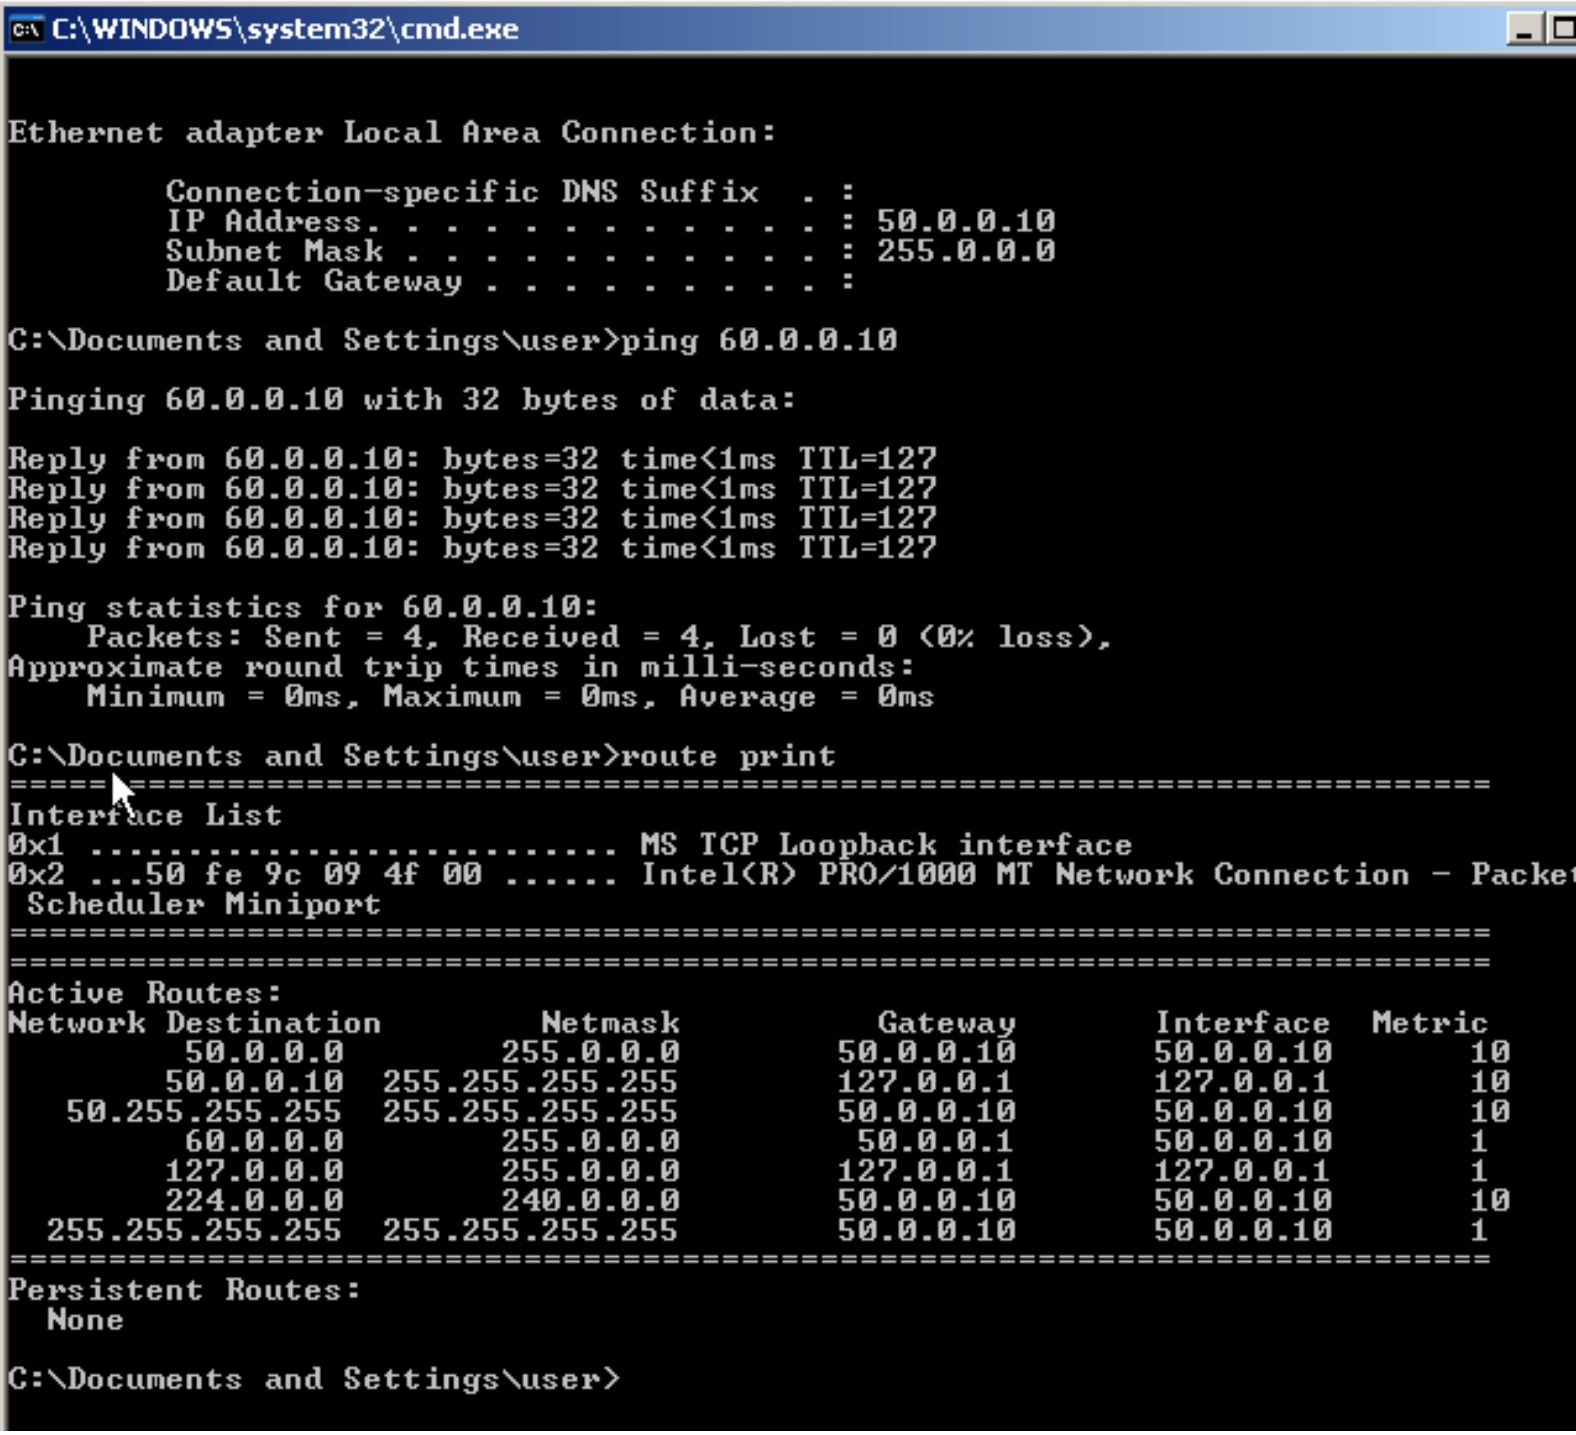
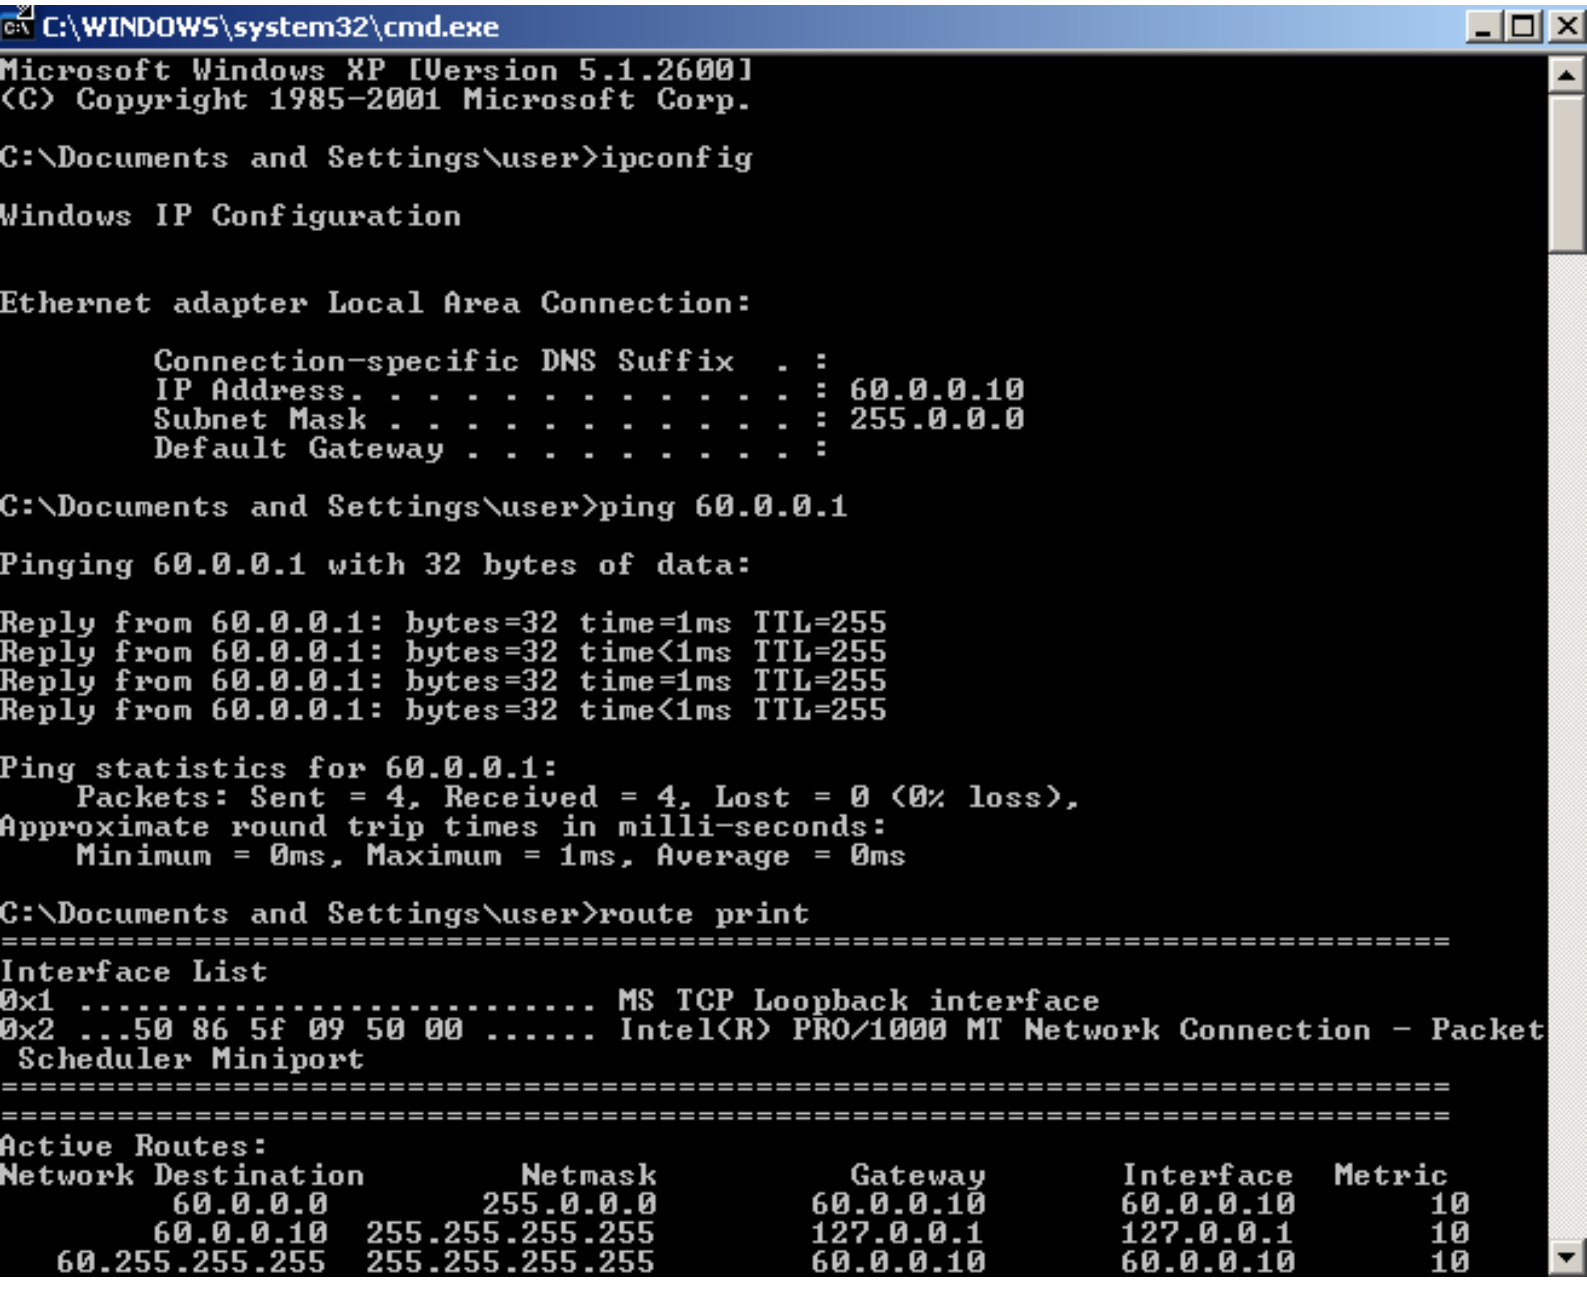
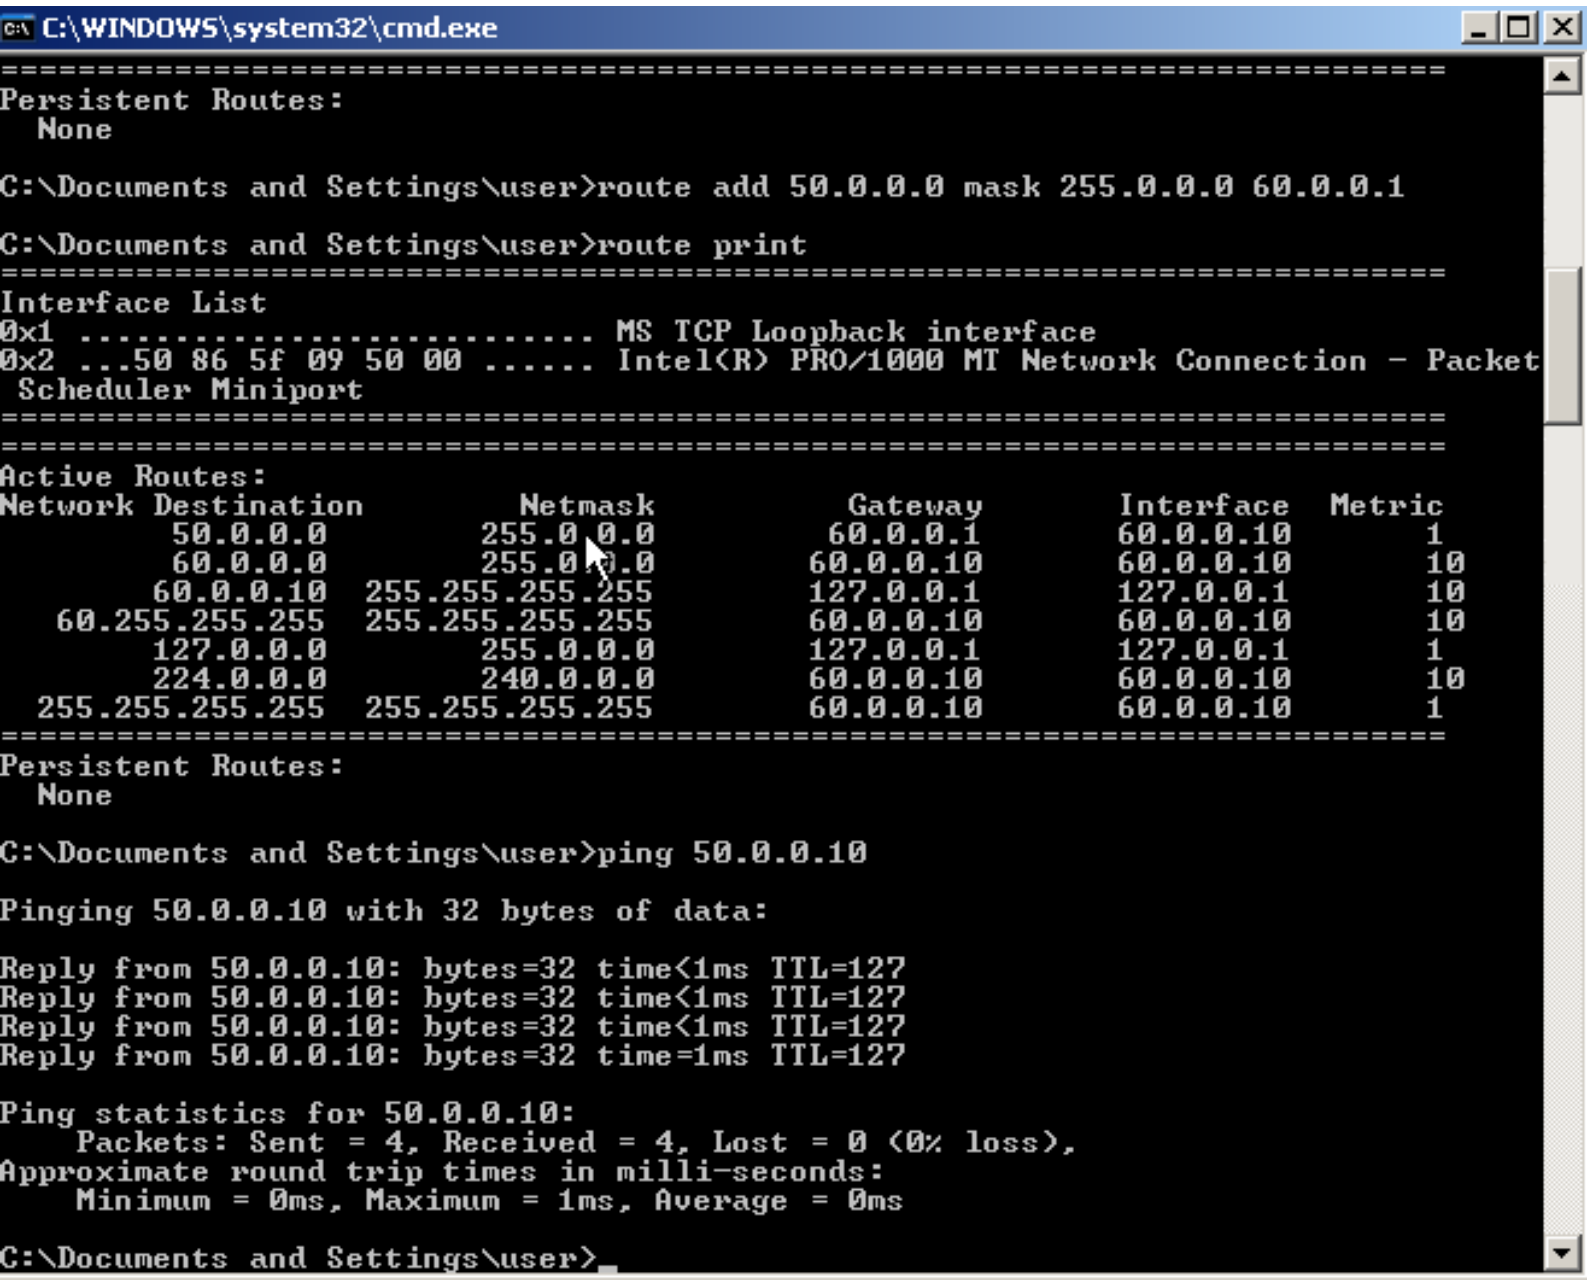

QEMU (Win2)
Network Connections
File Edit View Favorites Tools Advanced Help
Back Search Folders
Address Network Connections
Go
LAN or High-Speed Internet
Network Tasks
Create a new connection
Set up a home or sma office network
Change Windows Firewall settings
Disable this network device
Repair this connectior
Rename this connectic
View status of this connection
Change settings of th connection
Other Places
Control Panel
My Network Places
My Documents
My Computer
Details
Local Area Connection
C:\WINDOWS\system32\cmd.exe
Microsoft Windows XP [Version 5.1.2600]
(C) Copyright 1985-2001 Microsoft Corp.
C:\Documents and Settings\user>ipconfig
Windows IP Configuration
Ethernet adapter Local Area Connection:
Connection-specific DNS Suffix . :
IP Address. . . . . : 60.0.0.10
Subnet Mask . . . . . : 255.0.0.0
Default Gateway . . . . . : 50.0.0.1
C:\Documents and Settings\user>ping 50.0.0.10
Pinging 50.0.0.10 with 32 bytes of data:
Reply from 50.0.0.10: bytes=32 time=1ms TTL=127
Reply from 50.0.0.10: bytes=32 time<1ms TTL=127
Reply from 50.0.0.10: bytes=32 time<1ms TTL=127
Reply from 50.0.0.10: bytes=32 time<1ms TTL=127
Ping statistics for 50.0.0.10:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 1ms, Average = 0ms
C:\Documents and Settings\user>


QEMU (Win1)
My Documents
Network Connections
File Edit View Favorites Tools Advanced Help
Back
Address Network Connections
Network Tasks
Create a new connection
Set up a home or small office network
Change Windows Firewall settings
Disable this network device
Repair this connection
Rename this connection
View status of this connection
Change settings of this connection
Other Places
Control Panel
My Network Places
My Documents
My Computer
Details
My Network Places
Recycle Bin
Internet Explorer
Cisco ASDM-I...
Old Java ASD
PuTTY
C:\WINDOWS\system32\cmd.exe
Microsoft Windows XP [Version 5.1.2600]
(C) Copyright 1985-2001 Microsoft Corp.
C:\Documents and Settings\user>ipconfig
Windows IP Configuration
Ethernet adapter Local Area Connection:
Connection-specific DNS Suffix . :
IP Address. . . . . : 50.0.0.10
Subnet Mask . . . . . : 255.0.0.0
Default Gateway . . . . . : 60.0.0.1
C:\Documents and Settings\user>ping 60.0.0.10
Pinging 60.0.0.10 with 32 bytes of data:
Reply from 60.0.0.10: bytes=32 time<1ms TTL=127
Reply from 60.0.0.10: bytes=32 time<1ms TTL=127
Reply from 60.0.0.10: bytes=32 time<1ms TTL=127
Reply from 60.0.0.10: bytes=32 time<1ms TTL=127
Ping statistics for 60.0.0.10:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 0ms, Average = 0ms
C:\Documents and Settings\user>


C:\WINDOWS\system32\cmd.exe
Microsoft Windows XP [Version 5.1.2600]
(C) Copyright 1985-2001 Microsoft Corp.
C:\Documents and Settings\user>ipconfig
Windows IP Configuration
Ethernet adapter Local Area Connection:
Connection-specific DNS Suffix . :
IP Address. . . . . : 50.0.0.10
Subnet Mask . . . . . : 255.0.0.0
Default Gateway . . . . . :
C:\Documents and Settings\user>ping 60.0.0.10
Pinging 60.0.0.10 with 32 bytes of data:
Reply from 60.0.0.10: bytes=32 time<1ms TTL=127
Reply from 60.0.0.10: bytes=32 time<1ms TTL=127
Reply from 60.0.0.10: bytes=32 time<1ms TTL=127
Reply from 60.0.0.10: bytes=32 time<1ms TTL=127
Ping statistics for 60.0.0.10:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 0ms, Average = 0ms
C:\Documents and Settings\user>route print
Interface List
0x1 ..... MS TCP Loopback interface
0x2 ...50 fe 9c 09 4f 00 ..... Intel(R) PRO/1000 MT Network Connection - Packet
Scheduler Miniport
Active Routes:
Network Destination Netmask Gateway Interface Metric
50.0.0.0 255.0.0.0 50.0.0.10 50.0.0.10 10
50.0.0.10 255.255.255.255 127.0.0.1 127.0.0.1 10
50.255.255.255 255.255.255.255 50.0.0.10 50.0.0.10 10
60.0.0.0 255.0.0.0 50.0.0.1 50.0.0.10 1
127.0.0.0 255.0.0.0 127.0.0.1 127.0.0.1 1
224.0.0.0 240.0.0.0 50.0.0.10 50.0.0.10 10
255.255.255.255 255.255.255.255 50.0.0.10 50.0.0.10 1


C:\WINDOWS\system32\cmd.exe
Ethernet adapter Local Area Connection:
Connection-specific DNS Suffix . :
IP Address. . . . . : 50.0.0.10
Subnet Mask . . . . . : 255.0.0.0
Default Gateway . . . . . :
C:\Documents and Settings\user>ping 60.0.0.10
Pinging 60.0.0.10 with 32 bytes of data:
Reply from 60.0.0.10: bytes=32 time<1ms TTL=127
Reply from 60.0.0.10: bytes=32 time<1ms TTL=127
Reply from 60.0.0.10: bytes=32 time<1ms TTL=127
Reply from 60.0.0.10: bytes=32 time<1ms TTL=127
Ping statistics for 60.0.0.10:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 0ms, Average = 0ms
C:\Documents and Settings\user>route print
Interface List
0x1 ..... MS TCP Loopback interface
0x2 ...50 fe 9c 09 4f 00 ..... Intel(R) PRO/1000 MT Network Connection - Packet
Scheduler Miniport
Active Routes:
Network Destination Netmask Gateway Interface Metric
50.0.0.0 255.0.0.0 50.0.0.10 50.0.0.10 10
50.0.0.10 255.255.255.255 127.0.0.1 127.0.0.1 10
50.255.255.255 255.255.255.255 50.0.0.10 50.0.0.10 10
60.0.0.0 255.0.0.0 50.0.0.1 50.0.0.10 1
127.0.0.0 255.0.0.0 127.0.0.1 127.0.0.1 1
224.0.0.0 240.0.0.0 50.0.0.10 50.0.0.10 10
255.255.255.255 255.255.255.255 50.0.0.10 50.0.0.10 1
Persistent Routes:
None
C:\Documents and Settings\user>


C:\WINDOWS\system32\cmd.exe
Microsoft Windows XP [Version 5.1.2600]
(C) Copyright 1985-2001 Microsoft Corp.
C:\Documents and Settings\user>ipconfig
Windows IP Configuration
Ethernet adapter Local Area Connection:
Connection-specific DNS Suffix . :
IP Address. . . . . : 60.0.0.10
Subnet Mask . . . . . : 255.0.0.0
Default Gateway . . . . . :
C:\Documents and Settings\user>ping 60.0.0.1
Pinging 60.0.0.1 with 32 bytes of data:
Reply from 60.0.0.1: bytes=32 time=1ms TTL=255
Reply from 60.0.0.1: bytes=32 time<1ms TTL=255
Reply from 60.0.0.1: bytes=32 time=1ms TTL=255
Reply from 60.0.0.1: bytes=32 time<1ms TTL=255
Ping statistics for 60.0.0.1:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 1ms, Average = 0ms
C:\Documents and Settings\user>route print
Interface List
0x1 ..... MS TCP Loopback interface
0x2 ...50 86 5f 09 50 00 ..... Intel(R) PRO/1000 MT Network Connection - Packet
Scheduler Miniport
Active Routes:
Network Destination Netmask Gateway Interface Metric
60.0.0.0 255.0.0.0 60.0.0.10 60.0.0.10 10
60.0.0.10 255.255.255.255 127.0.0.1 127.0.0.1 10
60.255.255.255 255.255.255.255 60.0.0.10 60.0.0.10 10


C:\WINDOWS\system32\cmd.exe
Persistent Routes:
None
C:\Documents and Settings\user>route add 50.0.0.0 mask 255.0.0.0 60.0.0.1
C:\Documents and Settings\user>route print
Interface List
0x1 ..... MS TCP Loopback interface
0x2 ...50 86 5f 09 50 00 ..... Intel(R) PRO/1000 MT Network Connection - Packet
Scheduler Miniport
Active Routes:
Network Destination Netmask Gateway Interface Metric
50.0.0.0 255.0.0.0 60.0.0.1 60.0.0.10 1
60.0.0.0 255.0.0.0 60.0.0.10 60.0.0.10 10
60.0.0.10 255.255.255.255 127.0.0.1 127.0.0.1 10
60.255.255.255 255.255.255.255 60.0.0.10 60.0.0.10 10
127.0.0.0 255.0.0.0 127.0.0.1 127.0.0.1 1
224.0.0.0 240.0.0.0 60.0.0.10 60.0.0.10 10
255.255.255.255 255.255.255.255 60.0.0.10 60.0.0.10 1
Persistent Routes:
None
C:\Documents and Settings\user>ping 50.0.0.10
Pinging 50.0.0.10 with 32 bytes of data:
Reply from 50.0.0.10: bytes=32 time<1ms TTL=127
Reply from 50.0.0.10: bytes=32 time<1ms TTL=127
Reply from 50.0.0.10: bytes=32 time<1ms TTL=127
Reply from 50.0.0.10: bytes=32 time=1ms TTL=127
Ping statistics for 50.0.0.10:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 1ms, Average = 0ms
C:\Documents and Settings\user>