WAXJET 510 (3D PRINTER)

AS Technology

Product Specification

Specification	Details
Printing Technology	MultiJet Printing (MJP)
Build Volume	289 * 289 * 100 mm
Printing Mode	XHD: 2900 * 2900 * 1700 dpi; layer thickness: 15 μm
Dimensional Accuracy	±0.04 mm / 20 mm
Power Supply	AC220-240V, 50Hz, 4KW
Equipment Dimensions	1352 * 775 * 1600 mm
Net Weight	480 kg
Gross Weight	630 kg
Package Size	1530 * 900 * 1837 mm
Slicing Software	WaxJetPrint
Supported File Format	.stl/ .slc
Email Notification	✓
Printhead	510-0ne Printhead / 400 - Three Printhead
Hard Disk Capacity	500 G
Connectivity	Network 10/100/1000 Ethernet / USB
Supported Operating System	Windows 7 / Windows 10 (64-bit)
Working Environment	Temperature: 18-260C, Humidity: 30-70%

WAXJET 530 (3D PRINTER)

AS Technology

Product Specification

Specification	Details
Printing Technology	MultiJet Printing (MJP)
Build Volume	289 * 208 * 150 mm
Number of Printheads	3 piezoelectric printheads
Dimensional Accuracy	20mm ±0.04mm
Resolution	2900 * 2900 * 1700 DPI, layer thickness: 15 μm
Material Utilization	Part wax utilization > 55%
Print Speed	25.5 mm/h with layer thickness of 15 μm
Slicing Software	Wax Jetprint
Supported Input Formats	stl, slc
Connectivity	Network 10/100/1000 Ethernet/USB/Wi-Fi
Supported Operating System	Windows 7 / Windows 10 (64bit)
Operating Environment	Temperature 18-26 deg C, humidity : 30-70%
Equipment Dimensions	1352 * 775 * 1600mm
Equipment Weight	480 kg
Packaging Dimensions	1530 * 900 * 1837mm
Packaging Weight	630 kg

PROJET* MJP 2500W PRINTER

AS Technology

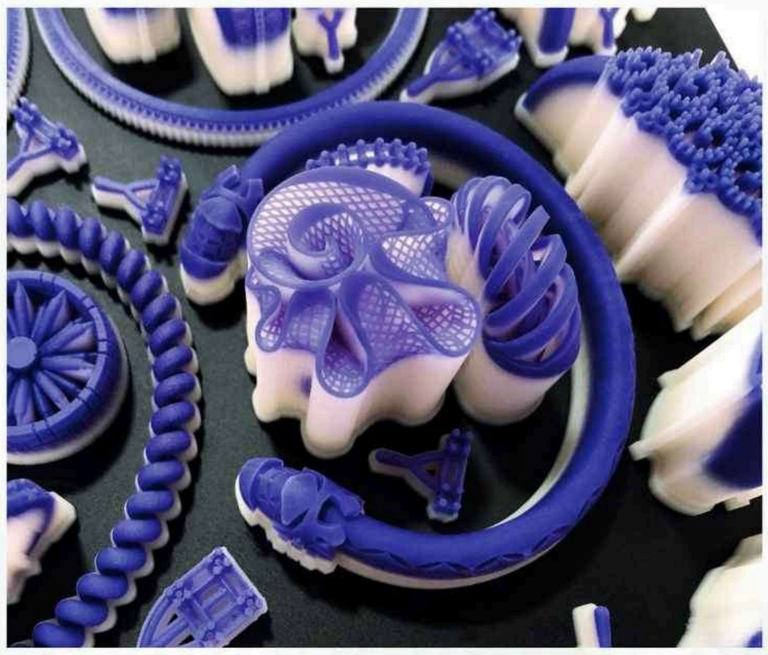

Hardware Specifications

Specification	Details
Dimensions (WxDxH) 3D Printer Crated 3D Printer Uncrated	1397 x 927 x 1314 mm (55 x 36.5 x 51.7 in) 1120 x 1070 mm (44.1 x 29.1 x 42.1 in)
3D Printer Crated 3D Printer Uncrated	325 kg (716 lb) 211 kg (465 lb)
Electrical	100-127 VAC, 50/60 Hz, single-phase, 15A 200-240 50 Hz, single-phase, IOA Single C14 receptacle
Operating Temperature Range	18-280C (64-8200, reduced print speed at > (770F)
Operating Humidity	30-70% relative humidity
Noise	< 65 dBa estimated (at medium fan setting)
Certifications	CE

Printing Specifications

Specification	Details
Net Build Volume (xyz)1	1 294 x 211 x 144 mm (11.6x8.3x5.6 in)
Accuracy (typical)2	±0.0508 mm/25.4 mm (±0.002 Win) of part dimensioh typical for any single printer ±0.1016 mm/25.4 mm (±0.004 in/in) of part Dimension across printer population

ZCZB-BS3(400) (3D PRINTER)

AS Technology

Product Specifications

Specification	Details
Molding method	MJP
Molding size	400* 210* 144mm
Printing mode: XHD	XHD: 28880*2880*1700 & 2880*3400mm DPI: 7.5μ/15μ
Dimension accuracy	±0.04mm/20mm
Power supply	AC220-240V, 50HZ, 3KW
Overall size	1500*800*1400mm
Overall weight	450KG
Package size	1900*1000*1650mm (3.135cbm) 20ft container can loading 6set
Gross weight	530KG
Application software	Wukong (Self-develop software)
Data support format	.stl/.slc
E-mail notify	Applicable
Disk Capacity	500G
Network connection	Network 10/100/100 ethernet/ USB
Customer operation system	Windows 7/Windows 10 (64bit)
Operation environment	18-28 deg C / 30-70% humidity
Head Qty	3pcs of Xaar's Head
Build material	3D-ZB-ZT N.W.: 1.5kg/bottle (2 material bins, each device, auto reloading)
Support material	3D-ZB-ZC N.W.: 1.6kg/bottle (2 material bins, each device, auto reloading)

ADVANCE 3D MATRIX

AS Technology

Printing Specifications

Category	Indicator Name	Model Wax	Support Wax
Basic Properties	Material Name Color Net Weight Density (g/cm') at 95°C (Equid) Melting point range (°C)	JW300-GP Purple 1.17kg/bottle 0.74 65-75°C	JW100-G White 1,30kg/bottle 0.86 55-65°C
Mechanical Properties	Volume shrinkage Linear shrinkage Needle Puncture Hardness	1.11% 0.70% 11	/ / /
Printing Permormance	Print layer thicknes (μm) Support removal method Ash content	16-32 μm Not applicable >0.01%	16-32 μm Solvent soluble or hot melt
Compatibility	Compatible Printer Models	Elite series and other mainstream brands	Elite series and other mainstream brands
Safety and Environmental Protection	Biodegradability	None	Partially degradable
Storage Conditions	Optimum storage temperature (°C) Shelf life (years)	0-25°C 3 years	15-25°C 3 years

PLEMPIRE PL3000

AS Technology

Product Specification

Specification	Details
Code	PL3000
Building Size	294 x 212 x 150 mm
Molding Range	1200 x 1200 x 1600 dpi, (3200dpi 8μm/1600dpi 16μm/800dpi 32μm)
Resolution Ratio	± 0.08 mm per 20 mm of part dimension XY Pixel 7.6mm The Z Axis Pixel STL， SLC， OBJ
Projector Resolution	1310 x 770 x 1670 mm
Accuracy Rating	220-240 VAC, 50/60 Hz, 15 A
Lift Height Gross weight	630kg
Net weight	480kg
Printing Speed	220-240 VAC, 50 Hz, 10 A, Single C14 Socket

Smart Solutions for a Smarter Future

PLEMPIRE PL2000 Plus

AS Technology

Product Specification

Specification	Details
Build volume	294 x 212 x 150 mm
Printing Mode	XHD Printing Mode 1200 x 1200 x 1600 dpi, 16 µm layers
Accuracy	± 0.1016 mm per 25.4 mm of part dimension
XHD Build speed in Z	Single Lane: 7.50 (mm/hr) Two Lanes: 3.50 (mm/hr) Three Lanes: 2.40 (mm/hr)
File format	STL, SLC, OBJ, AMF, MJPDDD
Material Package	1.2kg bulid, 1.35kg support bottles: maximum machine capacity-2bulid & 2 support bottles
Machine size	1272 x 780 x 1210 mm
Machine weight	Gross Weight: 420 KGS, Net Weight: 320 KGS
Current and voltage	220-240 VAC, 50/60 Hz, 15 A
Input/Output	220-240 VAC, 50 Hz , 10 A, Single C14 Socket
Warranty	1 Year

PLEMPIRE PL6100

AS Technology

Product Specification

Specification	Details
Type	3D
Building Size	290 x 207 x 100 mm
Molding Range	2900 x 2900 x 1700 dpi , Layer thickness: 15 µm.
Resolution Ratio	± 0.04 mm per 20 mm of part dimension The Z Axis Pixel STL, SLC, OBJ
Projector Resolution	1310 x 770 x 1670 mm
Accuracy Rating	220-240 VAC, 50/60 Hz, 15 A
Lift Height Gross weight	630kg, Net weight: 480kg
Printing Speed	220-240 VAC, 50 Hz, 10 A, Single C14 Socket