


Capacities & Media	Filter Area (ft <sup>2</sup> )	Min Flow (gpm)	Max Flow (gpm)	Perlite (lb)
SP-33-36-732	287	216	604	35
SP-39-36-948	372	279	782	44
SP-43-36-1182	464	348	975	56
SP-47-36-1440	565	424	1,188	69
SP-50-36-1698	667	500	1,400	81
SP-55-36-2076	815	611	1,712	98

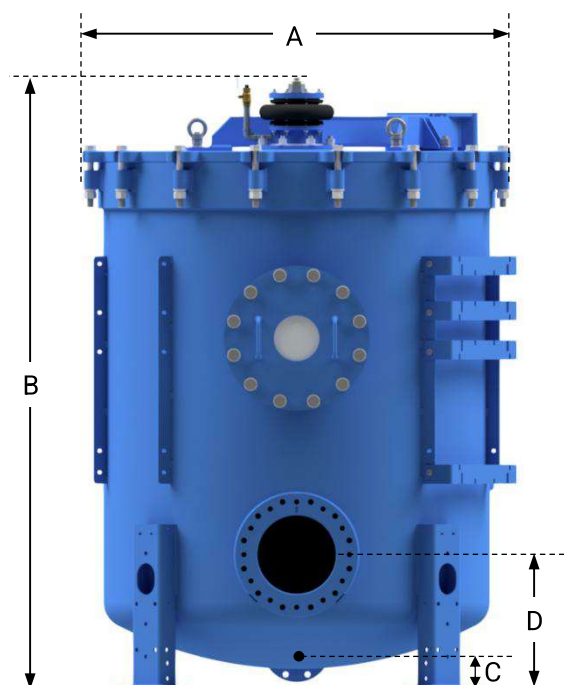


Certified to  
NSF/ANSI/CAN 50

Connection Sizes	Inlet/Outlet (in)	Drain (in)
SP-33-36-732	6	3
SP-39-36-948	8	4
SP-43-36-1182	8	4
SP-47-36-1440	8	4
SP-50-36-1698	10	4
SP-55-36-2076	10	4

Size & Weights	Capacity (gal)	Shipping Wt. (lb)	Operating Wt. (lb)
SP-33-36-732	230	1,955	3,900
SP-39-36-948	337	2,545	5,400
SP-43-36-1182	404	2,820	6,240
SP-47-36-1440	467	3,210	7,170
SP-50-36-1698	545	3,540	8,160
SP-55-36-2076	652	4,030	9,565

Dimensions	A (in)	B (in)	C (in)	D (in)
SP-33-36-732	38.4	79.5	5.2	15.8
SP-39-36-948	45.5	79.3	5.5	18.0
SP-43-36-1182	49.0	79.9	5.5	18.5
SP-47-36-1440	52.7	79.3	5.5	19.0
SP-50-36-1698	56.0	80.0	5.5	17.8
SP-55-36-2076	61.2	80.4	5.5	18.4

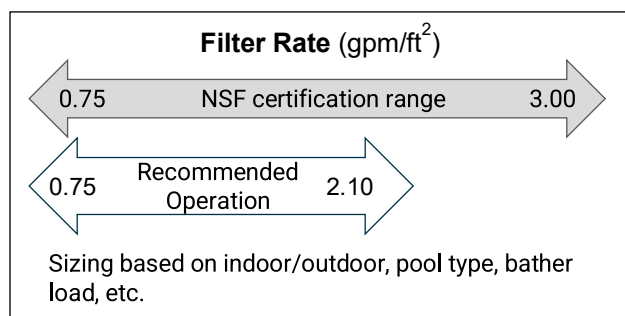

#### Notes

- Filter Area based on uncoated flex tubes.
- All models NSF 50 Certified to 3.00 gpm/ft<sup>2</sup>.
- Minimum and Maximum Flowrates based on Neptune Benson recommended filter rates 0.75 - 2.10 gpm/ft<sup>2</sup>.
- 16" clearance above filter recommended for service access.
- Inlet and Outlet Sizes based on 10 ft/s maximum pipe velocity.

Xylem  
334 Knight St Ste 3100  
Warwick, RI 02886 USA

Tel +1 800.832.8002  
Tel +1 401.821.2200  
xylem.com