

Capacities & Media

| | Filter Area (ft ²) | Min Flow (gpm) | Max Flow (gpm) | Perlite (lb) |
|---------------|-----------------------------------|-------------------|-------------------|-----------------|
| SP-27-48-487 | 255 | 191 | 535 | 30 |
| SP-33-48-732 | 383 | 287 | 805 | 45 |
| SP-41-48-1038 | 543 | 408 | 1,141 | 64 |
| SP-49-48-1548 | 811 | 608 | 1,702 | 96 |
| SP-55-48-2076 | 1,087 | 815 | 2,283 | 128 |

Connection Sizes



| | Inlet/Outlet (in) | Drain (in) |
|---------------|----------------------|---------------|
| SP-27-48-487 | 6 | 3 |
| SP-33-48-732 | 8 | 3 |
| SP-41-48-1038 | 8 | 4 |
| SP-49-48-1548 | 10 | 4 |
| SP-55-48-2076 | 12 | 4 |

Size & Weights

| | Capacity (gal) | Shipping Wt. (lb) | Operating Wt. (lb) |
|---------------|-------------------|----------------------|-----------------------|
| SP-27-48-487 | 159 | 1,650 | 2,970 |
| SP-33-48-732 | 250 | 1,800 | 3,880 |
| SP-41-48-1038 | 441 | 2,350 | 6,020 |
| SP-49-48-1548 | 615 | 3,320 | 8,440 |
| SP-55-48-2076 | 841 | 3,850 | 10,850 |

Dimensions

| | A (in) | B (in) | C (in) | D (in) |
|---------------|-----------|-----------|-----------|-----------|
| SP-27-48-487 | 33.1 | 97.5 | 83.5 | 28.1 |
| SP-33-48-732 | 38.5 | 103.3 | 89.8 | 31.0 |
| SP-41-48-1038 | 47.0 | 104.8 | 91.3 | 32.5 |
| SP-49-48-1548 | 54.1 | 109.3 | 95.8 | 35.0 |
| SP-55-48-2076 | 61.2 | 110.5 | 97.0 | 36.0 |

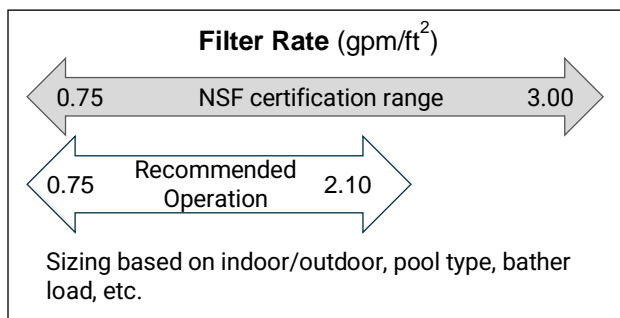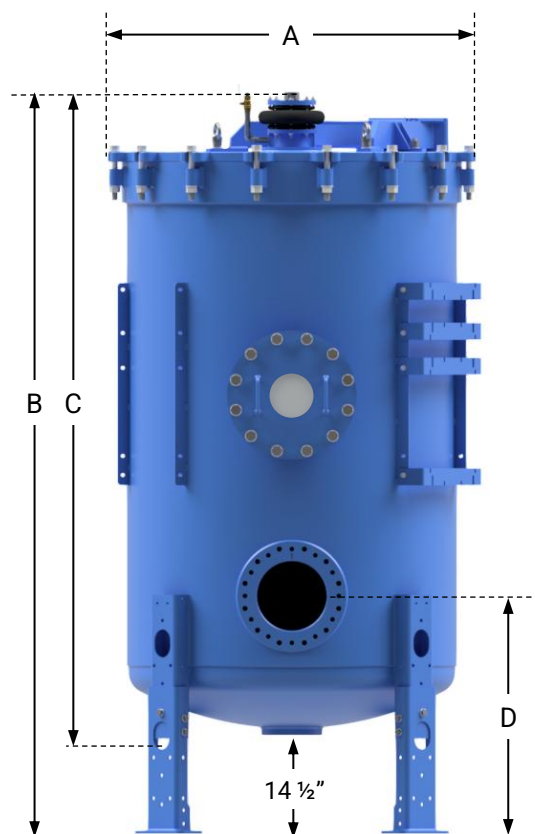

Notes

- Filter Area based on uncoated flextubes.
- All models NSF 50 Certified to 3.00 gpm/ft².
- Minimum and Maximum Flowrates based on Neptune Benson recommended filter rates 0.75 - 2.10 gpm/ft².
- 16" clearance above filter recommended for service access.
- Inlet and Outlet Sizes based on 10 ft/s maximum pipe velocity.

Xylem
334 Knight St Ste 3100
Warwick, RI 02886 USA

Tel +1 800.832.8002
Tel +1 401.821.2200
xylem.com