


Capacities & Media

	Filter Area (ft ²)	Min Flow (gpm)	Max Flow (gpm)	Perlite (lb)
SP-29-36-200	79	59	165	9
SP-29-36-250	98	74	206	11
SP-29-36-300	118	88	247	13
SP-29-36-350	137	103	289	16
SP-29-36-400	157	118	330	18
SP-29-36-450	177	133	371	20
SP-29-36-500	196	147	412	22

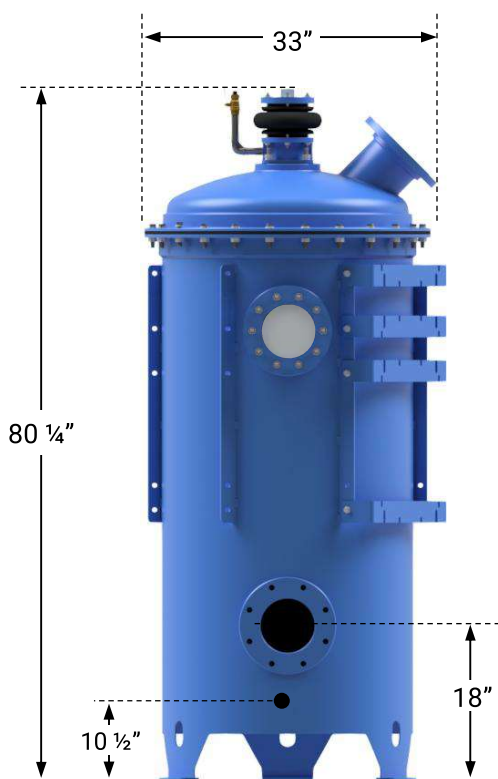


Connection Sizes

	Inlet/Outlet (in)	Drain (in)
SP-29-36-200	6	3
SP-29-36-250	6	3
SP-29-36-300	6	3
SP-29-36-350	6	3
SP-29-36-400	6	3
SP-29-36-450	6	3
SP-29-36-500	6	3

Size & Weights

	Capacity (gal)	Shipping Wt. (lb)	Operating Wt. (lb)
SP-29-36-200	181	735	2,250
SP-29-36-250	181	750	2,265
SP-29-36-300	181	765	2,280
SP-29-36-350	181	780	2,295
SP-29-36-400	181	795	2,310
SP-29-36-450	181	810	2,325
SP-29-36-500	181	825	2,340

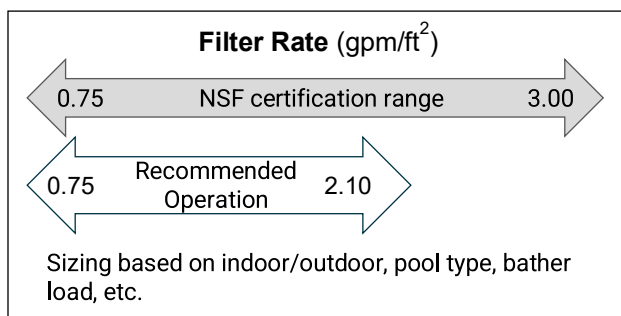

Notes

- Filter Area based on uncoated flextubes.
- All models NSF 50 Certified to 3.00 gpm/ft².
- Minimum and Maximum Flowrates based on Neptune Benson recommended filter rates 0.75 - 2.10 gpm/ft².
- 16" clearance above filter recommended for service access.
- Inlet and Outlet Sizes based on 10 ft/s maximum pipe velocity.
- 10½" height to center of drain connection.

Xylem
334 Knight St Ste 3100
Warwick, RI 02886 USA

Tel +1 800.832.8002
Tel +1 401.821.2200
xylem.com