


Capacities & Media

	Filter Area (ft ²)	Min Flow (gpm)	Max Flow (gpm)	Perlite (lb)
SP-27-48-487-R	255	191	535	30
SP-33-48-732-R	383	287	805	45
SP-41-48-1038-R	543	408	1,141	64
SP-49-48-1548-R	811	608	1,702	96
SP-55-48-2076-R	1,087	815	2,283	128

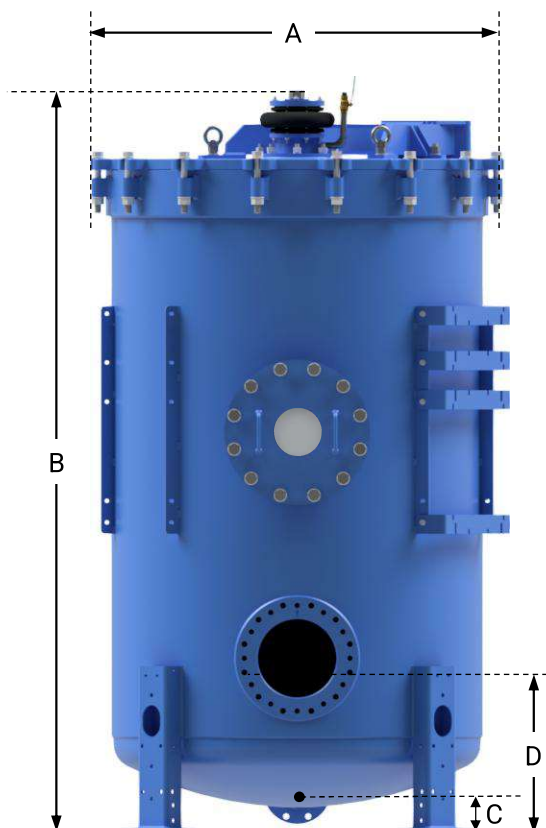

Connection Sizes

	Inlet/Outlet (in)	Drain (in)
SP-27-48-487-R	6	3
SP-33-48-732-R	8	3
SP-41-48-1038-R	8	4
SP-49-48-1548-R	10	4
SP-55-48-2076-R	12	4

Size & Weights


	Capacity (gal)	Shipping Wt. (lb)	Operating Wt. (lb)
SP-27-48-487-R	159	1,650	2,970
SP-33-48-732-R	250	1,800	3,880
SP-41-48-1038-R	441	2,350	6,020
SP-49-48-1548-R	615	3,320	8,440
SP-55-48-2076-R	841	3,850	10,850

Dimensions

	A (in)	B (in)	C (in)	D (in)
SP-27-48-487-R	33.6	84.8	4.8	15.6
SP-33-48-732-R	38.5	90.8	4.8	18.5
SP-41-48-1038-R	47.0	92.5	5.5	20.3
SP-49-48-1548-R	54.1	97.0	5.5	22.7
SP-55-48-2076-R	61.2	98.1	5.5	23.7



Certified to
NSF/ANSI/CAN 50

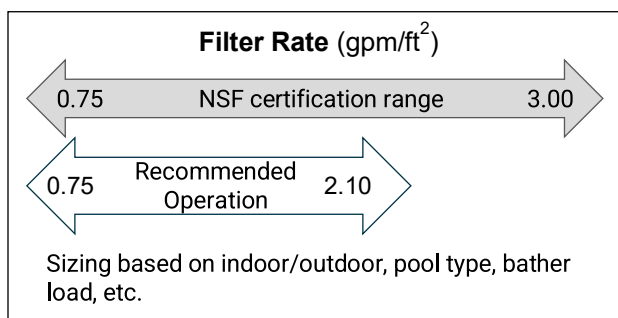

Notes

- Filter Area based on uncoated flextubes.
- All models NSF 50 Certified to 3.00 gpm/ft².
- Minimum and Maximum Flowrates based on Neptune Benson recommended filter rates 0.75 - 2.10 gpm/ft².
- 16" clearance above filter recommended for service access.
- Inlet and Outlet Sizes based on 10 ft/s maximum pipe velocity.

Xylem
334 Knight St Ste 3100
Warwick, RI 02886 USA

Tel +1 800.832.8002
Tel +1 401.821.2200
xylem.com