深圳市佑驰电子有限公司

Specification for Approval

产品名称：一体系列电感

规格型号：HCMA-0630-XXX-M-K

产品编号：

日　　期：2025-08-15

1、本承认书的内容更改需经过双方确认，任一方单独的修改均视为无效。

2、本承认书在送达客户后，请给予承认并即签回，如无签回下订单的，我司有权以此承认书标准生产，并表示购买方默认许可。

核准	审核	制作
	Aaron	Ada

http://www.szyouchi.com　　邮箱：chengjian@yc-ele.com

REVISION					
REV	DESCRIPTION	DATE	DESIGNED	CHECKED	APPROVED
A0	文件建立	2025/08/15	吕秀秀	Bowen	Darren

High Current, Power Inductors
HCMA-0630-XXX-M-K PowerChoke



Description

- Halogen Free
- 125 °C maximum total temperature operation
- Powder iron core material
- Magnetically shielded, low EMI
- High current carrying capacity, Low core losses
- Frequency range up to 5 MHz
- RoHS compliant

Applications

- Voltage Regulator Module (VRM)
- Multi-phase regulators
- Point-of-load modules
- Smart phone POL modules
- SSD modules
- Notebook regulators
- Battery power systems
- Graphics cards
- Data networking and storage systems

Environmental Data

•Storage temperature range: -55 ° C to +125 ° C

•Operating temperature range: -55 ° C to +125 ° C (ambient plus self-temperature rise)

•Solder reflow temperature: J- STD-020 D complian

Description		
HCMA-0630-R15-M-K Model	0.15μH Inductance Value	±20 % Inductance Tolerance


Global Part Number					
H C M A	0 6 3 0	R 1 5	M	K	
Product Series	Dimensions	Inductance Value	Tol.	shape	


Part Number	Inductance L0 A(uH)	Heat Rating Current DC I rms.(A)		Saturation Current DCI sat. (A)		DCR (mΩ)Typ	DCR (mΩ)Max
		Typ	Max	Typ	Max		
HCMA-0630-R15-M-K	0.15	38.0	33.0	45.0	41.0	0.9±5%	
HCMA-0630-R22-M-K	0.22	23.0	21.0	34.0	32.0	2.0	2.5
HCMA-0630-R33-M-K	0.33	21.0	20.0	25.0	22.0	2.8	3.4
HCMA-0630-R47-M-K	0.47	18.0	16.0	20.0	18.0	3.4	4.0
HCMA-0630-R68-M-K	0.68	16.0	14.5	17.0	15.0	4.7	5.3
HCMA-0630-1R0-M-K	1.00	12.0	11.0	15.0	13.5	6.7	7.4
HCMA-0630-1R5-M-K	1.50	10.0	9.00	14.0	12.0	10.2	12.1
HCMA-0630-2R2-M-K	2.20	8.0	7.50	10.0	9.0	13.5	15
HCMA-0630-3R3-M-K	3.30	6.50	6.00	9.5	8.5	19	22
HCMA-0630-4R7-M-K	4.70	5.50	5.00	6.5	5.5	28	33
HCMA-0630-5R6-M-K	5.60	5.50	5.00	6.0	5.2	39	42
HCMA-0630-6R8-M-K	6.80	4.50	4.20	6.0	5.0	43	50
HCMA-0630-100-M-K	10.0	4.0	3.5	5.5	4.5	62	68
HCMA-0630-150-M-K	15.0	3.0	2.5	4.5	4.0	110	140
HCMA-0630-220-M-K	22.0	2.5	2.0	3.0	2.5	150	190
HCMA-0630-330-M-K	33.0	2.1	1.8	2.5	2.0	215	258
HCMA-0630-470-M-K	47.0	1.9	1.6	1.8	1.6	250	300

Notes

1. All test data is referenced to 25 °C ambient
2. Operating temperature range - 55 °C to + 125 °C
3. Idc(A) :DC current (A) that will cause an approximate ΔT of 40 °C(reference ambient temperature is 25°C)
4. Isat(A) : DC current (A) that will cause L0 to dropapproximately30 %
5. The part temperature (ambient + temp rise) should not exceed 125 °C under worst case operating conditions. Circuit design , component placement , PWB trace size and thickness , airflow and other cooling provisions all affect the part temperature . Part temperature should be verified in the end applicat

•Dimensions-mm

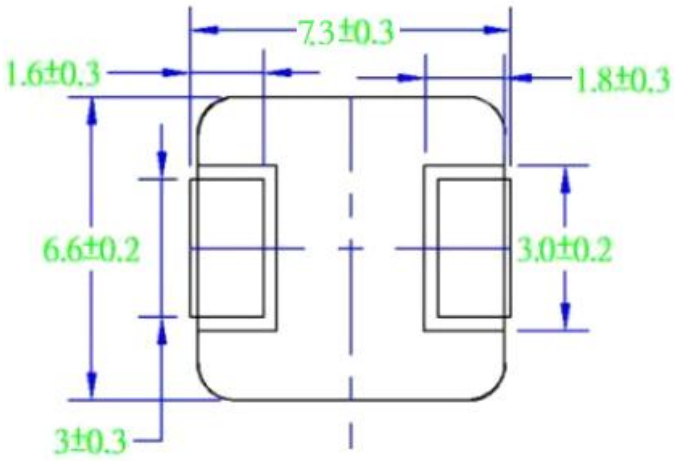

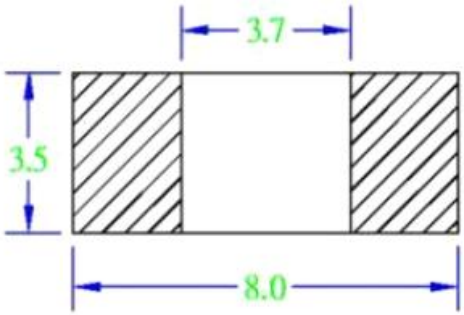

Recommend Land Pattern Dimensions

