©Trelleborg Printing Solutions 022015



vulcan Dimension


Claves de rendimiento

- Superf cie pulida para una rápida soltura y excelente reproducción de punto.
- Capa compresible mejorada para una carga consistente y mayor resistencia a la rotura.
- Compuesto superf cial compatible con tintas hibridas y convencionales.
- Flexible carcasa para más fácil instalación.

PRINCIPALES APLICACIONES

Maquinas de impresión de pliegos, Packaging, Impresión sobre metal

Vulcan Dimension esta disponible en 1,96 mm

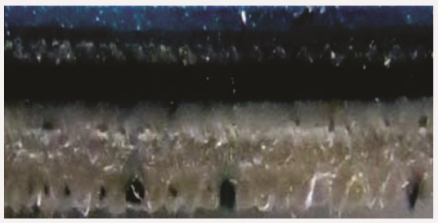

Vulcan Dimension

El producto de un vistazo

COMPATIBILIDAD DE TINTAS	Convencional – Hibridas
COLOR DE LA SUPERFICIE	Azul
ESPESOR NOMINAL (en mm)	1,96
VALOR PROMEDIO DE CARGA N/cm2 @ 23 mm	200
RUGOSIDAD SUPERFICIAL (Ra micrón)	0,8
ELONGACIÓN (%)	<7
RESISTENCIA A LA TRACCIÓN (N/mm)	>60
PROTECCIÓN A AGUA Y SOLVENTE	No
INFORMACIÓN ADICIONAL	
APLICACIONES	Compatibilidad de tinta: convencional/UV

PARA MAS DETALLES, DIRÍJASE CON EL GERENTE DE CUENTAS O ESCRIBANOS AL MAIL:
printing@trelleborg.com

The information contained in this document is intended to provide guidance. The information is NOT a specification and all figures in the document are nominal.
This document and the information it contains do not create any warranties for any product and Trelleborg Printing Solutions disclaims any warranty of merchantability or fitness for a particular purpose for the product described in this document. This document discloses information that is proprietary to Trelleborg Printing Solutions. The receipt or possession of the document does not confer any right to reproduce or disclose the document, any information contained in it, or any physical article or device, or to practice any method or process except by written agreement with Trelleborg Printing Solutions. Trelleborg Printing Solutions is committed to the ongoing development of its products. For that reason, Trelleborg Printing Solutions reserves the right to alter the specifications of its products without prior notice.