


Servo Motor

RDS51150-12V

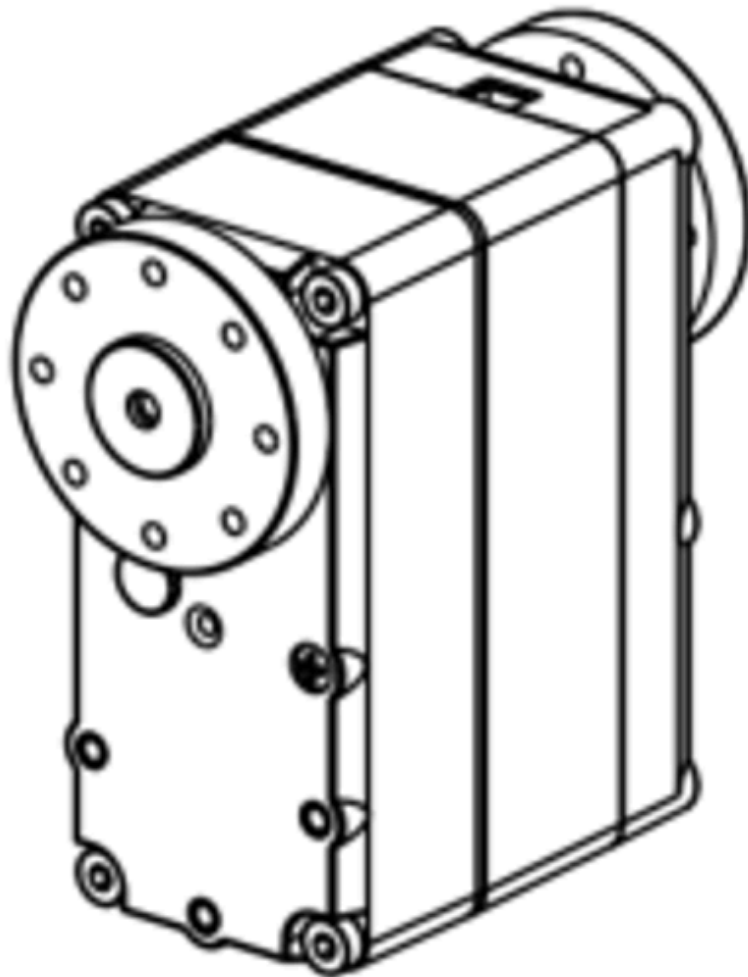

1.

No.	Item	Specification
1-1	Storage Temperature Range	-30℃～80℃
1-2	Operating Temperature Range	-15℃～70℃
1-3	Operating Voltage Range	9-12.6V

2. Mechanical Specification


No.	Item	Specification
2-1	Size	65*30*48mm
2-2	Weight	175g
2-3	Gear ratio	357
2-4	Bearing	Double bearing
2-5	Connector wire	300±5mm
2-6	Motor	3-pole(s)
2-7	Waterproof performance	No

3. Electrical Specification

No.	Operating Voltage	10V	12V	12.6V
3-1	Idle current(at stopped)	4mA	5mA	6mA
3-2	Operating speed (at no load)	0.24 sec/60°	0.21 sec/60°	0.19sec/60°
3-3	Stall torque (at locked)	150 kg-cm	165 kg-cm	173 kg-cm
3-4	Stall current (at locked)	7.4A	8.0A	8.3A

4. Control Specification

No.	Item	Specification
4-1	Control System	PWM(Pulse width modification)
4-2	Pulse width range	500～2500μsec
4-3	Neutral position	1500μsec
4-4	Running degree	180° or 270° (when 500～2500 μ sec)
4-5	Dead band width	3 μsec
4-6	Operating frequency	50-330Hz
4-7	Rotating direction	Counterclockwise (when 500～2500 μsec)

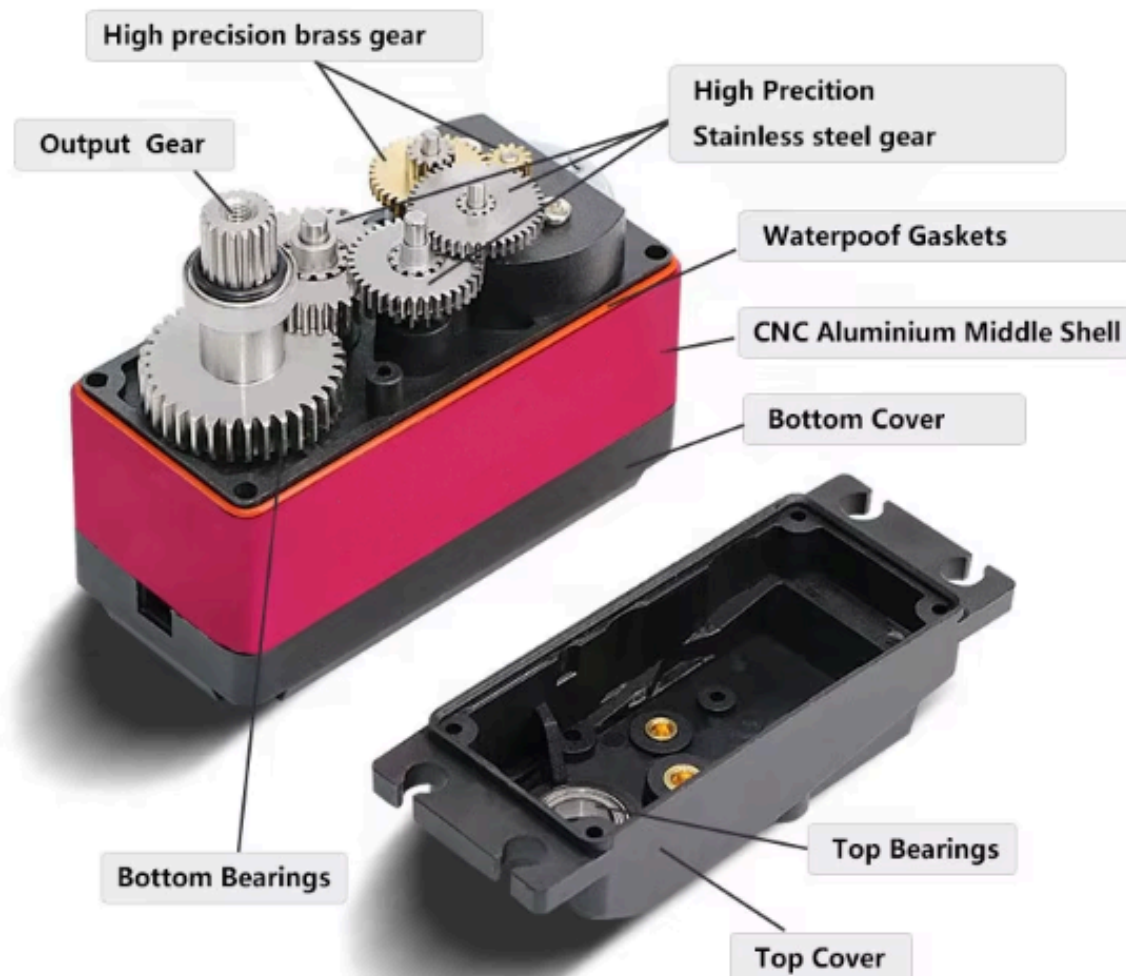

Specification:

- Size:65*30*48mm
- Weight:163g
- Wire length:600±5mm
- Speed: 0.24 sec/60°(10V),0.21 sec/60°(12V),0.19 sec/60°(12.6V)
- Torque:150 kg-cm(10V),165 kg-cm(12V),173 kg-cm(12.6V)
- Voltage: 9V-12.6V
- Dead Zoon setting:3 Microseconds


Features:

- Durable Metal Gear
- Dual Ball Bearing
- Programmable Digital Amplifier with Mosft Drive
- Bottom Side Axial Mount Hole
- Original factory product
- Less Noise
- Contains: Long Holder Aluminum & Short Holder Aluminum & Circle Holder-18T & Circle Holder -Orientation
- Angle:maximum 180 or 270 degree
- Mechanical Angle :360 degree
- (Plug/Output wheel/Radio control system compatible with Futaba JR Hitec)


(Product Name): RDS51150-12V (RED)

(Product Description): 12V 150kg Robot Digital Servo

(Drawing):

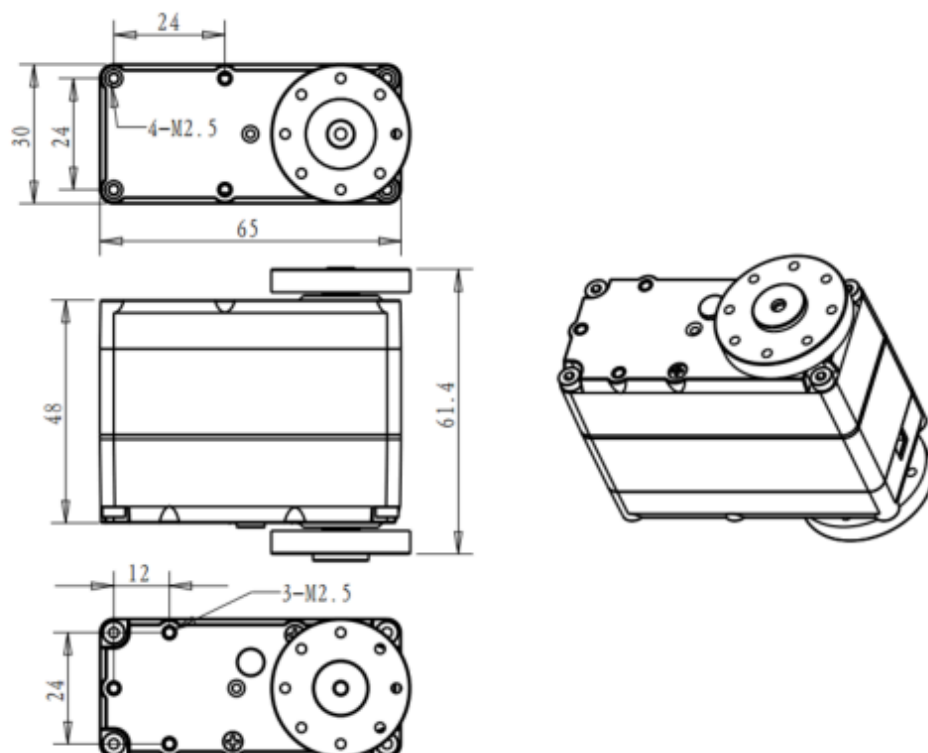

► Connector: JR-4pin-2.54mm

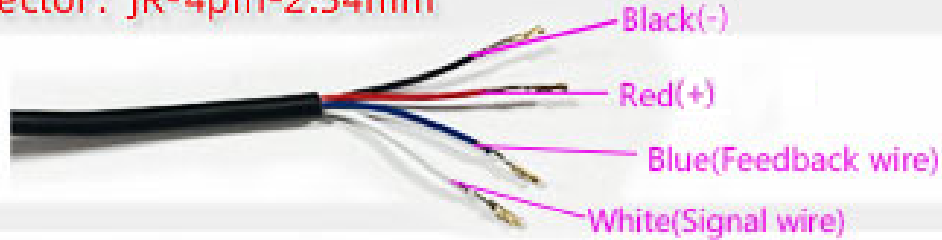

► Communication Interface: PWM

