

Desktop Printers

EZ300 series

Value driven and affordable.

EZ300 series offers robust mechanism and simple operation methods for printing retail, warehouses, logistic & transportation, government & administration labels and tags.



Sleek outlines and best choice for value.

- Dual sensors enable instant label / ribbon detection.
- 16MB SDRAM and 8 MB Flash memory - including 4 MB user-available memory storage for downloadable objects.
- 203 dpi (8 dots/mm) & 300 dpi (12 dots/mm) resolutions.
- Up to 6" / 177 mm per second print speed.

GoDEX

ENERGY STAR

Specification
EZ300 series

Desktop Printer

Model		EZ320	EZ330
Print Method		Thermal Transfer / Direct Thermal	
Resolution		203 dpi (8 dots/mm)	300 dpi (12 dots/mm)
Print Speed		Up to 6 IPS (152 mm/s)**	4 IPS (102 mm/s)**
Print Width		4.25" (108 mm)	4.16" (105.7 mm)
Print Length		Min. 0.16" (4 mm)**	Min. 0.16" (4 mm)**
		Max. 68" (1727 mm)	Max. 30" (762 mm)
Processor		32 Bit RISC CPU	
Memory	Flash	8 MB Flash (4 MB for user storage)	
	SDRAM	16 MB SDRAM	
Sensor Type		Adjustable reflective sensor	
		2 fixed transmissive sensors, central aligned	
Media	Types	Continuous form, gap labels, black mark sensing, and punched hole; label length set by auto sensing or programming	
	Width	1" (25.4 mm) Min. - 4.64" (118 mm) Max.	
	Thickness	0.003" (0.06 mm) Min. - 0.01" (0.25 mm) Max.**	
	Label Roll Diameter	Max. 5" (127 mm)	
	Core Diameter	1" (25.4 mm), 1.5" (38.1mm), 3" (76.2mm)	
Ribbon	Types	Wax, wax / resin, resin	
	Length	360' (110 m)	
	Width	1.18" Min. - 4.33" (30 mm - 110 mm) Max.	
	Ribbon Roll Diameter	1.57" (40 mm)	
	Core Diameter	0.5" (12.7 mm)	
Printer Language		EZPL, GEPL, GZPL auto switch	
Software	Label Design Software	GoLabel (for EZPL only)	
	Driver	MAC、Linux、Windows 2000, XP, Vista, Windows 7, 8.1 and 10 , Windows Server 2003 & 2008	
	DLL	Win CE, .NET, Andriod, Windows Mobile, Windows 2000 / XP / VISTA / Windows 7 / Windows 8.1	
Resident Fonts	Bitmap Fonts	Bitmap fonts: 6, 8, 10, 12, 14, 18, 24, 30, 16X26 and OCR A & B	
		Bitmap fonts 90°, 180°, 270° rotatable, single characters 90°, 180°, 270° rotatable	
		Bitmap fonts 8 times expandable in horizontal and vertical directions	
	TTF Fonts	TTF Fonts (Bold / Italic / Underline). 0°,90°, 180°, 270° rotatable	
Download Fonts	Bitmap Fonts	Bitmap fonts 90°, 180°, 270° rotatable, single characters 90°, 180°, 270° rotatable	
	Asian Fonts	90°, 180°, 270° rotatable and 8 times expandable in horizontal and vertical directions	
	TTF Fonts	TTF Fonts (Bold / Italic / Underline). 0°,90°, 180°, 270° rotatable	
Barcodes	1-D Bar codes	Code 39, Code 93, EAN-8, EAN-13, EAN 8/13 (with 2 & 5 digits extension), UPC-A, UPC-E, UPC-A and UPC-E with EAN 2 or 5 digit extension, Interleaved 2-of-5 (I 2 of 5), Interleaved 2- o-f 5 with Shipping Bearer Bars, Codabar, Code 128 (subset A, B, C), EAN 128, RPS 128, UCC 128, UCC/EAN-128 K-Mart, Random Weight, Postnet, ITF 14, China Postal Code, HIBC, MSI, Plessey, Telepen, FIM, GS1 DataBar, German Post Code, Planet 11 & 13 digit, Japanese Postnet, Standard 2 of 5, Industrial 2 of 5 , Logmars, Code 11, ISBT – 128 , Code 32	
	2-D Bar codes	PDF417, Datamatrix code, MaxiCode, QR code, Micro PDF417, Micro QR code and Aztec code, Code 49, Codablock F , TLC 39	
Code Pages		CODEPAGE 437, 850, 851, 852, 855, 857, 860, 861, 862, 863, 865, 866, 869, 737	
		WINDOWS 1250, 1251, 1252, 1253, 1254, 1255, 1257	
		Unicode UTF8、UTF16BE、UTF16LE	
Graphics		Resident graphic file types are BMP and PCX, other graphic formats are downloadable from the software	
Interfaces		USB Device (B-Type), Ethernet port (RJ-45)	
Control Panel		One Tri-color LED : Power (Green, Orange and Red)	
		Function Key : FEED	
Power		Auto Switching 100-240VAC, 50-60Hz.	
Environment	Operation Temperature	41°F to 104°F (5°C to 40°C)	
	Storage Temperature	-4°F to 122°F (-20°C to 50°C)	
Humidity	Operation	30-85%, non-condensing.	
	Storage	10-90%, non-condensing.	
Agency Approvals		CE(EMC)、FCC Class A、CB、cUL、EAC、CCC	
Dimension	Length	11.2" (285 mm)	
	Height	6.8" (171 mm)	
	Width	8.9" (226 mm)	
Weight		6 lbs (2.72 Kg) ,excluding consumables	
Options & Accessories		External label roll holder for 10" (250 mm) O.D. label rolls	
		External label rewinder T10	

**Specifications are subject to change without notice. All company and/or product names are trademarks and/or registered trademarks of their respective owners.

Minimum print height and maximum print speed specification compliance can be dependent on non-standard material variables such as label type, thickness, spacing, liner construction, etc. Godex is pleased to test non-standard materials for minimum print height and maximum print speed capability.

Applications

Applications for Labels & Barcodes

EZ300 series is your best friend for getting the job done.



Retail

Price tags, content labels, jewelry labels, courier tracking label, receipts for registered mails, bills of landing (B / L), postage labels, etc.

Warehouses, Logistic & Transportation

Shelf labels, product serial number labels, inventory management , shipping labels, pallet labels, carton labels , etc.

Administration

ID cards, document and records management, access control management, library management & organization and classification system, ISBN application, etc.

GoDEX

LABEL DESIGN SOFTWARE

GoLabel Software / User Friendly




GoLabel is based on a WYSIWYG (what you see is what you get) user interface, makes everything so easy for you to create and print barcode labels. GoLable is the first-choice label design software that you can't miss it!

Go visit www.godexintl.com and download GoLabel to experience it!

GoDEX

RIBBONS

High quality original GoDEX thermal transfer ribbons

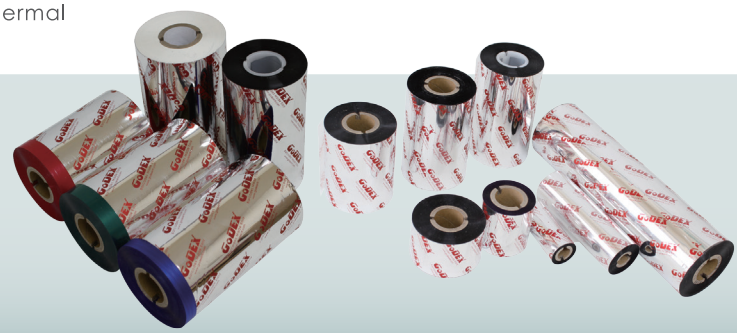

GoDEX offers premium thermal transfer ribbons that will fit most of your printing applications.

- Wax
- Wax/ Resin
- Resin
- Near Edge

GoDEX
www.godexintl.com

Godex International
(Headquarters)
Telephone : +886 2 2225 8580
Contact us : infoGT@godexintl.com

Godex Americas
Telephone : +1 805 987 5100
Contact us : infoGA@godexintl.com

Godex China
Telephone : +86 21 56651313
Contact us : infoGC@godexintl.com

Godex Europe
Telephone : +49 2193 53396 0
Contact us : infoGE@godexintl.com