

# Field Activity Report

Project File: CENTRA CARE VIERA\_Electrical Plans.pdf

Technician: admin



Role: admin

Date: 20/1/2026

Activity Description:

sfasfas

Plan Snapshot (Current View)

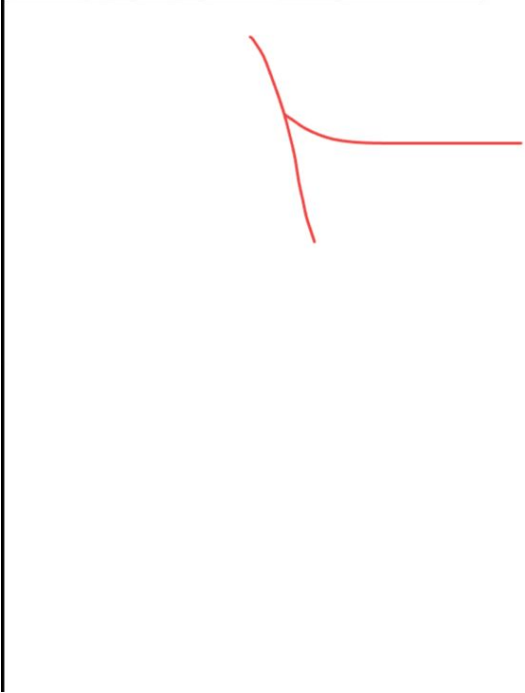

LIGHTING F	
TYPE	DESCRIPTION
D1 D1/EM	RECESSED LED DOWNLIGHT. 4" APERTURE. 1,341 LUMENS. 4000° COLOR ° DIMMING. SELF FLANGED WITH CHROME TRIM RING. METALLIC SILVER REFI ELITE HH4-1200L-DIM10-MVOLT-MD-40K-85-HH44501-CL-SCH ADD "EMG-LED10W" FOR 10W EMERGENCY BATTERY PACK OWNER/ ENGINEER APPROVED EQUAL
T2 T2/EM	2'X2' ARCHITECTURAL LED TROFFER. 120-277V, SELECTABLE LUMENS & POLYCARBONATE LENS W/ CENTER DIFFUSER. 0-10V DIMMING ELITE 22-EDGE-LED-2000L/3000L/4000L-DIM10-MVOLT-30K/35K/40K- ADD "O-EMG-LED-10W" TO MODEL NO. FOR 10W EMERGENCY BATTERY I OWNER/ ENGINEER APPROVED EQUAL
T4 T4/EM	2'X4' ARCHITECTURAL LED TROFFER. 120-277V, SELECTABLE LUMENS & POLYCARBONATE LENS W/ CENTER DIFFUSER. 0-10V DIMMING ELITE 24-EDGE-LED-3000L/4000L/5000L-DIM10-MVOLT-30K/35K/40K- ADD "O-EMG-LED-10W" TO MODEL NO. FOR 10W EMERGENCY BATTERY I OWNER/ ENGINEER APPROVED EQUAL
PA	LED BLUE GLASS PENDANT LIGHT. 5" DIAMETER X 10" TALL. 120 VOLT. I BICYCLE GLASS CO. 147 LUNAR SINGLE PENDANT H1-PEN01-BN1-04-SL