

# Monitoring Energy Consumption using Arduino

Kasandikromo Guillian, Karg Timothy, and Uraicia  
Sewpersad

Vanguard Community College -  
Department of Engineering

November 14, 2024

## Abstract

This project explains how to set up an Arduino-based system to measure and monitor energy use, making the data accessible in real-time through cloud storage and a web app. As energy optimization becomes more important, this setup provides accurate and easily accessible energy data to help users make informed decisions.

The system uses an Arduino microcontroller with a YHDC Current Transformer SCT-013-000 sensor to measure current. The Arduino converts this data into energy consumption readings in kilowatt-hours (kWh) after first calculating power (watts) and then energy (watt-seconds). Every 10 seconds, this data is sent to a cloud-based PostgreSQL database via a Python script, which connects to the Arduino's serial output.

To make the data easy to view and analyze, a web app built with Flask and Dash lets users filter data by month or day to explore detailed energy usage patterns. The app also updates automatically, so the latest measurements are always available. With data stored in the cloud, users can monitor energy use from anywhere, helping them identify opportunities to save energy.

Overall, this system combines Arduino's compatibility with various sensors and the cloud's accessibility, creating a reliable and scalable solution for tracking energy usage in real time.

## I. Introduction

This project aims to develop and deploy an Energy Monitor system, designed to provide real-time energy consumption data for a residential setting. The core component of the system is an Arduino-based microcontroller, responsible for collecting and processing energy consumption data from various sensors. This data is then transmitted to a web server, allowing for remote monitoring and analysis.

The web application, built using Python and Flask, provides a user-friendly interface to visualize energy consumption patterns, identify potential areas for energy savings, and generate insightful reports. This project leverages the power of open-source technologies to create a

cost-effective and customizable solution for energy monitoring.

Key Features:

- Real-time monitoring: The system provides up-to-date energy consumption data.
- Remote access: Users can access and analyze data from anywhere with an internet connection.
- Data visualization: The web application offers various visualization tools for easy data interpretation.
- Energy efficiency insights: The system helps identify areas for energy savings and optimization.

This document will detail the system's architecture, hardware implementation, software development, and deployment process. It will also include a comprehensive evaluation of the system's performance and potential future enhancements.

## II. Materials

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

### i. Arduino Micro-controller

- Microcontroller: The heart of the project. It processes the data received from sensors, performs calculations, and controls other components.
- Digital and Analog Pins: These pins are used to connect sensors and actuators. Digital pins provide high or low signals, while analog pins can read varying voltage levels.
- Power Supply: The board can be powered by a USB cable or an external power supply.
- Serial Communication: The board can communicate with a computer or other devices using a serial connection.

ii. *YHDC Current Transformer SCT-013-000*

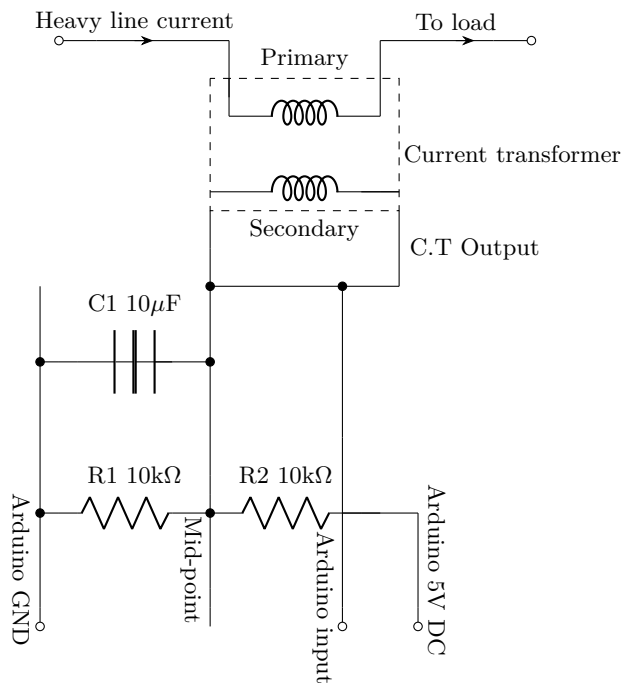


Figure 1: Current transformer circuit with Arduino

- **Non-invasive Measurement:** It measures the current flowing through a wire without physically breaking the circuit.
- **Magnetic Induction:** It works based on the principle of electromagnetic induction.
- **Output Signal:** It produces a small AC voltage proportional to the current flowing through the wire.
- **Safety:** It allows for safe measurement of high currents without the risk of electric shock.

iii. *Liquid Crystal Display*

- **Display:** It displays information like voltage, current, power consumption, and other relevant data.
- **Backlight:** It provides illumination for better visibility.
- **Interface:** It connects to the Arduino board through digital pins to receive and display data.
- **Types:** There are various types of LCDs, including character LCDs and graphic LCDs. [1]

iv. *Other Potential Components:*

- **Voltage Sensor:** Measures the voltage entering the circuit.
- **Temperature Sensor:** Monitors the temperature of the system or environment.

- **Power Supply:** Provides the necessary power for the Arduino and other components.
- **Resistors:** Used to limit current and divide voltage.
- **Capacitors:** Used to filter noise and store energy.

### III. System Design

The energy monitoring system consists of three main components: the Arduino microcontroller, the YHDC Current Transformer (CT) SCT-013-000 sensor, and a cloud-based PostgreSQL database accessible through a web application. Each component plays a vital role in capturing, processing, storing, and displaying energy consumption data in real-time.

i. *Hardware Components*

The system's hardware includes:


- **Arduino Microcontroller:** The Arduino serves as the primary data collection unit, converting analog signals from sensors to digital data for processing. It calculates the instantaneous power and energy usage based on current measurements from the CT sensor.
- **YHDC SCT-013-000 Current Transformer Sensor:** This non-invasive sensor measures the AC current flowing through a wire. It generates an analog signal proportional to the current, which is read by the Arduino's analog input.
- **AC-to-AC Power Adapter:** To measure AC voltage, an AC-to-AC adapter is used. This adapter steps down the AC voltage to a safe level compatible with the Arduino's analog input, allowing it to monitor real-world voltage values accurately.

ii. *Software Components*

The software components of the system include:

- **Data Processing on Arduino:** The Arduino processes signals from the CT sensor and calculates power by combining current and voltage values. The calculated energy data is sent to a local SQLite database, which is later synced with a cloud database.
- **Python Data Transfer Script:** A Python script interfaces with the Arduino's serial monitor and transfers the processed data to a cloud-based PostgreSQL database at intervals of 10 seconds.
- **Flask Web Application:** A Flask-based application with Dash visualizes the data, allowing users to filter by month and day to observe consumption trends. This user interface provides an accessible and flexible way to monitor energy usage over time.

iii. *Data Flow and Operation*

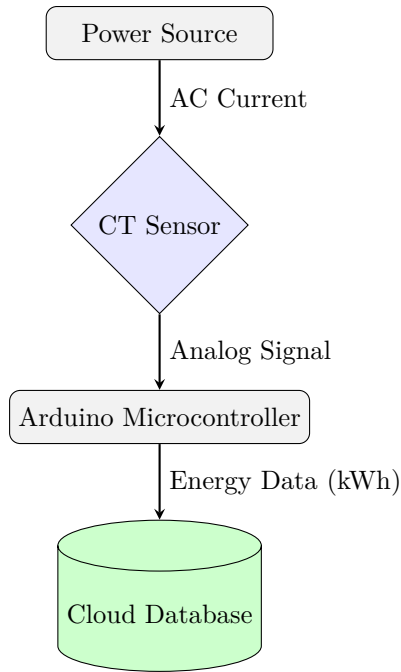

Data stored in PostgreSQL database  
accessible by web app

Figure 2: Process Flow Diagram of the Energy Monitoring System

The system operates as follows:

1. The Arduino reads analog signals from the CT sensor and the AC-to-AC adapter.
2. It processes these signals, calculates energy consumption in watt-seconds (later converted to kWh), and sends the data to the Python script.
3. The Python script logs the data in a local SQLite database, which then syncs to a PostgreSQL cloud database every 10 seconds.
4. The web app fetches the latest data from the cloud database, displaying it with interactive filters for user analysis.


This modular design, combining hardware and software elements, enables real-time, remote monitoring of energy usage.

## IV. Measuring AC Voltage with an AC to AC power adapter

Table 1: AC-AC Voltage Transformer Data

V (input) (V)	I (mA)	V(output) (mV)
10	0.59	3.6
20	1.15	8.6
30	1.7	12.8
40	2.25	16.9
50	2.8	21.2
60	3.4	25.3
70	3.96	29.6
80	4.52	33.6
90	5	38
100	5.67	42.2
110	6.21	46.4
120	6.77	51
130	7.38	55.2
140	7.9	59.1

AC-AC Voltage Transformer Input vs. Output

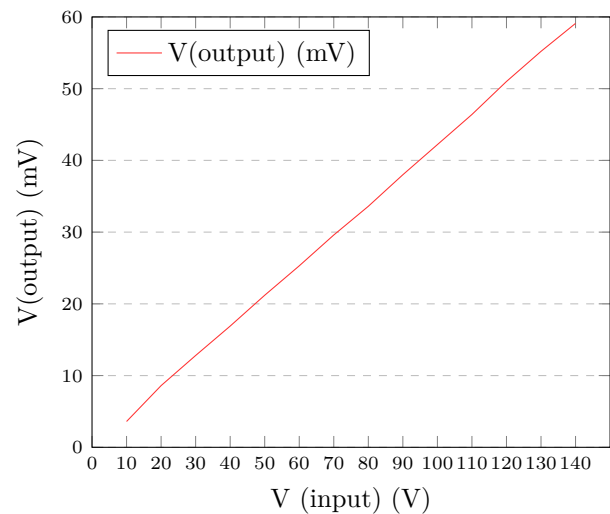


i. *AC-AC Power Adapter Schematic*

The circuit is designed to measure AC voltage using an Arduino, an AC-AC power adapter, and a voltage divider. The AC-AC adapter supplies the input voltage ( $V_{in}$ ) to the circuit. The voltage divider, made of resistors  $R_1$  and  $R_2$ , steps down the AC voltage to a safe level for the Arduino's 0-5V input range. The resistors are selected to ensure the voltage stays within the Arduino's limits.

To allow the Arduino to read both positive and negative portions of the AC waveform, the signal is biased to a 2.5V reference using resistors  $R_3$  and  $R_4$ . Capacitor  $C_1$  filters high-frequency noise, ensuring clean signal measurement. A coupling capacitor ( $C_2$ ) isolates the DC bias while passing the AC signal to the Arduino's analog input, where it is digitized for further analysis. This setup enables safe, accurate measurement of AC voltage for energy monitoring.

~ AC-AC Adapter

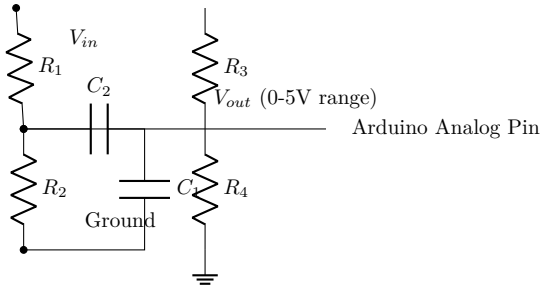

## References

- [1] OpenEnergyMonitor, "Learn: Electricity monitoring," <https://docs.openenergymonitor.org/electricity-monitoring/index.html#learn-electricity-monitoring>, accessed: 2024-04-30.

Figure 3: Voltage Divider with Filtering and Biasing for Arduino Analog Input